


OIL ANALYSIS REPORT

No Info On Sample [No Info On Sample] NOT GIVEN PCA0121344

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- G





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| GAL) | | | | Jun2024 | | |
|---------------------------|----------|-------------|-------------|---------------|----------|----------|
| SAMPLE INFORI | MATION | method | limit/base | current | history1 | history2 |
| | VIATION | | IIIIII/Dase | | | HISTOTYZ |
| Sample Number | | Client Info | | PCA0121344 | | |
| Sample Date | | Client Info | | 23 Jun 2024 | | |
| Machine Age | mls | Client Info | | 0 | | |
| Oil Age | mls | Client Info | | 0 N/A | | |
| Oil Changed Sample Status | | Client Info | | N/A NORMAL | | |
| | | | | NORWAL | | |
| CONTAMINAT | ION | method | limit/base | current | history1 | history2 |
| Fuel | | WC Method | >5 | <1.0 | | |
| Water | | WC Method | >0.2 | NEG | | |
| Glycol | | WC Method | | NEG | | |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >100 | 36 | | |
| Chromium | ppm | ASTM D5185m | >20 | 5 | | |
| Nickel | ppm | ASTM D5185m | >4 | <1 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | >3 | 1 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 29 | | |
| Lead | ppm | ASTM D5185m | >40 | <1 | | |
| Copper | ppm | ASTM D5185m | >330 | 27 | | |
| Tin | ppm | ASTM D5185m | >15 | 1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 2 | 2 | | |
| Barium | ppm | ASTM D5185m | 0 | 1 | | |
| Molybdenum | ppm | ASTM D5185m | 50 | 62 | | |
| Manganese | ppm | ASTM D5185m | 0 | 2 | | |
| Magnesium | ppm | ASTM D5185m | 950 | 934 | | |
| Calcium | ppm | ASTM D5185m | 1050 | 1134 | | |
| Phosphorus | ppm | ASTM D5185m | 995 | 980 | | |
| Zinc | ppm | ASTM D5185m | 1180 | 1240 | | |
| Sulfur | ppm | ASTM D5185m | 2600 | 2612 | | |
| CONTAMINAN | TS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 10 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 60 | | |
| INFRA-RED | | method | limit/base | current | history1 | history2 |
| Soot % | % | *ASTM D7844 | >3 | 0.5 | | |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.5 | | |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.5 | | |
| FLUID DEGRA | DATION | method | limit/base | current | history1 | history2 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 18.0 | | |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 6.9 | | |
| . , | | | | | | |



OIL ANALYSIS REPORT

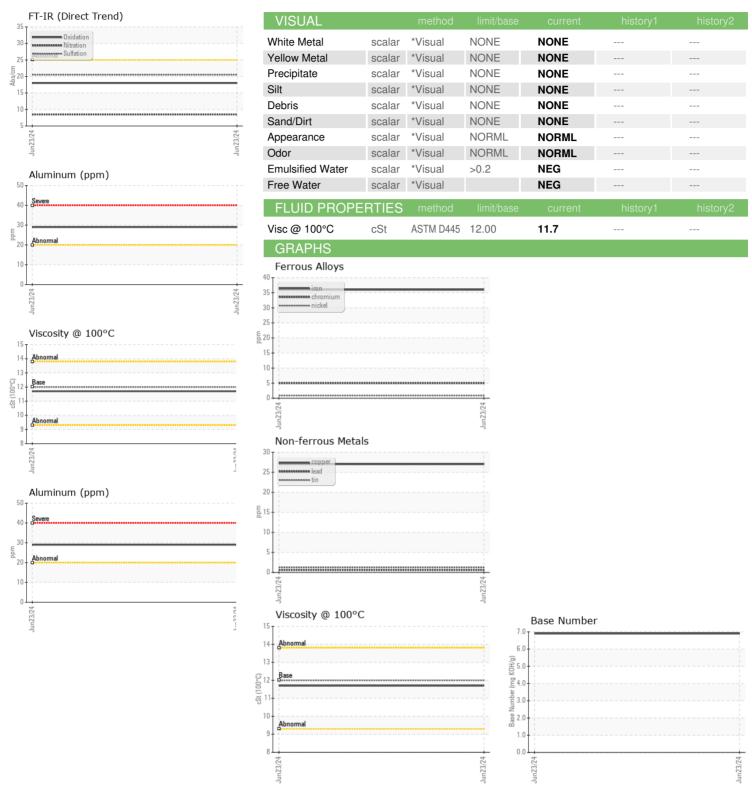





Certificate 12367

Laboratory Sample No.

Lab Number : 06217880 Unique Number : 11096077

Test Package : FLEET

: PCA0121344

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 24 Jun 2024 **Tested**

: 25 Jun 2024 Diagnosed : 25 Jun 2024 - Wes Davis

Transervice - Shop 1369 - Berkeley-Waxahachie 710 Ovilla Road Waxahachie, TX

US 75167 Contact: Robert Beal rbeal@transervice.com

T: (972)923-9928

F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)