


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

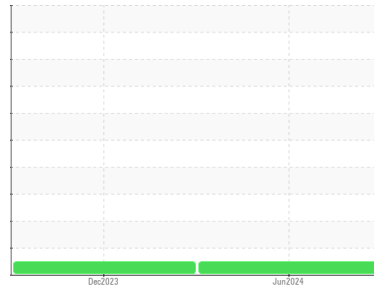

Area
(51470Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A63317
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0121312	PCA0106516	---
Sample Date	Client Info			17 Jun 2024	19 Dec 2023	---
Machine Age	mls	Client Info		218480	140253	---
Oil Age	mls	Client Info		30000	60000	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	15	43	---
Chromium	ppm	ASTM D5185m	>5	2	3	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>30	6	17	---
Lead	ppm	ASTM D5185m	>30	2	0	---
Copper	ppm	ASTM D5185m	>150	8	43	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<1	4	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	60	119	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	950	977	884	---
Calcium	ppm	ASTM D5185m	1050	1164	1076	---
Phosphorus	ppm	ASTM D5185m	995	1058	829	---
Zinc	ppm	ASTM D5185m	1180	1340	1113	---
Sulfur	ppm	ASTM D5185m	2600	3431	2194	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5	7	---
Sodium	ppm	ASTM D5185m		1	0	---
Potassium	ppm	ASTM D5185m	>20	13	61	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	7.8	9.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	23.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	21.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.7	4.6	---





OIL ANALYSIS REPORT

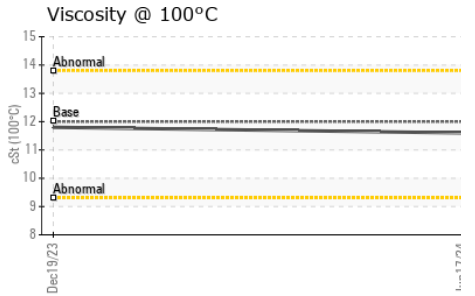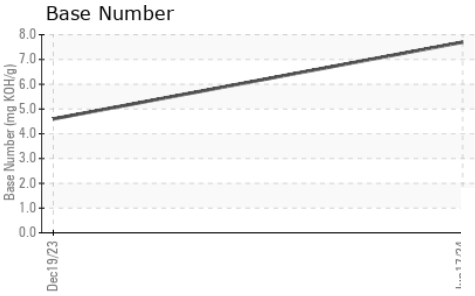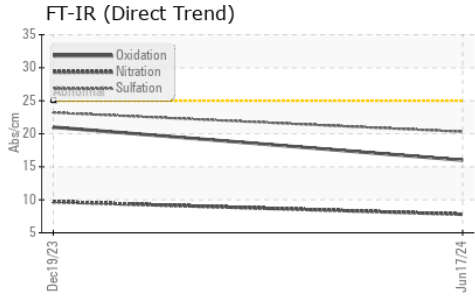

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.6	11.8

GRAPHS

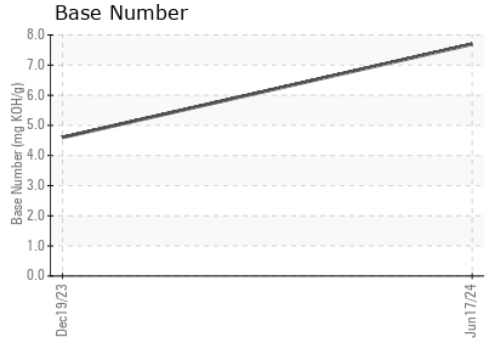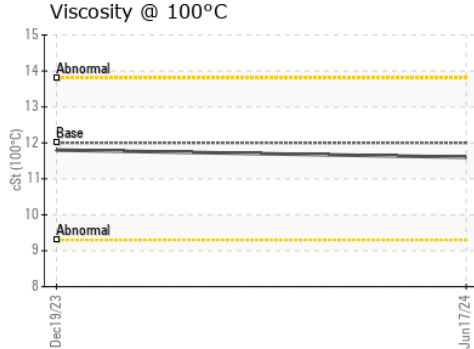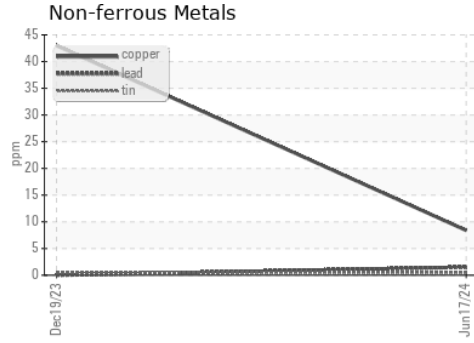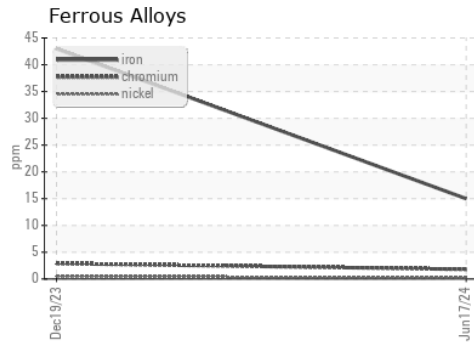

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0121312
Lab Number : **06219056**
Unique Number : 11097253
Test Package : FLEET

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

Transervice - Shop 1369 - Berkeley-Waxahachie
 710 Ovilla Road
 Waxahachie, TX
 US 75167

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Robert Beal
 rbeal@transervice.com
 T: (972)923-9928
 F: (972)923-9919