




PROBLEM SUMMARY

Sample Rating Trend

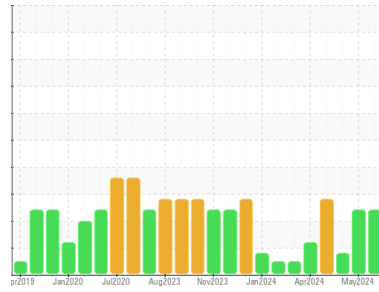

FUEL





Machine Id
723024-361659

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

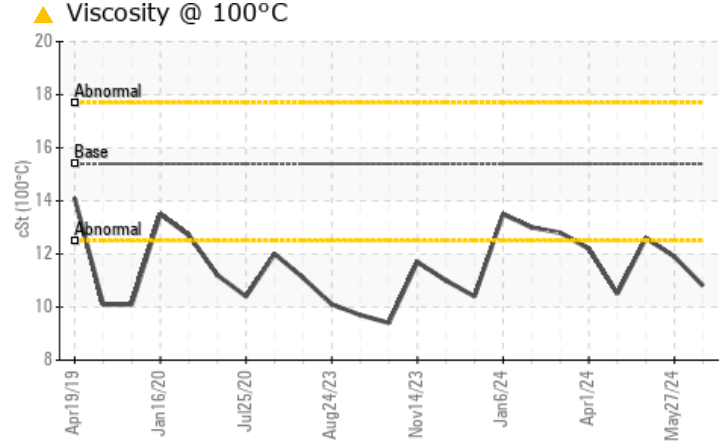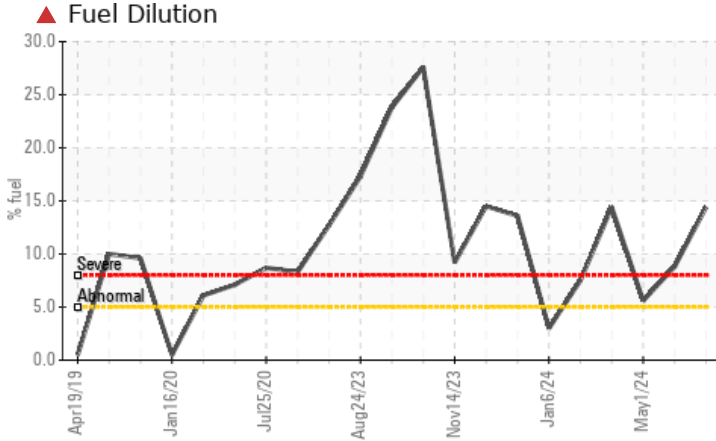

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Fuel	%	ASTM D3524	>5	▲ 14.4	▲ 8.8	▲ 5.6
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	▲ 11.9	12.6

Customer Id: GFL837
 Sample No.: GFL0122903
 Lab Number: 06219159
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

FUEL



27 May 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



FUEL



01 May 2024 Diag: Wes Davis

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



FUEL



15 Apr 2024 Diag: Wes Davis

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

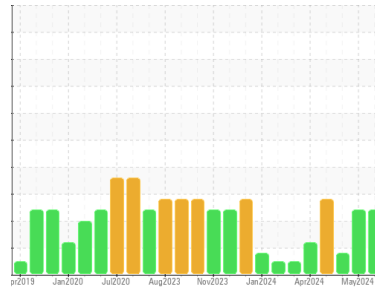

FUEL



Machine Id
723024-361659

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0122903	GFL0122839	GFL0118781
Sample Date	Client Info		20 Jun 2024	27 May 2024	01 May 2024
Machine Age	hrs	Client Info	28166	28027	27860
Oil Age	hrs	Client Info	28077	27938	27771
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	6	4	<1
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	2	1
Lead	ppm	ASTM D5185m >40	0	<1	0
Copper	ppm	ASTM D5185m >330	<1	<1	0
Tin	ppm	ASTM D5185m >15	0	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	2	2
Barium	ppm	ASTM D5185m 0	0	<1	0
Molybdenum	ppm	ASTM D5185m 60	49	54	54
Manganese	ppm	ASTM D5185m 0	0	0	<1
Magnesium	ppm	ASTM D5185m 1010	826	841	881
Calcium	ppm	ASTM D5185m 1070	962	1015	1002
Phosphorus	ppm	ASTM D5185m 1150	908	1052	989
Zinc	ppm	ASTM D5185m 1270	1111	1155	1168
Sulfur	ppm	ASTM D5185m 2060	3063	3130	3327

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	4	2
Sodium	ppm	ASTM D5185m	4	3	4
Potassium	ppm	ASTM D5185m >20	<1	2	<1
Fuel	%	ASTM D3524 >5	▲ 14.4	▲ 8.8	▲ 5.6

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	9.7	8.1	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.7	19.3	19.4


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.9	15.7	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	7.9	8.3




OIL ANALYSIS REPORT


▲ Fuel Dilution

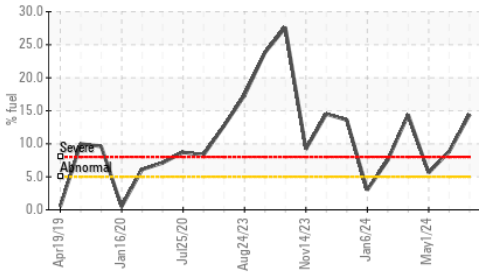


● FT-IR (Direct Trend)

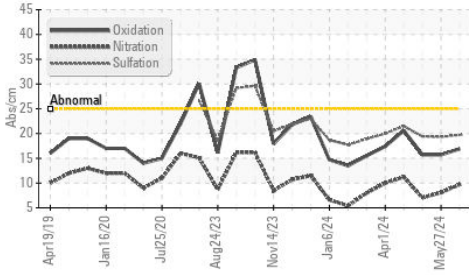

● FT-IR (Direct Trend)

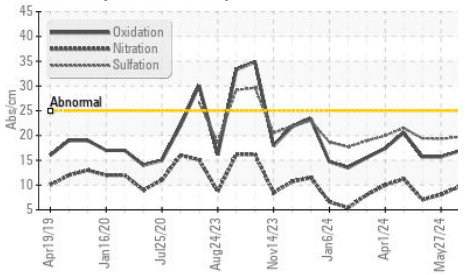

Base Number

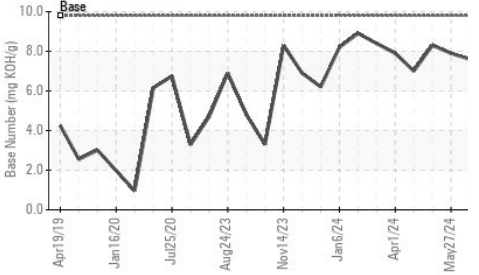

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	▲ 11.9

GRAPHS


Ferrous Alloys

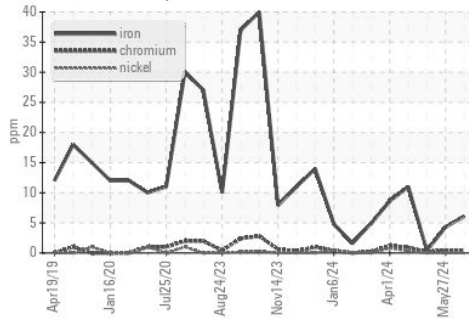


Non-ferrous Metals

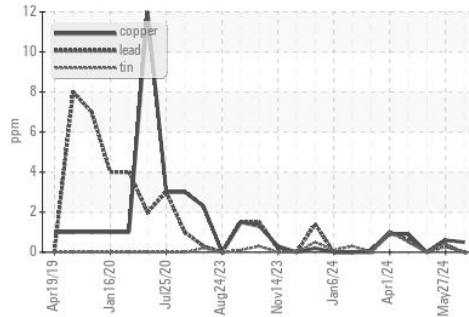

▲ Viscosity @ 100°C

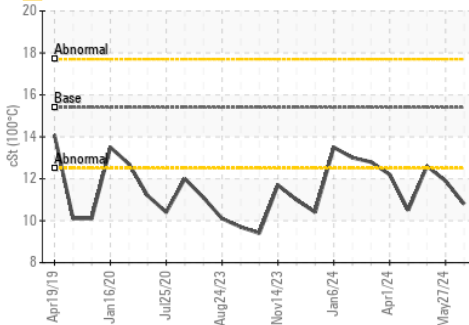

Base Number

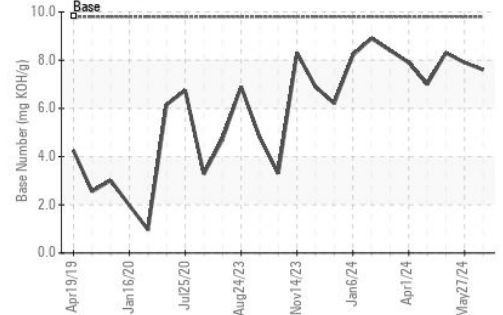

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0122903

Lab Number : 06219159

Unique Number : 11097356

Test Package : FLEET (Additional Tests: PercentFuel)

Received : 24 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 26 Jun 2024 - Wes Davis

GFL Environmental - 837 - Harrison TS

22820 S State Route 291

Harrisonville, MO

US 64701

Contact: SARA PATRICK

spatrack@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)