




OIL ANALYSIS REPORT

Area
(62A1N88) ALEXANDER CITY
 Machine Id
10818
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

Sample Rating Trend

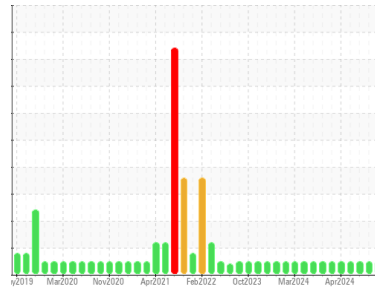

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0085974	GFL0085976	GFL0079733
Sample Date	Client Info			17 Jun 2024	06 Jun 2024	23 May 2024
Machine Age	hrs Client Info			7006	16980	16909
Oil Age	hrs Client Info			7006	2578	2507
Oil Changed	Client Info			N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>75		16	6	3
Chromium	ppm ASTM D5185m	>5		<1	<1	0
Nickel	ppm ASTM D5185m	>4		<1	0	0
Titanium	ppm ASTM D5185m	>2		<1	0	0
Silver	ppm ASTM D5185m	>2		<1	0	0
Aluminum	ppm ASTM D5185m	>15		4	2	2
Lead	ppm ASTM D5185m	>25		<1	0	0
Copper	ppm ASTM D5185m	>100		2	2	0
Tin	ppm ASTM D5185m	>4		<1	0	<1
Vanadium	ppm ASTM D5185m			<1	0	0
Cadmium	ppm ASTM D5185m			<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0		36	39	16
Barium	ppm ASTM D5185m	0		1	0	0
Molybdenum	ppm ASTM D5185m	60		63	65	57
Manganese	ppm ASTM D5185m	0		<1	0	<1
Magnesium	ppm ASTM D5185m	1010		784	807	862
Calcium	ppm ASTM D5185m	1070		1054	1034	978
Phosphorus	ppm ASTM D5185m	1150		990	939	966
Zinc	ppm ASTM D5185m	1270		1116	1120	1141
Sulfur	ppm ASTM D5185m	2060		2998	3180	3239

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25		6	4	4
Sodium	ppm ASTM D5185m			19	7	11
Potassium	ppm ASTM D5185m	>20		8	3	<1


INFRA-RED		method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>6		0.3	0.2	0.2
Nitration	Abs/cm *ASTM D7624	>20		7.0	6.3	6.9
Sulfation	Abs/.1mm *ASTM D7415	>30		18.0	17.9	17.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25		13.2	13.4	13.4
Base Number (BN)	mg KOH/g ASTM D2896	9.8		8.0	8.2	8.1




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

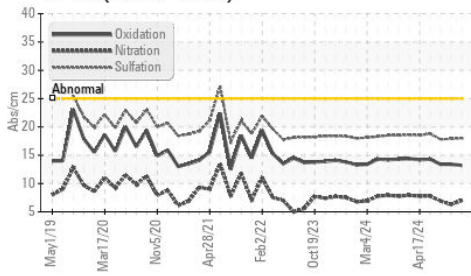

Base Number

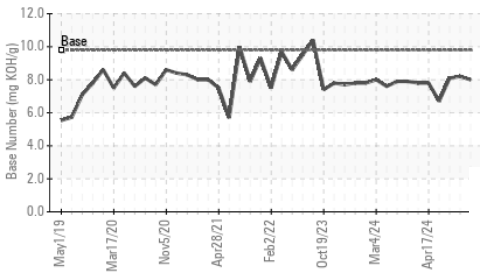

Viscosity @ 100°C

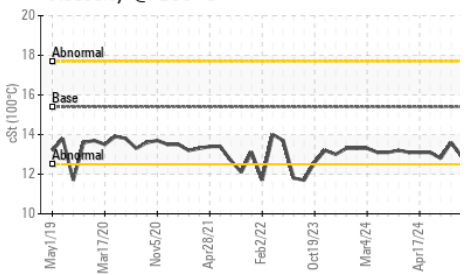


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.6

GRAPHS


Ferrous Alloys

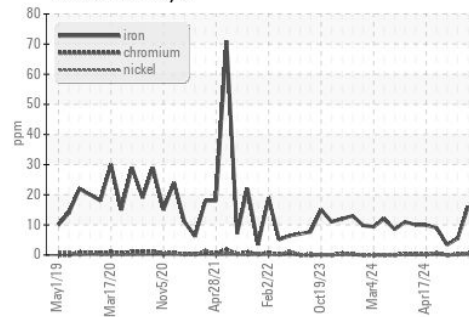


Non-ferrous Metals

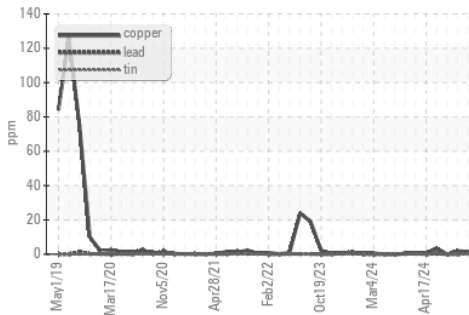

Viscosity @ 100°C

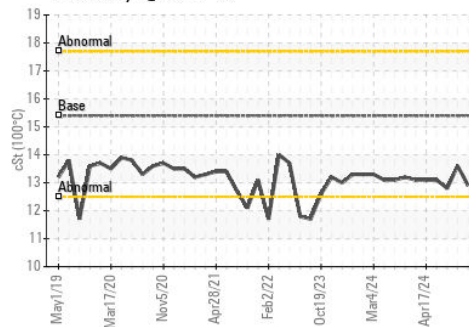

Base Number

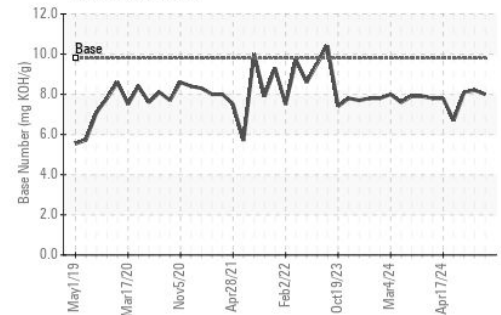

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0085974
Lab Number : 06219288
Unique Number : 11097485
Test Package : FLEET

Received : 25 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee
 Multiple Sites
 Montgomery, AL
 US 36108
 Contact: BRANDON HURST
 brandonhurst@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: