




PROBLEM SUMMARY

Sample Rating Trend


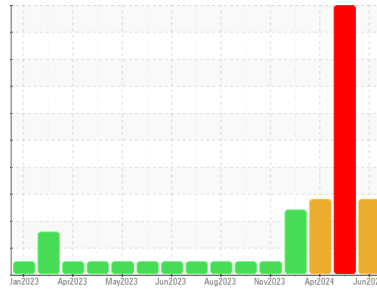


FUEL



Area
(62A1N8X) TALLASSEE
 Machine Id
921070
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

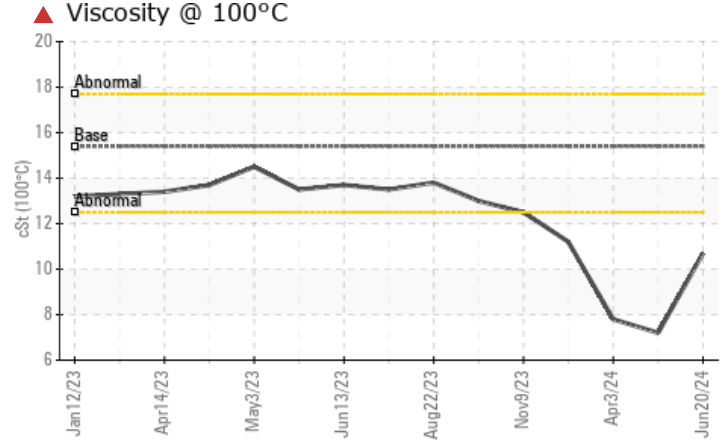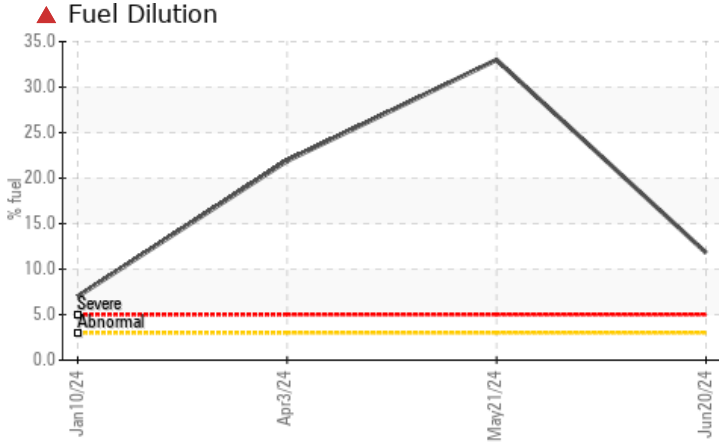

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>3.0	▲ 11.8	▲ 33.0	▲ 21.9
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.7	▲ 7.2	▲ 7.8

Customer Id: GFL172
 Sample No.: GFL0081924
 Lab Number: 06219329
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

WEAR



21 May 2024 Diag: Jonathan Hester

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. The aluminum level is severe. There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material. Fuel is present in the oil and is lowering the viscosity. The BN level is low. The oil is no longer serviceable due to the presence of contaminants.

view report



FUEL



03 Apr 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



FUEL



10 Jan 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

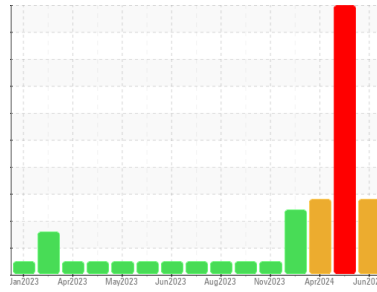

FUEL



Area
(62A1N8X) TALLASSEE
 Machine Id
921070
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation
 We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0081924	GFL0080673	GFL0092438
Sample Date	Client Info	20 Jun 2024	21 May 2024	03 Apr 2024
Machine Age	hrs	8455	8207	7937
Oil Age	hrs	8455	8207	7937
Oil Changed	Client Info	N/A	Not Changd	Not Changd
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	6	61	18
Chromium	ppm ASTM D5185m >20	<1	1	0
Nickel	ppm ASTM D5185m >5	<1	<1	0
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	<1	0	0
Aluminum	ppm ASTM D5185m >20	7	▲ 167	2
Lead	ppm ASTM D5185m >40	<1	2	<1
Copper	ppm ASTM D5185m >330	3	7	1
Tin	ppm ASTM D5185m >15	<1	1	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	2	2
Barium	ppm ASTM D5185m 0	1	0	0
Molybdenum	ppm ASTM D5185m 60	52	40	45
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 1010	795	570	731
Calcium	ppm ASTM D5185m 1070	921	665	830
Phosphorus	ppm ASTM D5185m 1150	878	601	789
Zinc	ppm ASTM D5185m 1270	1039	777	952
Sulfur	ppm ASTM D5185m 2060	2620	1670	2463

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	▲ 31	7
Sodium	ppm ASTM D5185m	2	11	7
Potassium	ppm ASTM D5185m >20	2	4	<1
Fuel	% ASTM D3524 >3.0	▲ 11.8	▲ 33.0	▲ 21.9

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.1	0.5	0.4
Nitration	Abs/cm *ASTM D7624 >20	6.2	14.3	9.2
Sulfation	Abs/.1mm *ASTM D7415 >30	17.6	24.2	19.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.8	27.9	16.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.0	▲ 2.2	4.4







OIL ANALYSIS REPORT

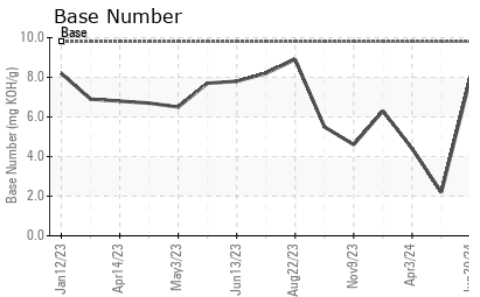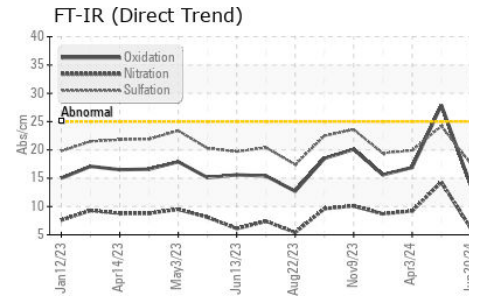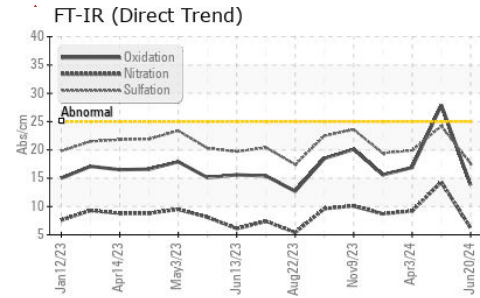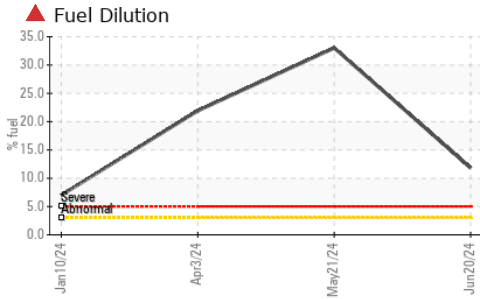

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.7	▲ 7.2

GRAPHS

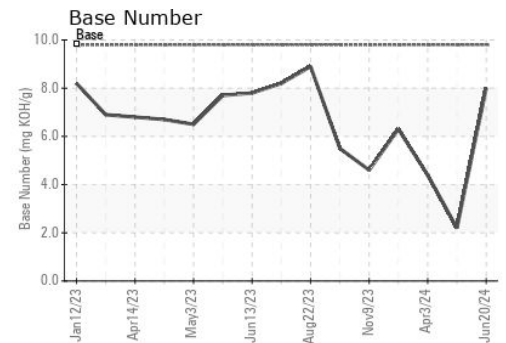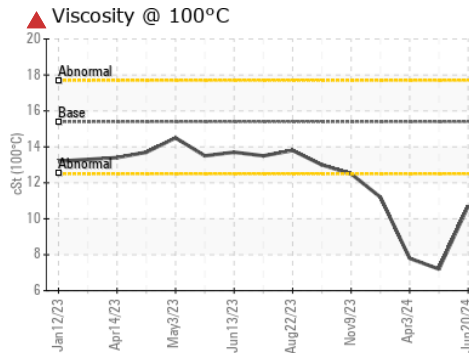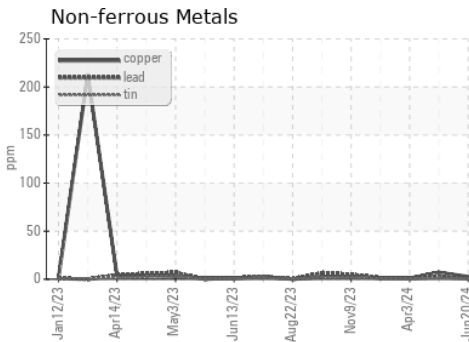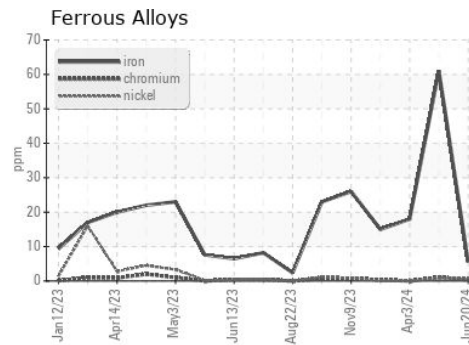

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0081924
Lab Number : 06219329
Unique Number : 11097526
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee
 Multiple Sites
 Montgomery, AL
 US 36108
 Contact: RICHARD HATFIELD
 rhatfield@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)