


OIL ANALYSIS REPORT







Machine Id 2227111

Front Rear Diesel Engine

DIESEL ENGINE OIL SAE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

			Feb 2024	Jun2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0128345	PCA0119547	
Sample Date		Client Info		10 Jun 2024	19 Feb 2024	
Machine Age	mls	Client Info		41006	0	
Oil Age	mls	Client Info		19943	21063	
Oil Changed		Client Info		Not Changd	Changed	
Sample Status				NORMAL	ABNORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	25	32	
Chromium	ppm	ASTM D5185m	>20	<1	<1	
Nickel	ppm	ASTM D5185m	>4	5	1	
Titanium	ppm	ASTM D5185m		32	<1	
Silver	ppm	ASTM D5185m	>3	5	16	
Aluminum	ppm	ASTM D5185m	>20	15	31	
Lead	ppm	ASTM D5185m	>40	0	2	
Copper	ppm	ASTM D5185m	>330	134	38	
Tin	ppm	ASTM D5185m	>15	<1	5	
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	25	170	
Barium	ppm	ASTM D5185m	10	0	0	
Molybdenum	ppm	ASTM D5185m	100	48	108	
Manganese	ppm	ASTM D5185m		2	5	
Magnesium	ppm	ASTM D5185m	450	759	608	
Calcium	ppm	ASTM D5185m	3000	1453	1501	
Phosphorus	ppm	ASTM D5185m	1150	1032	693	
Zinc	ppm	ASTM D5185m	1350	1229	770	
Sulfur	ppm	ASTM D5185m	4250	3699	2625	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	17	△ 61	
Sodium	ppm	ASTM D5185m		4	6	
Potassium	ppm	ASTM D5185m	>20	40	82	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.2	
Nitration	Abs/cm	*ASTM D7624	>20	9.4	10.0	
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	24.1	
FLUID DEGRA	OATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	22.9	
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.2	7.3	




OIL ANALYSIS REPORT

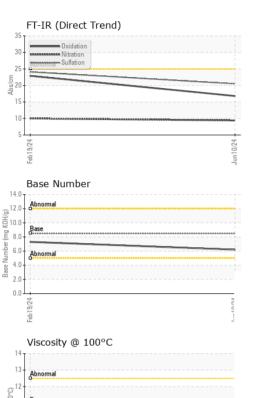


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	


FLUID PROPI	ERITES	method			HISTORY	Historyz
Visc @ 100°C	cSt	ASTM D445	10.9	10.5	9.3	

GRAPHS



Non-ferrous Metals	
120 copper	
100	
80	
60	
40	
20	
0	-
Feb 19/24	Jun10/24
-g-	Jun
Viscosity @ 100°C	



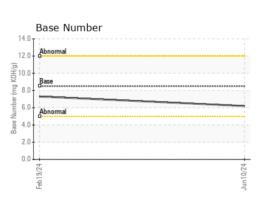





Certificate 12367

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. : PCA0128345 Lab Number : 06219406 Unique Number : 11097603 Test Package : FLEET

Received : 25 Jun 2024 Tested : 25 Jun 2024

: 25 Jun 2024 - Wes Davis Diagnosed

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PERDUE FARMS - GEORGETOWN

20621 SAVANAH RD GEORGETOWN, DE

US 19947 Contact: ROBERT LOCKWOOD Robert.Lockwood@Perdue.com

T: F: