


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

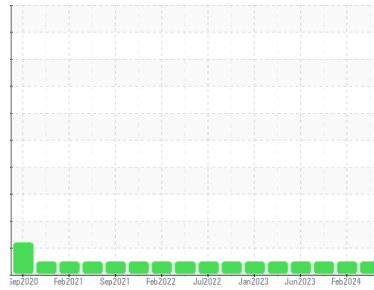

Machine Id  
**2026813**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (35 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0121402</b>	PCA0114758	PCA0112396
Sample Date	Client Info			<b>27 Mar 2024</b>	02 Feb 2024	16 Nov 2023
Machine Age	mls	Client Info		<b>0</b>	358352	337895
Oil Age	mls	Client Info		<b>40000</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>40</b>	22	41
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>37</b>	32	1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	3	4
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	3	1
Copper	ppm	ASTM D5185m	>330	<b>8</b>	6	9
Tin	ppm	ASTM D5185m	>15	<b>0</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	<1




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>13</b>	23	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>32</b>	28	58
Manganese	ppm	ASTM D5185m	0	<b>1</b>	1	<1
Magnesium	ppm	ASTM D5185m	950	<b>719</b>	595	899
Calcium	ppm	ASTM D5185m	1050	<b>1449</b>	1293	1013
Phosphorus	ppm	ASTM D5185m	995	<b>1010</b>	936	974
Zinc	ppm	ASTM D5185m	1180	<b>1256</b>	1041	1181
Sulfur	ppm	ASTM D5185m	2600	<b>4050</b>	3724	3474

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	5
Sodium	ppm	ASTM D5185m		<b>3</b>	2	1
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	8.9	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	20.4	23.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.4</b>	16.5	20.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.0</b>	6.7	6.5





# OIL ANALYSIS REPORT

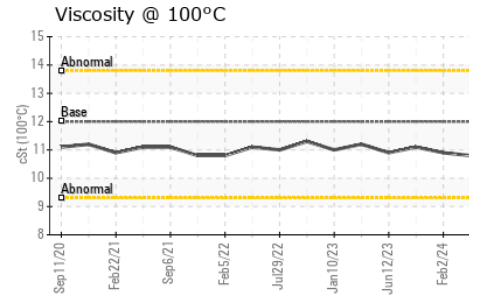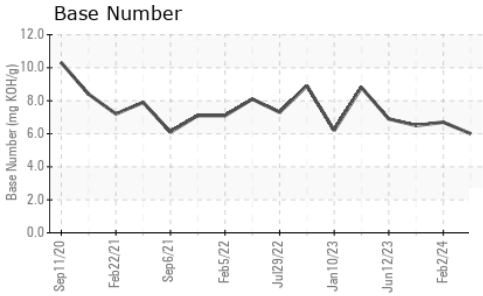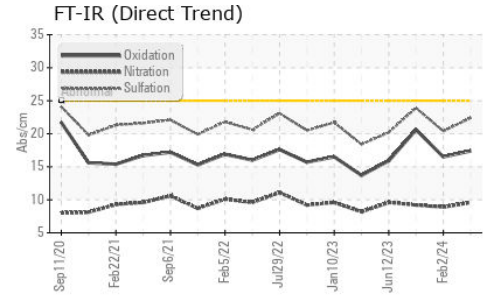

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	10.9

## GRAPHS

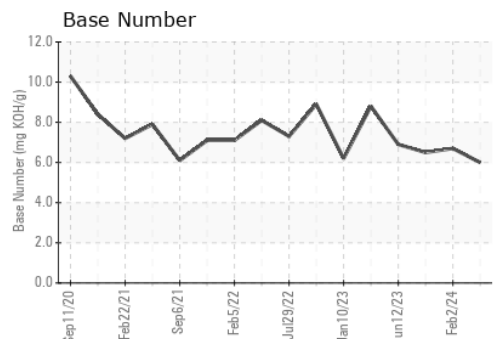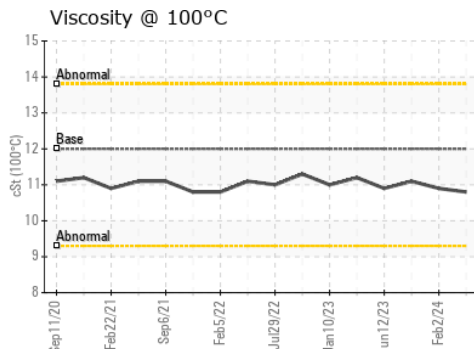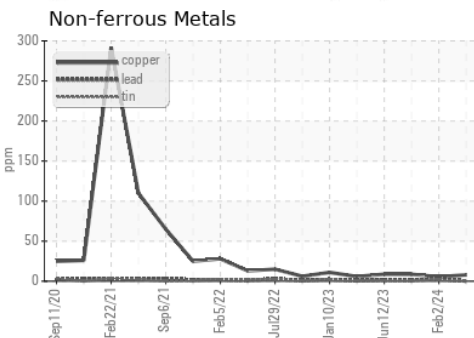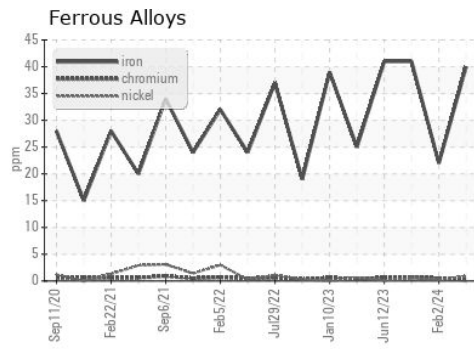

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121402  
**Lab Number** : 06219419  
**Unique Number** : 11097616  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)