


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

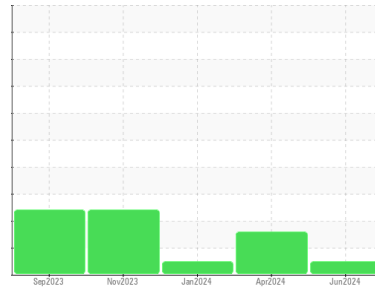

Machine Id
2227061
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0113269	PCA0124563	PCA0113264
Sample Date	Client Info			09 Jun 2024	14 Apr 2024	08 Jan 2024
Machine Age	mls	Client Info		0	86361	64874
Oil Age	mls	Client Info		20000	45000	21388
Oil Changed	Client Info			Not Changed	Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	12	38	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	2	▲ 7	1
Titanium	ppm	ASTM D5185m		10	8	<1
Silver	ppm	ASTM D5185m	>3	2	2	4
Aluminum	ppm	ASTM D5185m	>20	4	10	7
Lead	ppm	ASTM D5185m	>40	0	0	6
Copper	ppm	ASTM D5185m	>330	91	● 228	381
Tin	ppm	ASTM D5185m	>15	0	1	2
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	<1




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	10	9	7
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	52	61	57
Manganese	ppm	ASTM D5185m	0	<1	2	1
Magnesium	ppm	ASTM D5185m	950	934	930	830
Calcium	ppm	ASTM D5185m	1050	1219	1263	1072
Phosphorus	ppm	ASTM D5185m	995	1059	997	906
Zinc	ppm	ASTM D5185m	1180	1294	1226	1023
Sulfur	ppm	ASTM D5185m	2600	3469	2767	2802

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	12	9
Sodium	ppm	ASTM D5185m		2	4	3
Potassium	ppm	ASTM D5185m	>20	6	21	16

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.0	10.7	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.0	21.5	19.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	18.7	16.2
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	5.5	6.7





OIL ANALYSIS REPORT

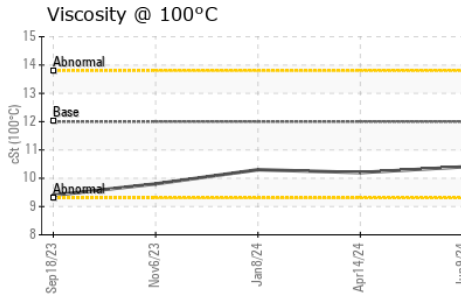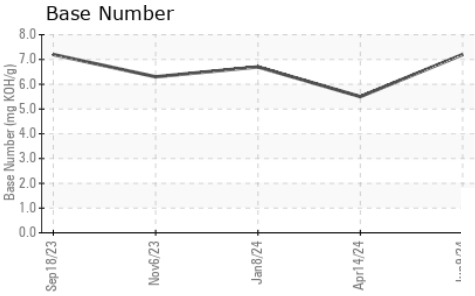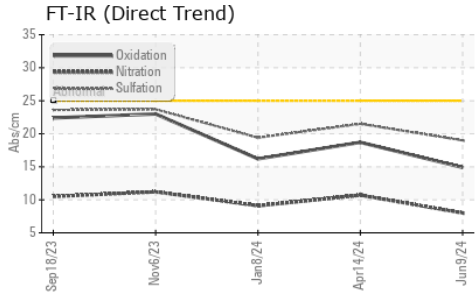

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.4	10.2

GRAPHS

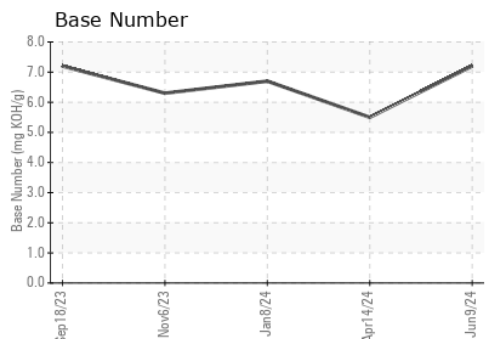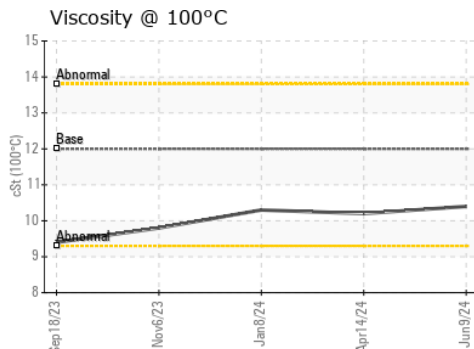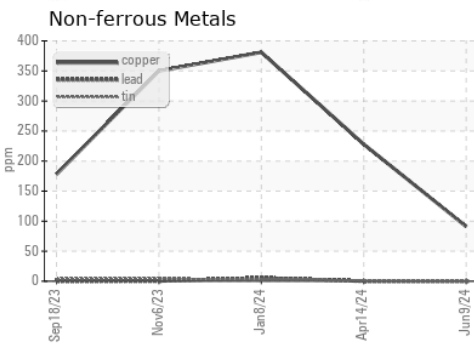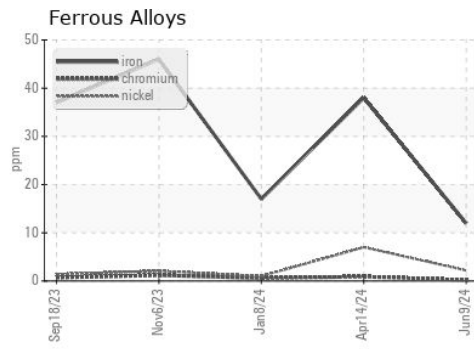

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113269
Lab Number : 06219428
Unique Number : 11097625
Test Package : FLEET
Received : 25 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)