


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

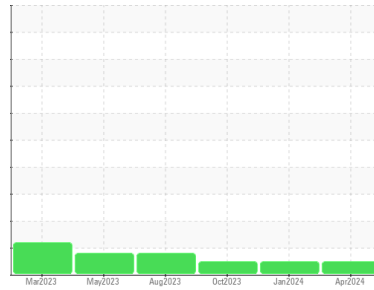

Machine Id
2126924
 Component
Transmission (Manual)
 Fluid
PETRO CANADA SYNGEAR E CD-50 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0121376 | PCA0117947 | PCA0106109 |
| Sample Date | Client Info | | | 22 Apr 2024 | 28 Jan 2024 | 04 Oct 2023 |
| Machine Age | mls | Client Info | | 122084 | 102284 | 81623 |
| Oil Age | mls | Client Info | | 122084 | 102284 | 0 |
| Oil Changed | Client Info | | | Not Chngd | Not Chngd | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.1 | NEG | NEG | NEG |


| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|-----------|----------|----------|
| Iron | ppm | ASTM D5185m | >200 | 25 | 31 | 37 |
| Chromium | ppm | ASTM D5185m | >5 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >7 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | 2 | 1 |
| Lead | ppm | ASTM D5185m | >45 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >225 | 50 | 52 | 52 |
| Tin | ppm | ASTM D5185m | >10 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | 16 | 16 | 19 |
| Magnesium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 898 | 849 | 914 |
| Phosphorus | ppm | ASTM D5185m | | 715 | 663 | 740 |
| Zinc | ppm | ASTM D5185m | | 3 | 0 | <1 |
| Sulfur | ppm | ASTM D5185m | | 5945 | 5062 | 4860 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >125 | 51 | 53 | 57 |
| Sodium | ppm | ASTM D5185m | | 3 | 2 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | 0 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | LIGHT |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |

OIL ANALYSIS REPORT

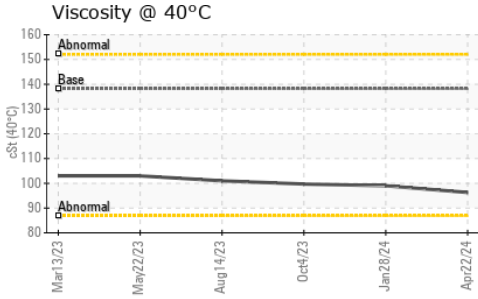




FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|-------------|---------------|---------|-------------|----------|
| Visc @ 40°C | cSt ASTM D445 | 138.2 | 96.3 | 99.0 |

SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|----------|----------|----------|
| Color | | no image | no image | no image |
| Bottom | | no image | no image | no image |

GRAPHS

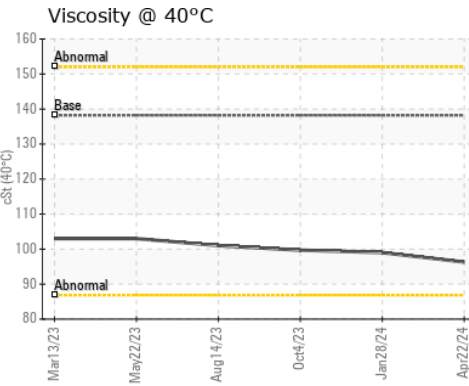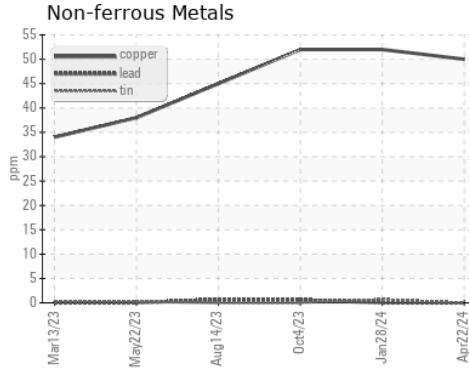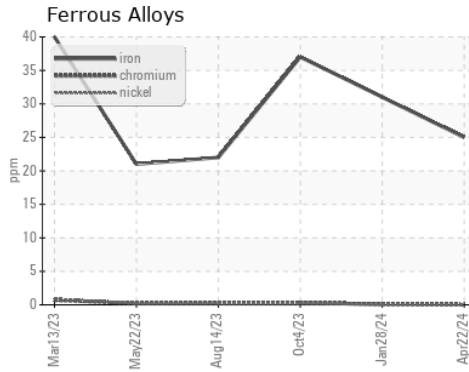

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0121376
Lab Number : **06220195**
Unique Number : 11098392
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: