


# OIL ANALYSIS REPORT

Sample Rating Trend



**VISUAL METAL**

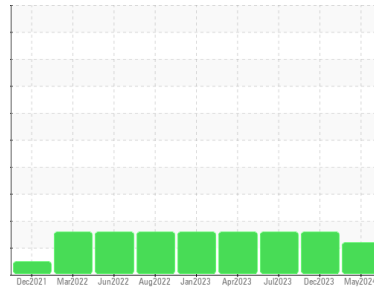

Machine Id  
**1926733**

Component  
**Transmission**

Fluid  
**PETRO CANADA SYNGEAR E CD-50 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Moderate concentration of visible metal present. All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0125023</b>	PCA0114118	PCA0102162
Sample Date	Client Info		<b>28 May 2024</b>	29 Dec 2023	26 Jul 2023
Machine Age	mls	Client Info	<b>343741</b>	307669	268913
Oil Age	mls	Client Info	<b>343741</b>	307669	268913
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>18</b>	26	29
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>81</b>	88	91
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>2</b>	1	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>6</b>	7	8
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Calcium	ppm	ASTM D5185m	<b>715</b>	735	783
Phosphorus	ppm	ASTM D5185m	<b>590</b>	585	621
Zinc	ppm	ASTM D5185m	<b>28</b>	14	31
Sulfur	ppm	ASTM D5185m	<b>3908</b>	3655	4043


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>49</b>	▲ 54	▲ 60
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	<1

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	▲ <b>MODER</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	LIGHT
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

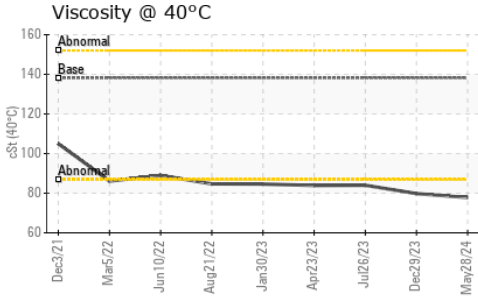




### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	138.2	<b>77.8</b>	79.8	84.0

### SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS

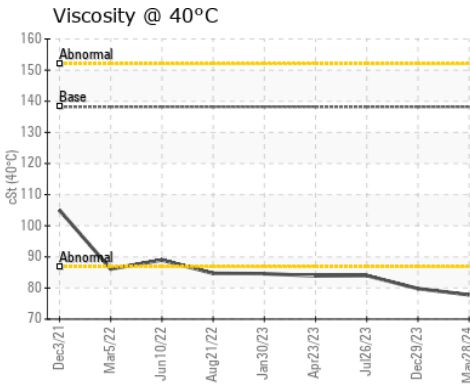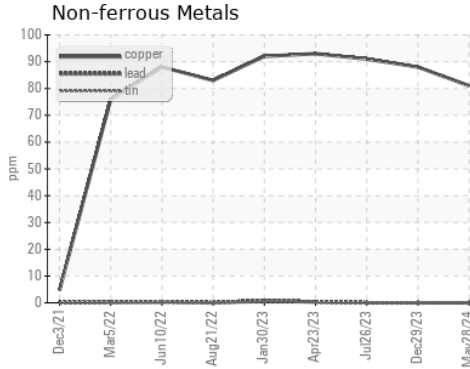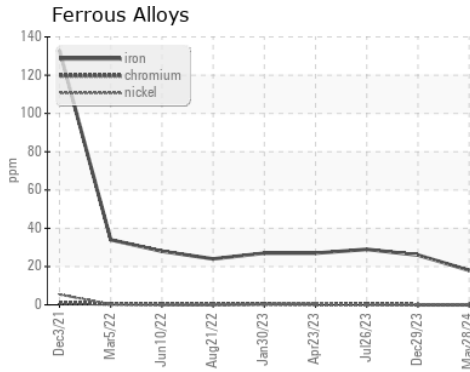

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0125023  
**Lab Number** : **06220218**  
**Unique Number** : 11098415  
**Test Package** : FLEET  
**Received** : 25 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Sean Felton

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: