




PROBLEM SUMMARY

Sample Rating Trend

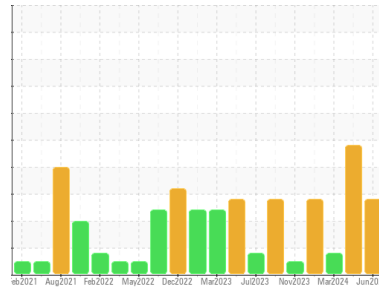

FUEL





Machine Id
827036-1040

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (22 QTS)

COMPONENT CONDITION SUMMARY

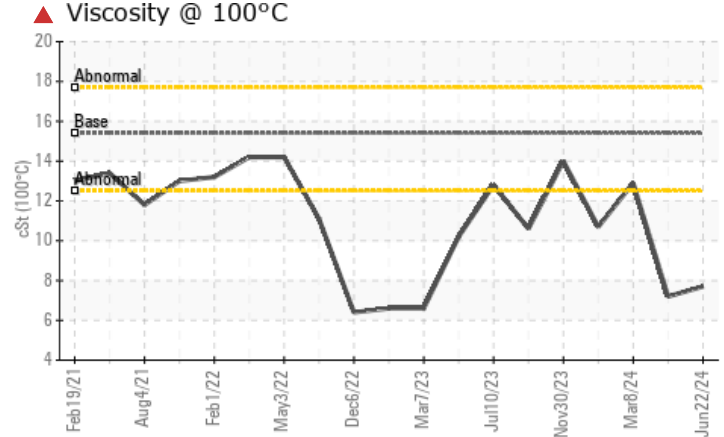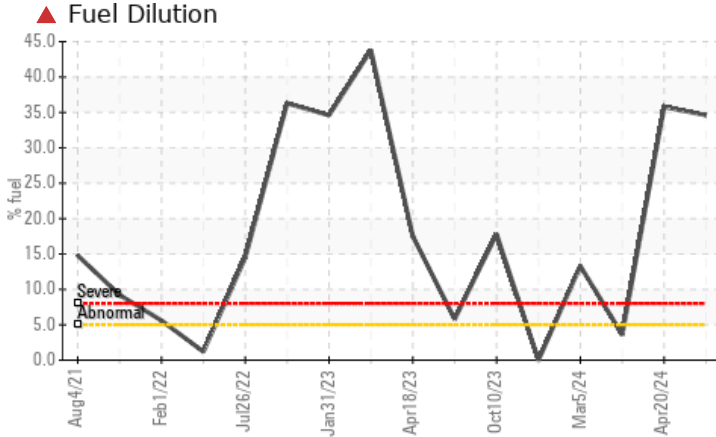

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	MARGINAL
Fuel	%	ASTM D3524	>5	▲ 34.6	▲ 35.8	▲ 3.6
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 7.7	▲ 7.2	12.9

Customer Id: GFL622
Sample No.: GFL0120899
Lab Number: 06220513
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

FUEL



20 Apr 2024 Diag: Sean Felton

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



FUEL



08 Mar 2024 Diag: Jonathan Hester

No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Light fuel dilution occurring. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



FUEL



05 Mar 2024 Diag: Jonathan Hester

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

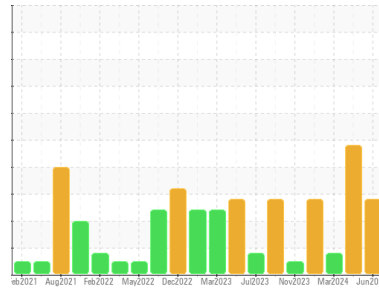

FUEL



Machine Id
827036-1040

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (22 QTS)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0120899	GFL0110312	GFL0110341
Sample Date	Client Info	22 Jun 2024	20 Apr 2024	08 Mar 2024
Machine Age	hrs	15233	14773	14227
Oil Age	hrs	580	590	370
Oil Changed	Client Info	Changed	Changed	Not Changed
Sample Status		SEVERE	SEVERE	MARGINAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	17	▲ 85	33
Chromium	ppm ASTM D5185m >5	<1	4	1
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	1	2	2
Lead	ppm ASTM D5185m >30	0	0	0
Copper	ppm ASTM D5185m >150	<1	3	<1
Tin	ppm ASTM D5185m >5	0	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	1	0
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	37	37	62
Manganese	ppm ASTM D5185m 0	<1	1	<1
Magnesium	ppm ASTM D5185m 1010	606	542	903
Calcium	ppm ASTM D5185m 1070	662	648	1078
Phosphorus	ppm ASTM D5185m 1150	662	572	1020
Zinc	ppm ASTM D5185m 1270	790	713	1220
Sulfur	ppm ASTM D5185m 2060	2208	1769	3055

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	4	14	3
Sodium	ppm ASTM D5185m	2	6	8
Potassium	ppm ASTM D5185m >20	2	0	<1
Fuel	% ASTM D3524 >5	▲ 34.6	▲ 35.8	▲ 3.6

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	1.2	0.7
Nitration	Abs/cm *ASTM D7624 >20	11.4	15.4	11.6
Sulfation	Abs/.1mm *ASTM D7415 >30	20.7	24.5	22.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	22.8	▲ 27.9	22.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	5.4	5.3	5.8







OIL ANALYSIS REPORT

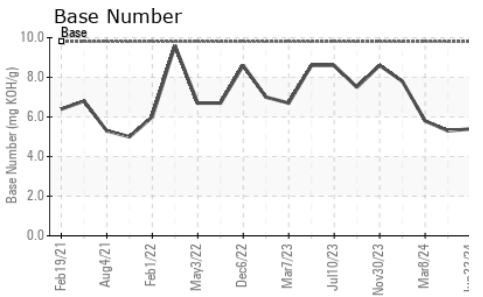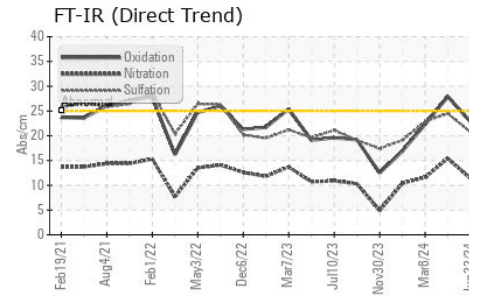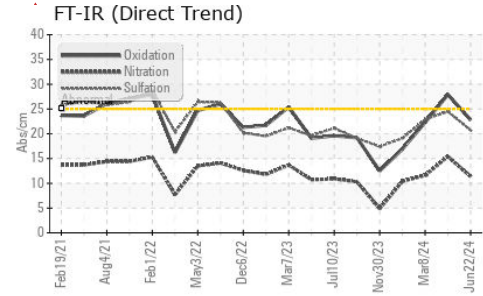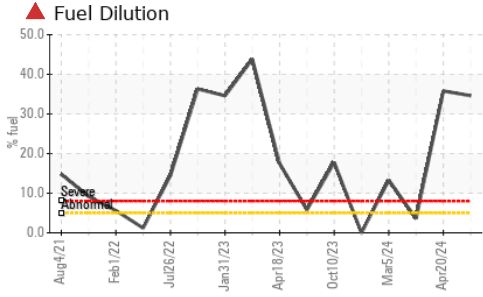

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 7.7	▲ 7.2

GRAPHS

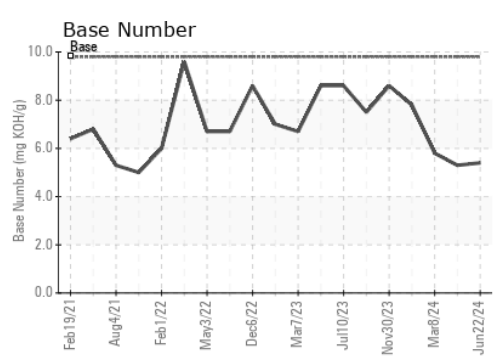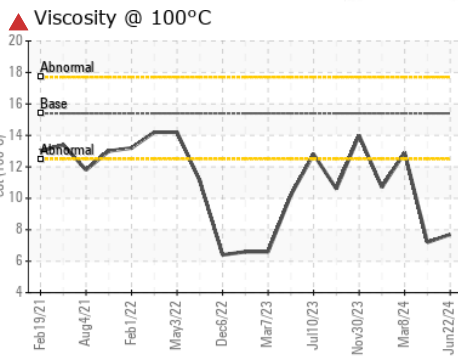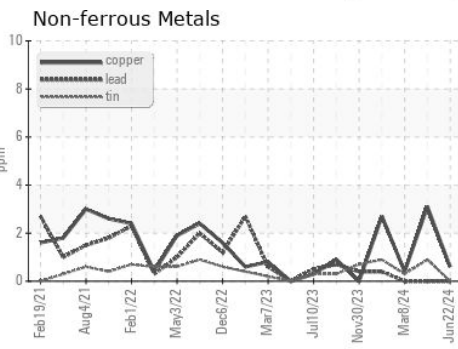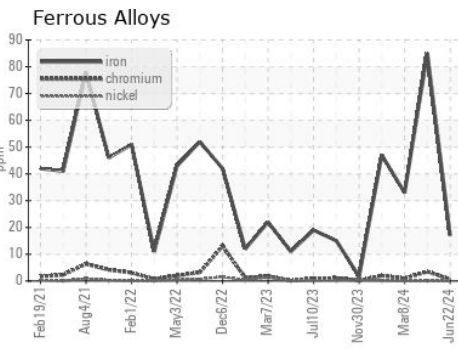

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0120899 **Received** : 25 Jun 2024
Lab Number : 06220513 **Tested** : 27 Jun 2024
Unique Number : 11098710 **Diagnosed** : 27 Jun 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 622 - Traverse City Hauling
 160 Hughes Dr
 Traverse City, MI
 US 49686
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: