


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

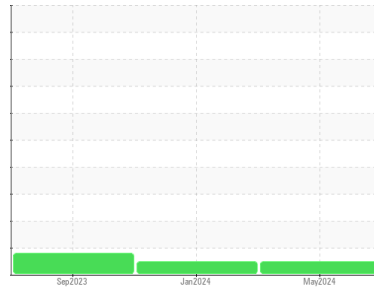

Machine Id
738679
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0124060	PCA0110153	PCA0099728
Sample Date	Client Info			16 May 2024	26 Jan 2024	08 Sep 2023
Machine Age	mls	Client Info		130755	109981	85950
Oil Age	mls	Client Info		25000	20000	20000
Oil Changed	Client Info			Not Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	73	52	▲ 107
Chromium	ppm	ASTM D5185m	>20	3	3	6
Nickel	ppm	ASTM D5185m	>4	<1	0	2
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	27	24	74
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	47	46	167
Tin	ppm	ASTM D5185m	>15	2	2	7
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	19	15	23
Barium	ppm	ASTM D5185m	0	0	0	<1
Molybdenum	ppm	ASTM D5185m	50	68	71	41
Manganese	ppm	ASTM D5185m	0	2	2	4
Magnesium	ppm	ASTM D5185m	950	802	813	499
Calcium	ppm	ASTM D5185m	1050	1479	1459	1860
Phosphorus	ppm	ASTM D5185m	995	980	1018	773
Zinc	ppm	ASTM D5185m	1180	1237	1246	967
Sulfur	ppm	ASTM D5185m	2600	2630	2774	1772

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	8	11
Sodium	ppm	ASTM D5185m		3	3	8
Potassium	ppm	ASTM D5185m	>20	65	58	190

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.5	1	2.1
Nitration	Abs/cm	*ASTM D7624	>20	13.4	10.9	18.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.8	22.3	30.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.9	20.1	37.4
Base Number (BN)	mg KOH/g	ASTM D2896		5.8	6.6	4.3









OIL ANALYSIS REPORT

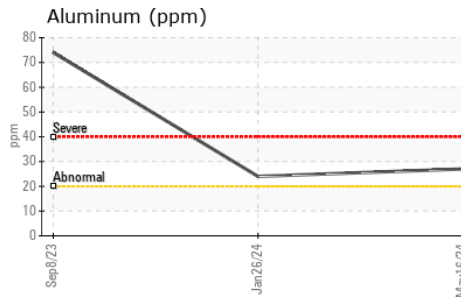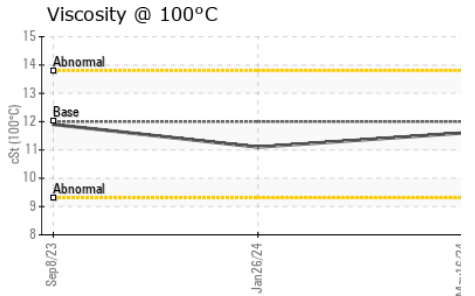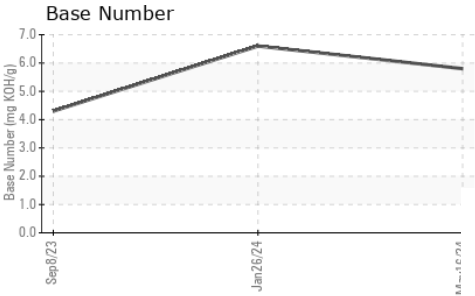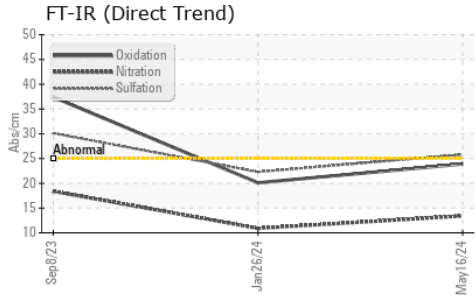

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 12.00	11.6	11.1	11.9

GRAPHS

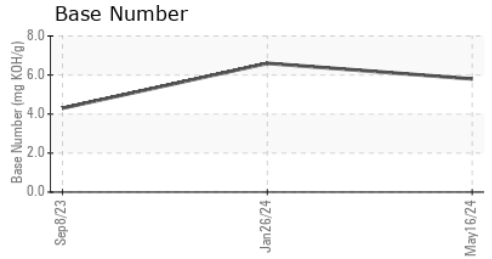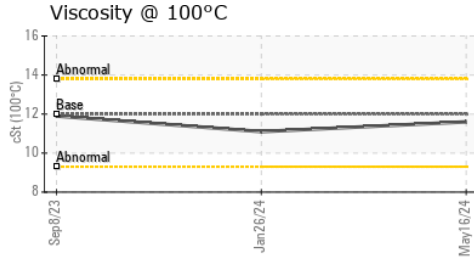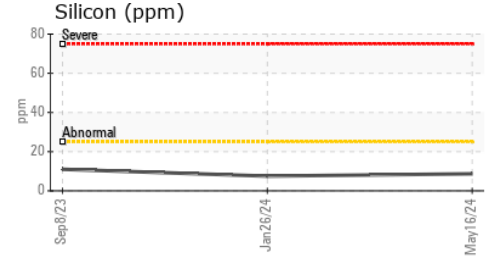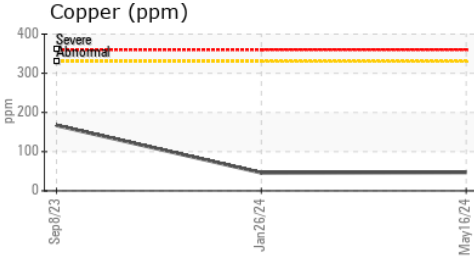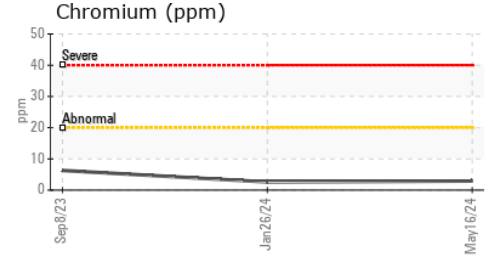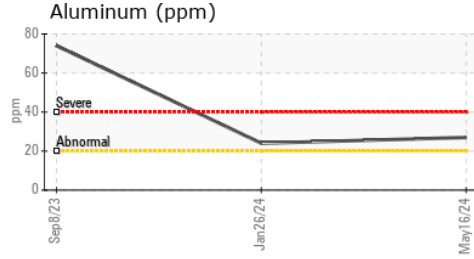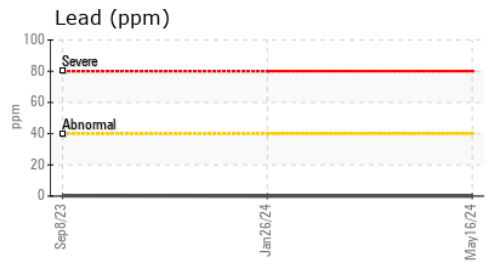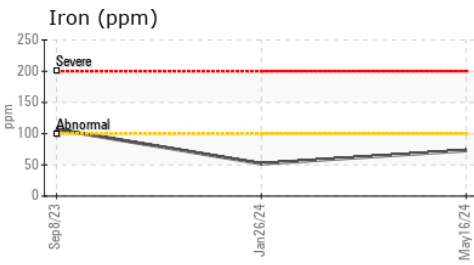

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0124060 **Received** : 26 Jun 2024
Lab Number : 06220701 **Tested** : 27 Jun 2024
Unique Number : 11098898 **Diagnosed** : 27 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #121
 107 HOW LANE
 NEW BRUNSWICK, NJ
 US 08901
 Contact: Anthony Cursi
 acursi@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)