

OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id
2327215
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- QTS)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

● Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA06220725	---	---
Sample Date	Client Info		25 Jun 2024	---	---
Machine Age	mls	Client Info	24327	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	65	---	---
Chromium	ppm	ASTM D5185m >20	3	---	---
Nickel	ppm	ASTM D5185m >4	6	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >3	1	---	---
Aluminum	ppm	ASTM D5185m >20	64	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	▲ 479	---	---
Tin	ppm	ASTM D5185m >15	37	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	39	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 60	43	---	---
Manganese	ppm	ASTM D5185m 0	6	---	---
Magnesium	ppm	ASTM D5185m 1010	527	---	---
Calcium	ppm	ASTM D5185m 1070	1735	---	---
Phosphorus	ppm	ASTM D5185m 1150	724	---	---
Zinc	ppm	ASTM D5185m 1270	931	---	---
Sulfur	ppm	ASTM D5185m 2060	2008	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	---	---
Sodium	ppm	ASTM D5185m	7	---	---
Potassium	ppm	ASTM D5185m >20	188	---	---
Fuel	%	ASTM D3524 >5	0.0	---	---






INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624 >20	8.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.6	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	5.2	---	---





OIL ANALYSIS REPORT

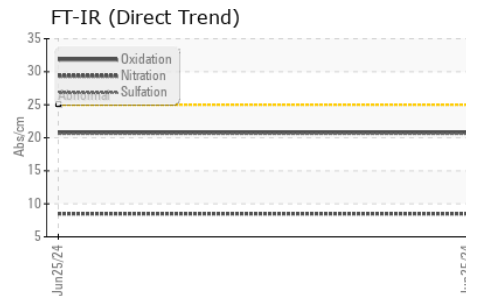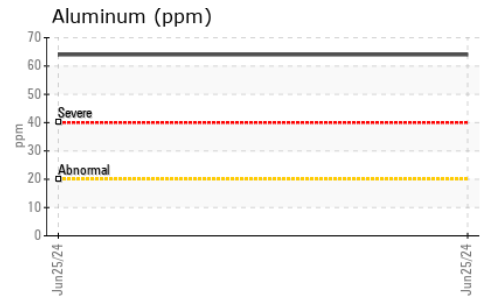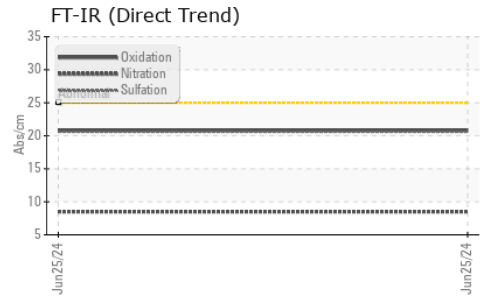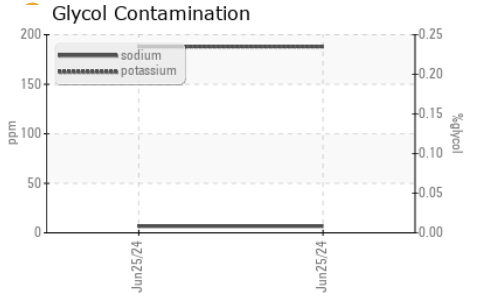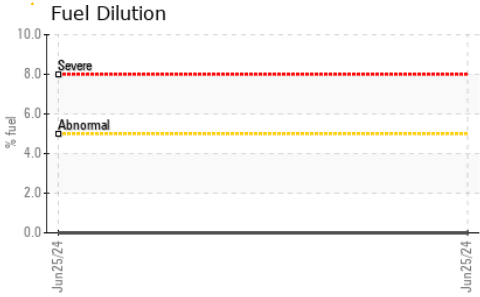

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15.4	9.7	---	---

GRAPHS

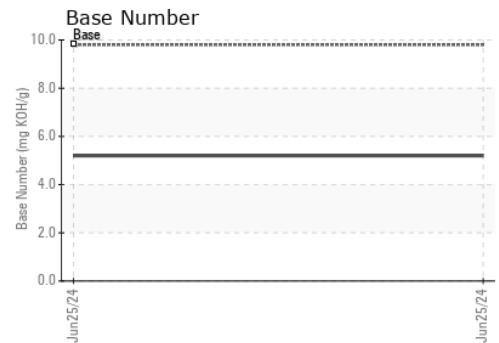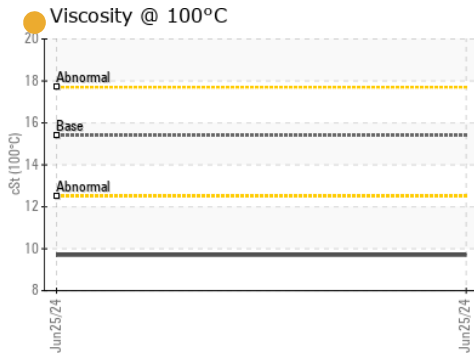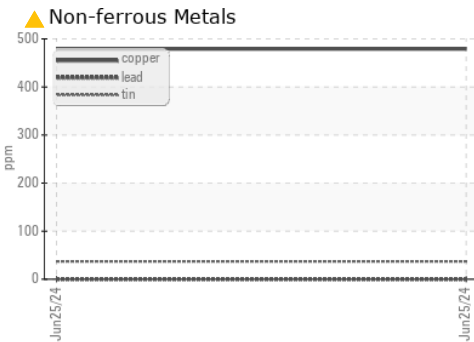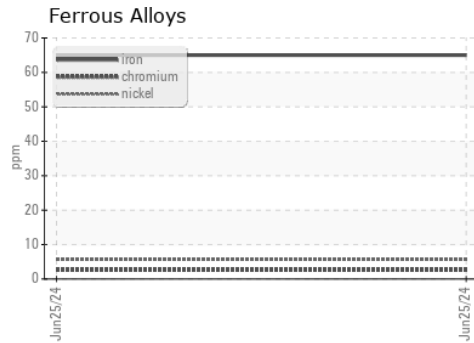

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA06220725 **Received** : 26 Jun 2024
Lab Number : **06220725** **Tested** : 29 Jun 2024
Unique Number : 11098922 **Diagnosed** : 29 Jun 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

PERDUE FARMS - SALISBURY
 7036 ZION CHURCH ROAD
 SALISBURY, MD
 US 21802
 Contact: RICHARD O'NEAL
 richard.oneal@perdue.com
 T: (410)543-3628
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)