


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

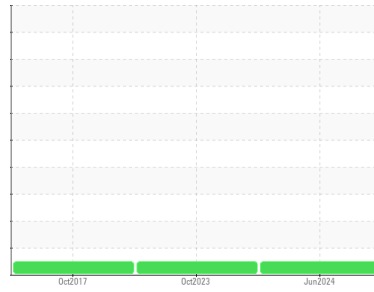

Machine Id
VOLVO 26513 (S/N 4V4NC9EH2HN991818)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0123184	PCA0101136	PCAMF019885
Sample Date	Client Info		23 Jun 2024	10 Oct 2023	05 Oct 2017
Machine Age	mls	Client Info	0	541060	39831
Oil Age	mls	Client Info	24000	40000	40000
Oil Changed	Client Info		Changed	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	0.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	30	48	31
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m	21	0	2
Silver	ppm	ASTM D5185m >2	0	<1	<1
Aluminum	ppm	ASTM D5185m >25	3	5	21
Lead	ppm	ASTM D5185m >40	<1	2	<1
Copper	ppm	ASTM D5185m >330	7	7	206
Tin	ppm	ASTM D5185m >15	0	1	8
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	10	4	14
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	46	57	43
Manganese	ppm	ASTM D5185m 0	0	1	1
Magnesium	ppm	ASTM D5185m 950	804	898	567
Calcium	ppm	ASTM D5185m 1050	1235	1035	1573
Phosphorus	ppm	ASTM D5185m 995	986	1040	713
Zinc	ppm	ASTM D5185m 1180	1281	1217	943
Sulfur	ppm	ASTM D5185m 2600	3047	2530	2156

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	7	9
Sodium	ppm	ASTM D5185m	10	17	8
Potassium	ppm	ASTM D5185m >20	6	6	59




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	9.7	11.8	9.
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.7	22.5	21.

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.7	19.5	18.
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	5.9	6.85





OIL ANALYSIS REPORT

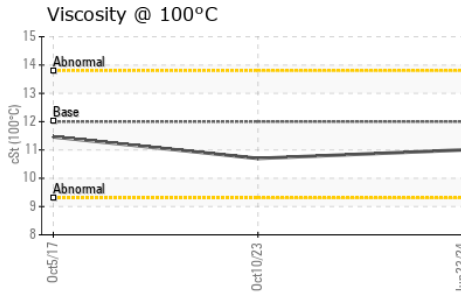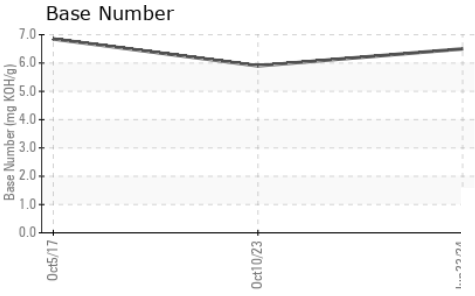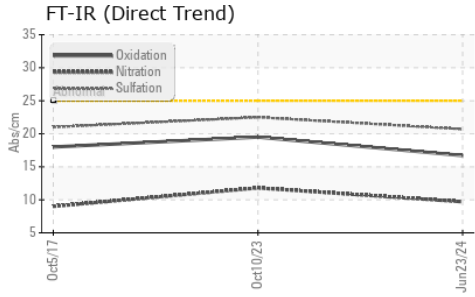

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.0	10.7	11.46

GRAPHS

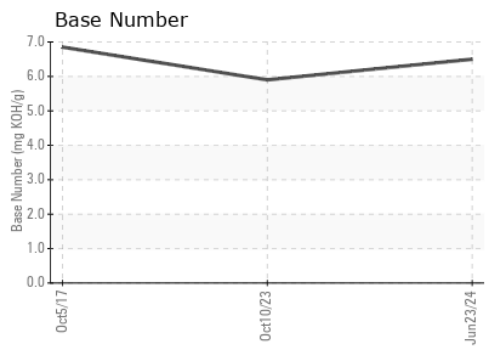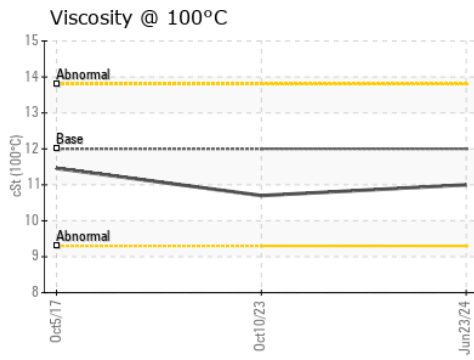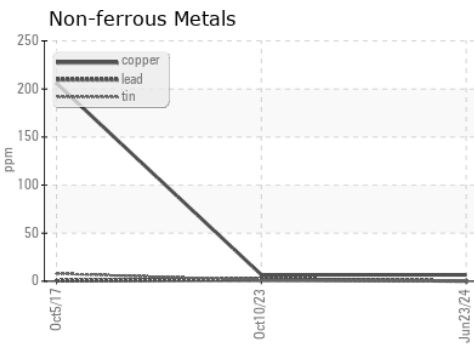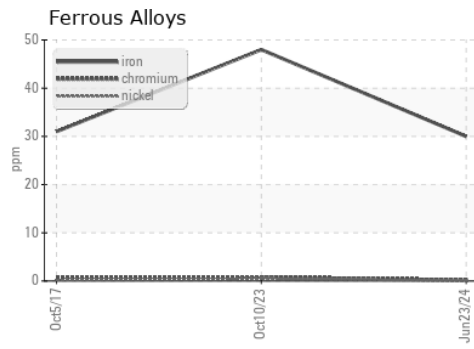

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123184 **Received** : 26 Jun 2024
Lab Number : **06220729** **Tested** : 27 Jun 2024
Unique Number : 11098926 **Diagnosed** : 27 Jun 2024 - Wes Davis
Test Package : FLEET

PERDUE FARMS - SALISBURY
 7036 ZION CHURCH ROAD
 SALISBURY, MD
 US 21802
 Contact: RICHARD O'NEAL
 richard.oneal@perdue.com
 T: (410)543-3628
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)