




OIL ANALYSIS REPORT

Sample Rating Trend

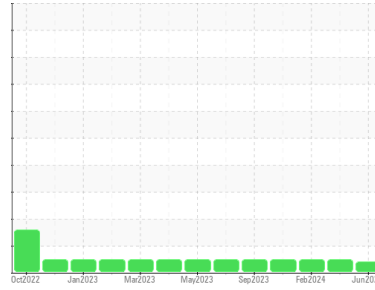

VIS DEBRIS



Machine Id

733004

Component

Natural Gas Engine

Fluid

PETRO CANADA DURON SHP 15W40 (28 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0121898	GFL0106741	GFL0092121
Sample Date	Client Info	20 Jun 2024	18 Apr 2024	05 Feb 2024
Machine Age	hrs	5456	4899	4235
Oil Age	hrs	600	111181	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	7	8	6
Chromium	ppm ASTM D5185m >4	<1	2	<1
Nickel	ppm ASTM D5185m >2	0	1	0
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >3	0	<1	0
Aluminum	ppm ASTM D5185m >9	2	2	1
Lead	ppm ASTM D5185m >30	0	2	0
Copper	ppm ASTM D5185m >35	1	2	0
Tin	ppm ASTM D5185m >4	0	2	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	15	10	18
Barium	ppm ASTM D5185m 0	0	<1	0
Molybdenum	ppm ASTM D5185m 60	51	58	53
Manganese	ppm ASTM D5185m 0	<1	1	<1
Magnesium	ppm ASTM D5185m 1010	591	535	559
Calcium	ppm ASTM D5185m 1070	1648	1657	1561
Phosphorus	ppm ASTM D5185m 1150	777	643	743
Zinc	ppm ASTM D5185m 1270	957	930	977
Sulfur	ppm ASTM D5185m 2060	2960	2451	2375

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	5	5	3
Sodium	ppm ASTM D5185m	6	6	6
Potassium	ppm ASTM D5185m >20	2	2	0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0	0
Nitration	Abs/cm *ASTM D7624 >20	10.2	10.9	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	21.4	21.3	21.3


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.2	18.5	18.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.1	4.8	5.3




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

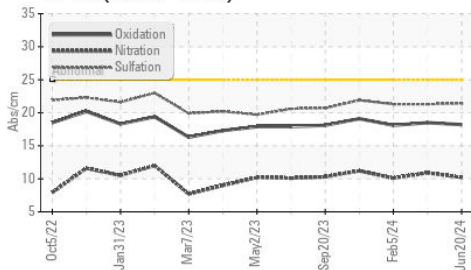


Viscosity @ 40°C

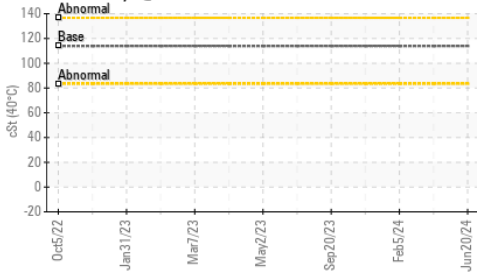


Viscosity @ 100°C

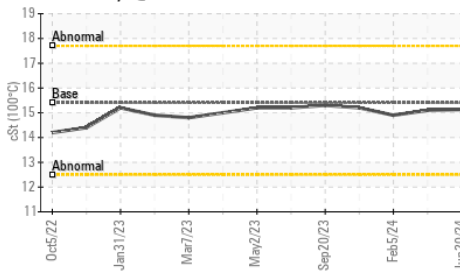

Viscosity @ 40°C

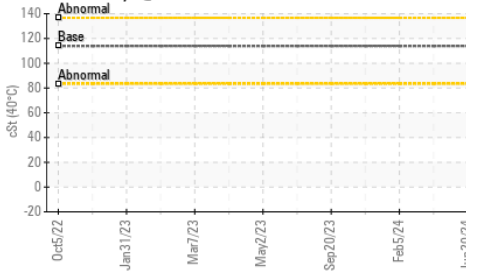

Viscosity @ 100°C

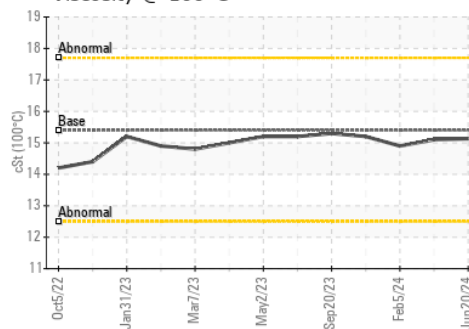


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	15.13	15.1	14.9

GRAPHS


Ferrous Alloys

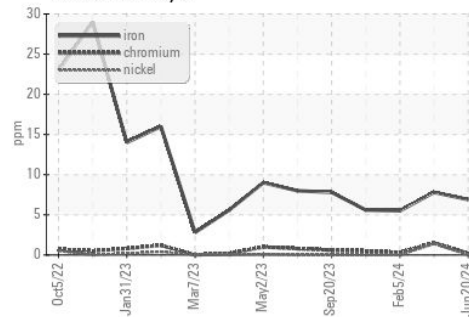

Non-ferrous Metals

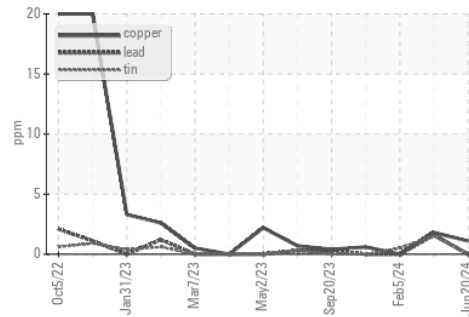

Base Number

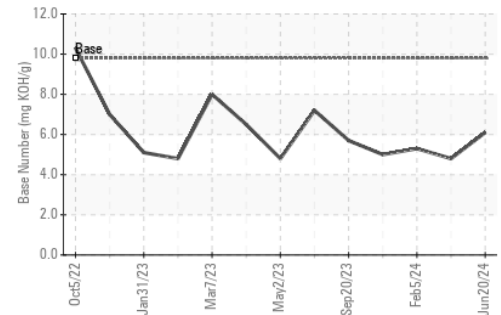

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0121898

Lab Number : 06221713

Unique Number : 11099910

Test Package : FLEET (Additional Tests: KV40)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 26 Jun 2024

Tested : 01 Jul 2024

Diagnosed : 01 Jul 2024 - Jonathan Hester

GFL Environmental - 856 - Houston South

8515 Highway 6 South

Houston, TX

US 77083

Contact: Apolinar Zacarias

pzacariascano@gflenv.com

T:

F: