


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

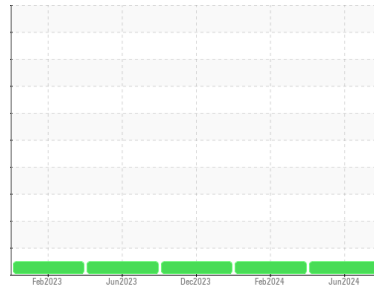

Machine Id
621333
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-----------------|--------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0125238 | PCA0114593 | PCA0112269 |
| Sample Date | Client Info | | | 04 Jun 2024 | 05 Feb 2024 | 11 Dec 2023 |
| Machine Age | mls Client Info | | | 19546 | 19498 | 19009 |
| Oil Age | mls Client Info | | | 19546 | 19498 | 0 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >100 | 4 | 4 | 16 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | 0 | 1 |
| Titanium | ppm | ASTM D5185m | | 20 | 11 | 2 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 2 | 4 |
| Lead | ppm | ASTM D5185m | >40 | <1 | 0 | 1 |
| Copper | ppm | ASTM D5185m | >330 | 41 | 65 | 427 |
| Tin | ppm | ASTM D5185m | >15 | <1 | 0 | 2 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | <1 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 2 | 46 | 29 | 6 |
| Barium | ppm | ASTM D5185m | 0 | 0 | <1 | 12 |
| Molybdenum | ppm | ASTM D5185m | 50 | 43 | 46 | 58 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 950 | 801 | 760 | 886 |
| Calcium | ppm | ASTM D5185m | 1050 | 1245 | 1049 | 1091 |
| Phosphorus | ppm | ASTM D5185m | 995 | 1060 | 915 | 957 |
| Zinc | ppm | ASTM D5185m | 1180 | 1248 | 1064 | 1180 |
| Sulfur | ppm | ASTM D5185m | 2600 | 3778 | 3210 | 3157 |


| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 5 | 6 | 6 |
| Sodium | ppm | ASTM D5185m | | 5 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 4 | 16 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.1 | 0.1 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 4.9 | 5.0 | 8.8 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.4 | 17.1 | 18.9 |


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 12.6 | 12.5 | 15.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 9.5 | 9.3 | 6.5 |

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

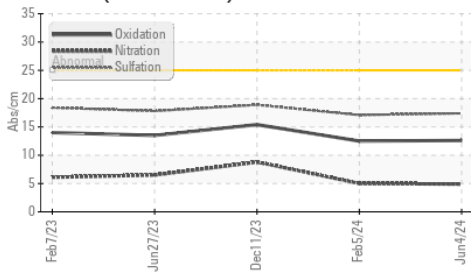

Base Number

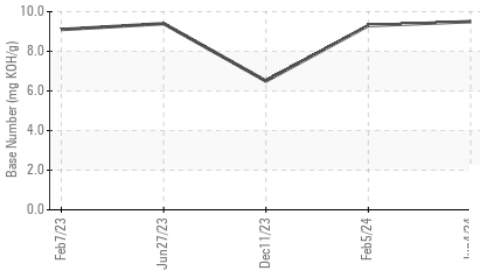


Viscosity @ 100°C

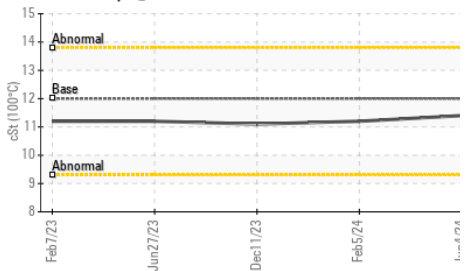

| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.4 | 11.2 |

GRAPHS

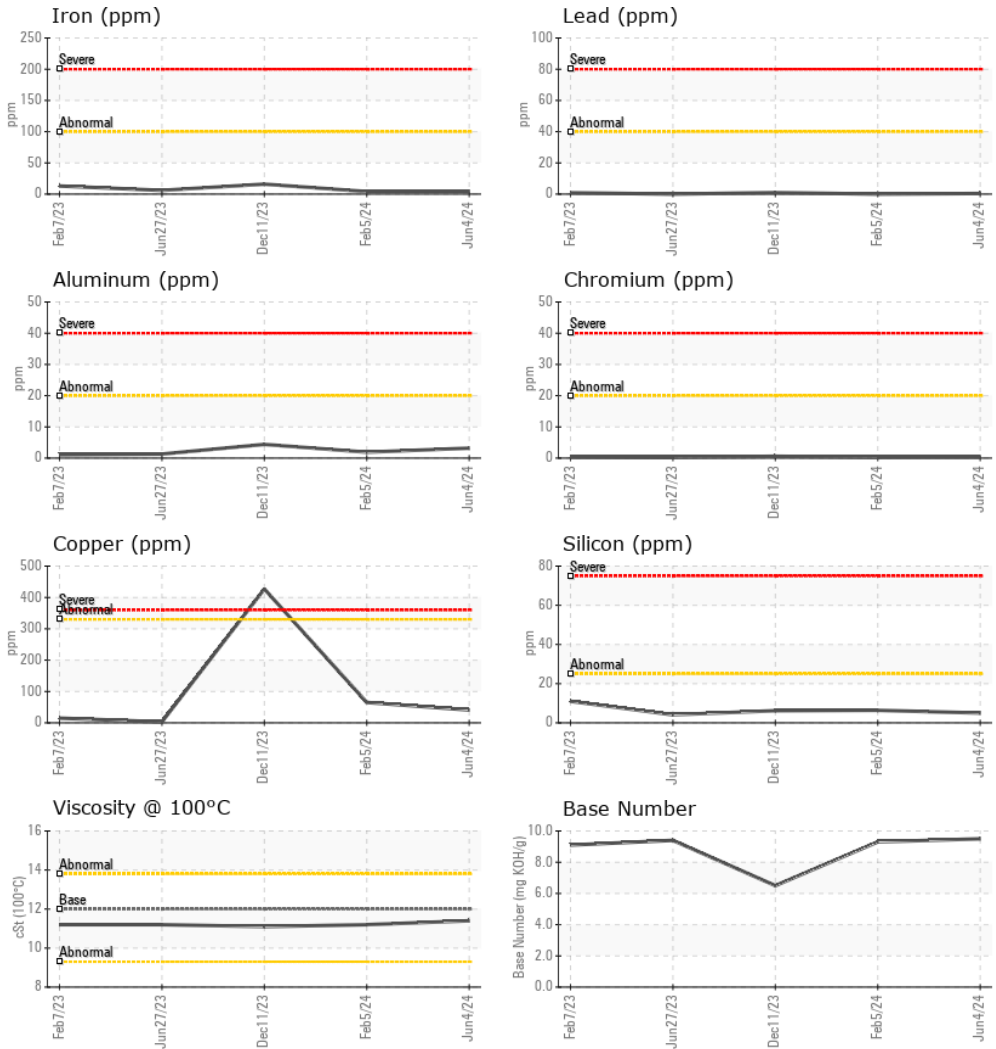

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0125238
Lab Number : 06222054
Unique Number : 11100251
Test Package : MOB 1 (Additional Tests: TBN)

Received : 27 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 27 Jun 2024 - Wes Davis

MILLER TRUCK LEASING #118
 2196 BENNETT ROAD
 PHILADELPHIA, PA
 US 19116
 Contact: ROSTY VITER
 rviter@millertransgroup.com
 T: (215)552-9832
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)