


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

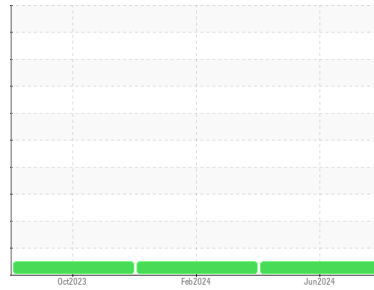

Machine Id  
**2126941**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0120170</b>	PCA0111480	PCA0107909
Sample Date	Client Info			<b>24 Jun 2024</b>	12 Feb 2024	18 Oct 2023
Machine Age	mls	Client Info		<b>155072</b>	103058	64587
Oil Age	mls	Client Info		<b>40162</b>	37049	64587
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>49</b>	35	48
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	5	18
Lead	ppm	ASTM D5185m	>40	<b>2</b>	3	4
Copper	ppm	ASTM D5185m	>330	<b>15</b>	51	191
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	4
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>2</b>	13	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	50	<b>50</b>	66	81
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m	950	<b>793</b>	1010	1040
Calcium	ppm	ASTM D5185m	1050	<b>912</b>	1133	1367
Phosphorus	ppm	ASTM D5185m	995	<b>665</b>	959	992
Zinc	ppm	ASTM D5185m	1180	<b>1016</b>	1276	1336
Sulfur	ppm	ASTM D5185m	2600	<b>2108</b>	2504	3055

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	7	12
Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	12	48

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>16.0</b>	12.2	11.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>27.3</b>	23.9	23.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>29.5</b>	22.0	20.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>3.1</b>	4.3	4.7





# OIL ANALYSIS REPORT

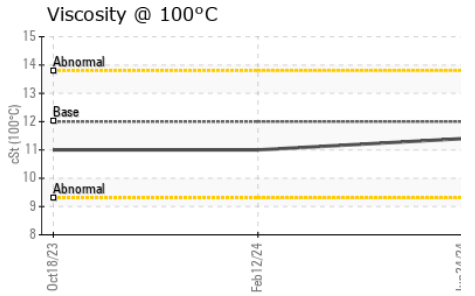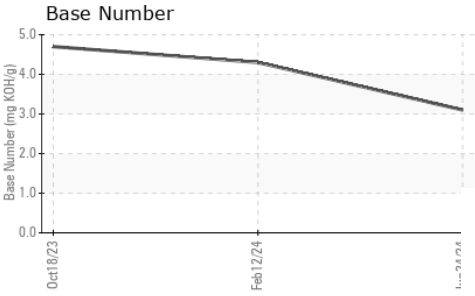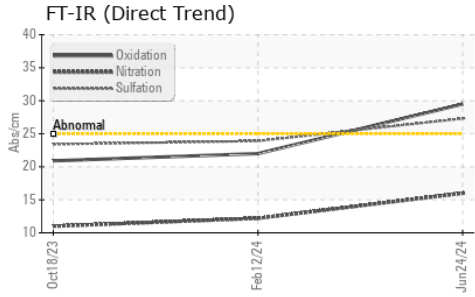

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.0

## GRAPHS

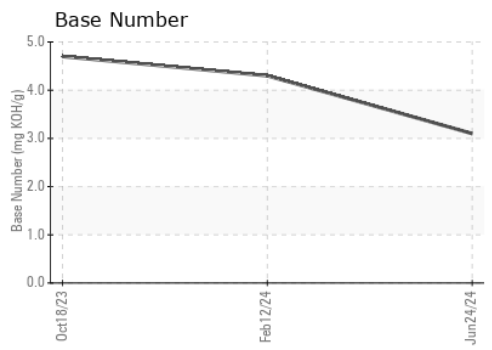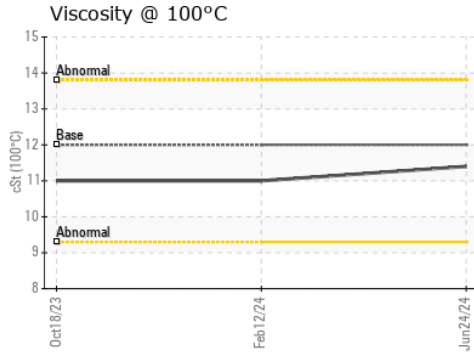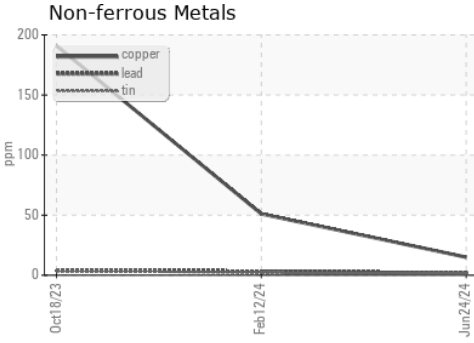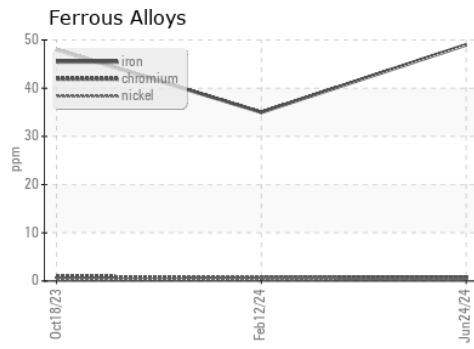

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0120170  
**Lab Number** : 06222075  
**Unique Number** : 11100272  
**Test Package** : FLEET

**Received** : 27 Jun 2024  
**Tested** : 28 Jun 2024  
**Diagnosed** : 28 Jun 2024 - Don Baldrige

**PERDUE FARMS - Lewiston**  
 210 GRIFFINS QUARTER RD  
 LEWISTON, NC  
 US 27849  
 Contact: NELSON WALLACE  
 nelson.wallace2@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)