




OIL ANALYSIS REPORT

Sample Rating Trend

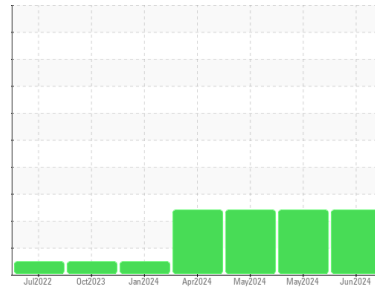

Area
(41429UA)
 Machine Id
829095
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0122005	GFL0122064	GFL0111908
Sample Date	Client Info	25 Jun 2024	27 May 2024	03 May 2024
Machine Age	hrs	9195	9062	8976
Oil Age	hrs	8968	8921	8901
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	78	57	43
Chromium	ppm ASTM D5185m >20	3	2	2
Nickel	ppm ASTM D5185m >4	1	<1	<1
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	11	9	8
Lead	ppm ASTM D5185m >40	<1	<1	0
Copper	ppm ASTM D5185m >330	3	1	2
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	8	8
Barium	ppm ASTM D5185m 0	<1	0	0
Molybdenum	ppm ASTM D5185m 60	58	56	58
Manganese	ppm ASTM D5185m 0	2	1	<1
Magnesium	ppm ASTM D5185m 1010	896	875	870
Calcium	ppm ASTM D5185m 1070	1078	1048	1060
Phosphorus	ppm ASTM D5185m 1150	1006	1008	1005
Zinc	ppm ASTM D5185m 1270	1225	1182	1161
Sulfur	ppm ASTM D5185m 2060	3065	3345	2982

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	36	38	36
Sodium	ppm ASTM D5185m	13	7	5
Potassium	ppm ASTM D5185m >20	30	18	12

INFRA-RED






method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.2	0.8	0.5
Nitration	Abs/cm *ASTM D7624 >20	12.4	9.3	7.9
Sulfation	Abs/.1mm *ASTM D7415 >30	24.9	20.3	19.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.2	15.9	14.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	5.6	7.9	8.2







OIL ANALYSIS REPORT

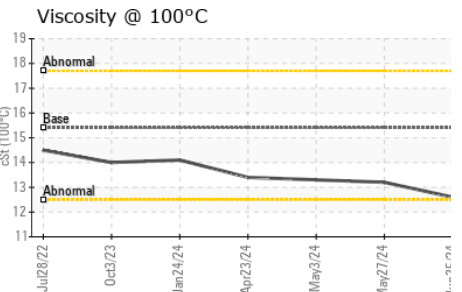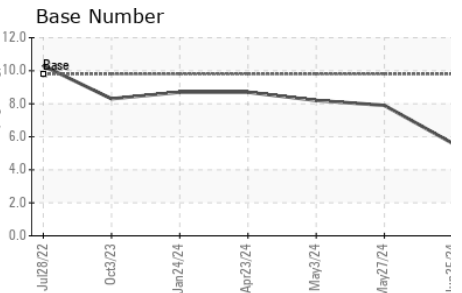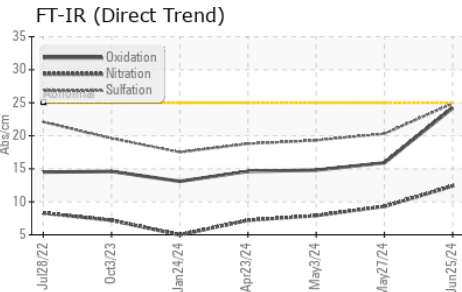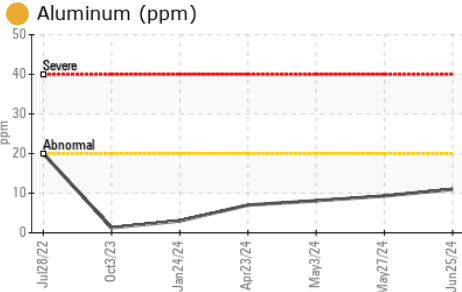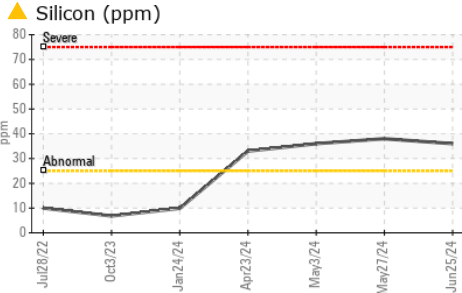

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.6	13.2

GRAPHS

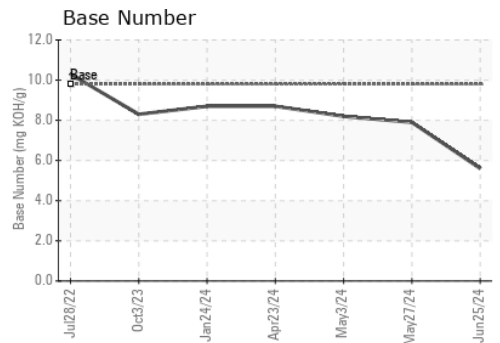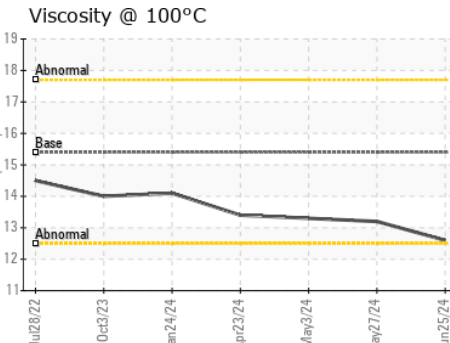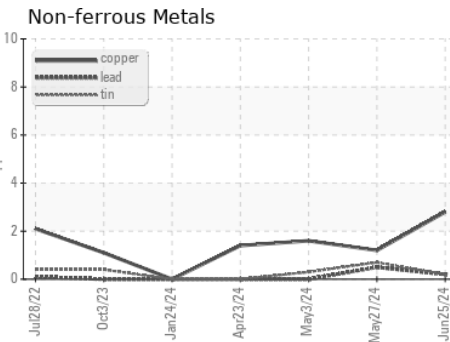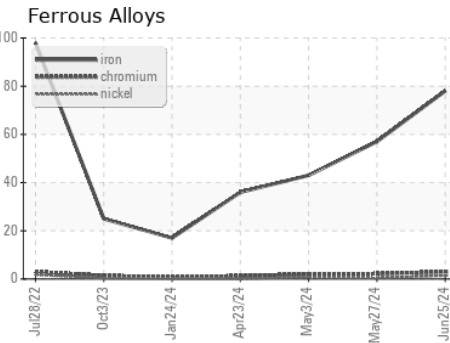

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0122005
 Lab Number : 06222165
 Unique Number : 11100362
 Test Package : FLEET

Received : 27 Jun 2024
 Tested : 28 Jun 2024
 Diagnosed : 29 Jun 2024 - Don Baldrige

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)