


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

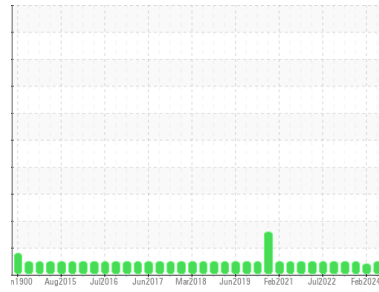

Machine Id  
**PREVOST MOTOR COACH 112**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0125067</b>	PCA0111565	PCA0101049	
Sample Date	Client Info	<b>06 Jun 2024</b>	21 Feb 2024	22 Nov 2023	
Machine Age	mls	Client Info	<b>451827</b>	440848	439121
Oil Age	mls	Client Info	<b>10979</b>	300	11433
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	ATTENTION	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	0.4	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>15</b>	6	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >4	<b>7</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	3	3
Lead	ppm ASTM D5185m >40	<b>2</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>3</b>	1	2
Tin	ppm ASTM D5185m >15	<b>1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>24</b>	73	0
Barium	ppm ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	48	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>773</b>	416	1021
Calcium	ppm ASTM D5185m 1070	<b>1193</b>	1736	1085
Phosphorus	ppm ASTM D5185m 1150	<b>963</b>	952	980
Zinc	ppm ASTM D5185m 1270	<b>1149</b>	1172	1336
Sulfur	ppm ASTM D5185m 2060	<b>3254</b>	3742	3138

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>10</b>	11	3
Sodium	ppm ASTM D5185m	<b>6</b>	3	13
Potassium	ppm ASTM D5185m >20	<b>3</b>	3	<1

### INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.1	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>6.8</b>	4.6	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.0</b>	17.3	18.8

### FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.4</b>	12.5	14.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>10.44</b>	9.70	10.09

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

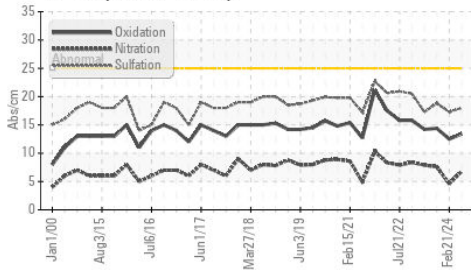


Acid Number

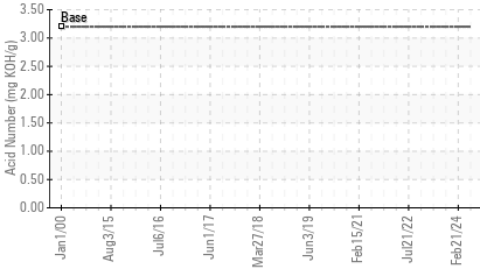

Viscosity @ 100°C

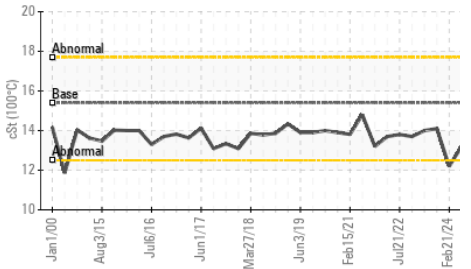

Acid Number

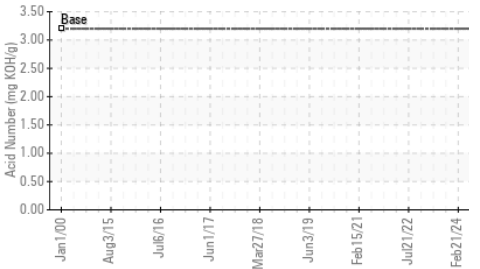


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	12.2

## GRAPHS


Iron (ppm)

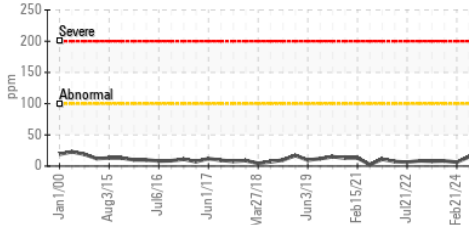


Lead (ppm)

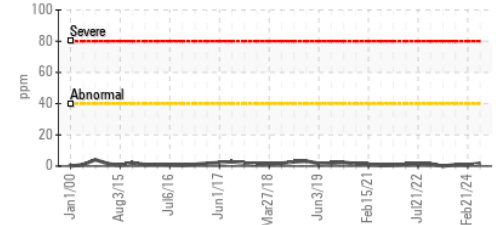


Aluminum (ppm)

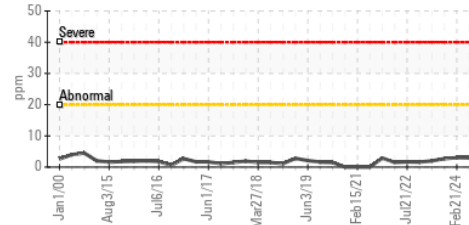


Chromium (ppm)

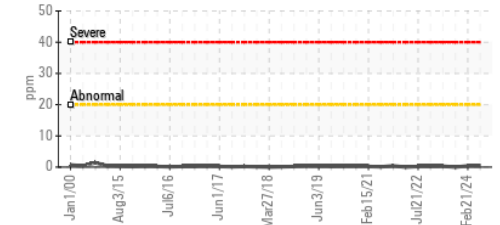


Copper (ppm)

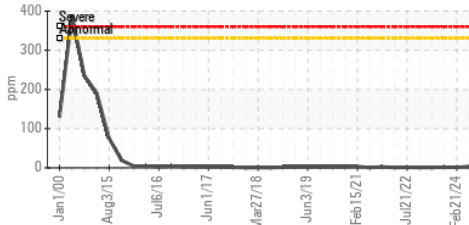


Silicon (ppm)

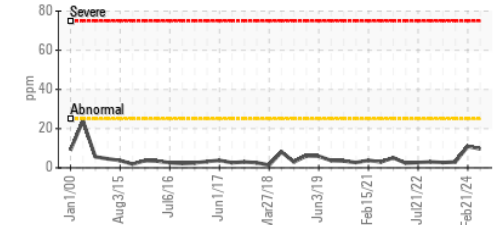

Viscosity @ 100°C

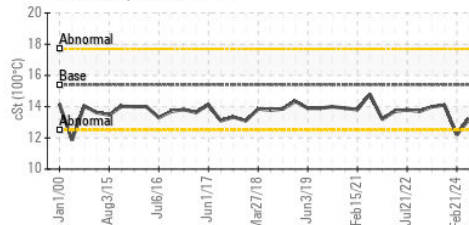

Base Number

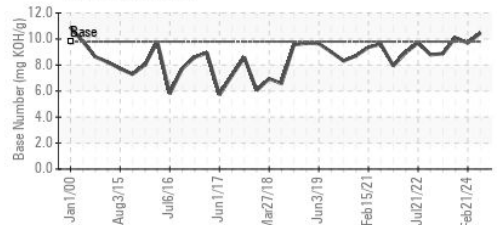

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : PCA0125067

Lab Number : 06222495

Unique Number : 11100692

Test Package : MOB 2 ( Additional Tests: TAN Man )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 27 Jun 2024

Tested : 28 Jun 2024

Diagnosed : 28 Jun 2024 - Angela Borella

BROWN BUS COMPANY - UPSTATE TRANSIT

50 VENNER ROAD

AMSTERDAM, NY

US 12010

Contact: CONNIE WILBUR

cwilbur@browncoach.com

T: (518)843-4700

F: (518)843-3600