

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id

721033-310086

Component Diesel Engine

Fluid PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0122942	GFL0122958	GFL0115441
Sample Date		Client Info		27 Jun 2024	11 Jun 2024	19 May 2024
Machine Age	hrs	Client Info		9122	8981	8839
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	8	8	5
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	5	3	2
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	2	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 26	history1 36	history2 59
	ppm ppm					
Boron		ASTM D5185m	0	26	36	59
Boron Barium	ppm	ASTM D5185m ASTM D5185m	0	26 0	36 0	59 0
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	26 0 81	36 0 82	59 0 81
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	26 0 81 <1	36 0 82 0	59 0 81 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	26 0 81 <1 997	36 0 82 0 877	59 0 81 <1 956
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	26 0 81 <1 997 1206	36 0 82 0 877 1097	59 0 81 <1 956 1127
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	26 0 81 <1 997 1206 1052	36 0 82 0 877 1097 921	59 0 81 <1 956 1127 1045
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	26 0 81 <1 997 1206 1052 1328	36 0 82 0 877 1097 921 1135	59 0 81 <1 956 1127 1045 1227
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060	26 0 81 <1 997 1206 1052 1328 3745	36 0 82 0 877 1097 921 1135 2920	59 0 81 <1 956 1127 1045 1227 3625
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	26 0 81 <1 997 1206 1052 1328 3745 current	36 0 82 0 877 1097 921 1135 2920 history1	59 0 81 <1 956 1127 1045 1227 3625 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	0 0 60 1010 1070 1150 1270 2060	26 0 81 <1 997 1206 1052 1328 3745 current 7	36 0 82 0 877 1097 921 1135 2920 history1 6	59 0 81 <1 956 1127 1045 1227 3625 history2 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 Limit/base >25	26 0 81 <1 997 1206 1052 1328 3745 Current 7 7	36 0 82 0 877 1097 921 1135 2920 history1 6 4	59 0 81 <1 956 1127 1045 1227 3625 history2 4 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20	26 0 81 <1 997 1206 1052 1328 3745 current 7 7 7	36 0 82 0 877 1097 921 1135 2920 history1 6 4 9	59 0 81 <1 956 1127 1045 1227 3625 history2 4 4 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 225 >25	26 0 81 <1 997 1206 1052 1328 3745 current 7 7 7 10 current	36 0 82 0 877 1097 921 1135 2920 history1 6 4 9 9	59 0 81 <1 956 1127 1045 1227 3625 history2 4 4 4 4 4 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >3	26 0 81 <1 997 1206 1052 1328 3745 <u>current</u> 7 7 10 <u>current</u> 0.5	36 0 82 0 877 1097 921 1135 2920 history1 6 4 9 9 history1 0.3	59 0 81 <1 956 1127 1045 1227 3625 history2 4 4 4 4 4 history2 0.3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <i>limit/base</i> >25 >20 <i>limit/base</i> >3 >20	26 0 81 <1 997 1206 1052 1328 3745 <i>current</i> 7 7 7 10 <i>current</i> 0.5 8.8	36 0 82 0 877 1097 921 1135 2920 history1 6 4 9 <u>history1</u> 0.3 7.4	59 0 81 <1 956 1127 1045 1227 3625 history2 4 4 4 4 4 5 0.3 7.1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 225 25 20 20 20 20 3 20 20 20 20 20 20 20 20 20 20 20 20 20	26 0 81 <1 997 1206 1052 1328 3745 current 7 7 10 current 0.5 8.8 20.4	36 0 82 0 877 1097 921 1135 2920 history1 6 4 9 <u>history1</u> 0.3 7.4 19.0	59 0 81 <1 956 1127 1045 1227 3625 history2 4 4 4 4 4 bistory2 0.3 7.1 20.0




OIL ANALYSIS REPORT





VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.7	14.1
GRAPHS						

Ferrous Alloys

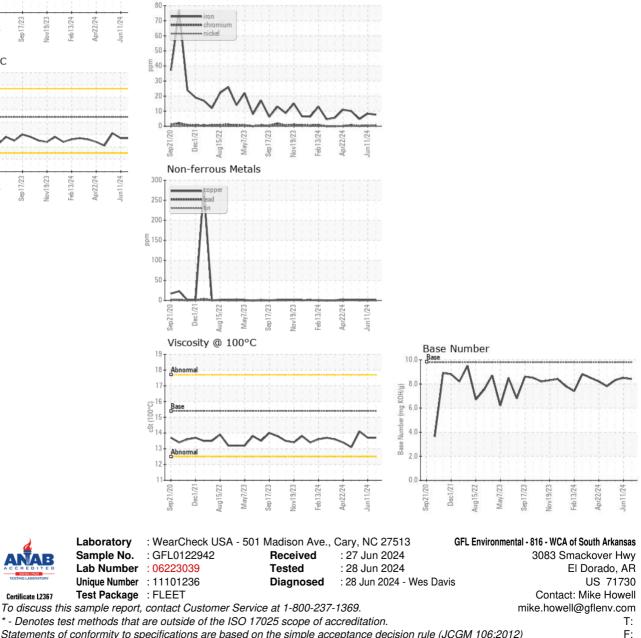

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367