




# OIL ANALYSIS REPORT

Area  
**(48016R) {UNASSIGNED}**  
 Machine Id  
**421044**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA 15W40 (--- GAL)**

## Sample Rating Trend

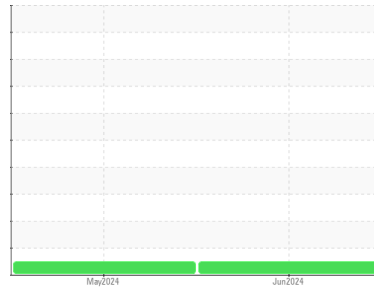

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0119870</b>	GFL0119862	---
Sample Date	Client Info		<b>24 Jun 2024</b>	20 May 2024	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>540</b>	500	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>42</b>	13	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >5	<b>2</b>	<1	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>7</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>3</b>	3	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>66</b>	<1	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>71</b>	64	---
Manganese	ppm	ASTM D5185m	<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>69</b>	1031	---
Calcium	ppm	ASTM D5185m	<b>2406</b>	1150	---
Phosphorus	ppm	ASTM D5185m	<b>1095</b>	1083	---
Zinc	ppm	ASTM D5185m	<b>1341</b>	1366	---
Sulfur	ppm	ASTM D5185m	<b>4596</b>	3507	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	5	---
Sodium	ppm	ASTM D5185m	<b>7</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>6</b>	4	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.6</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.2</b>	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.3</b>	20.1	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.0</b>	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.5</b>	6.7	---







# OIL ANALYSIS REPORT

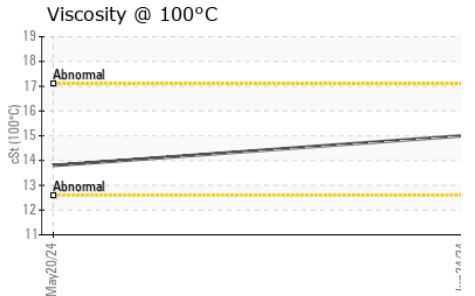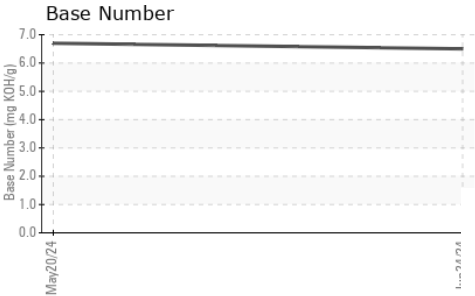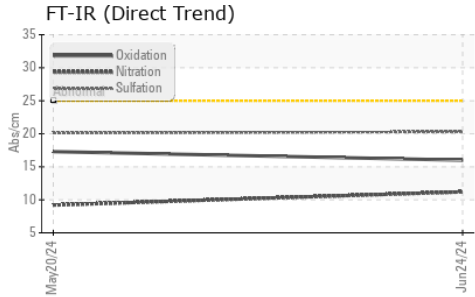

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.0	13.8	---

## GRAPHS

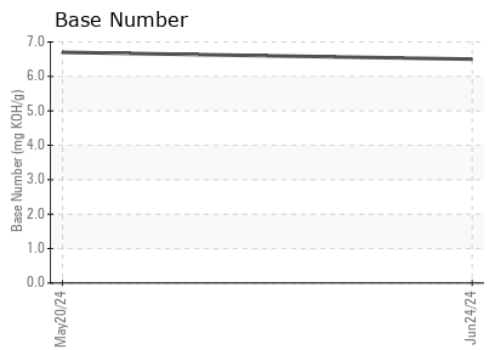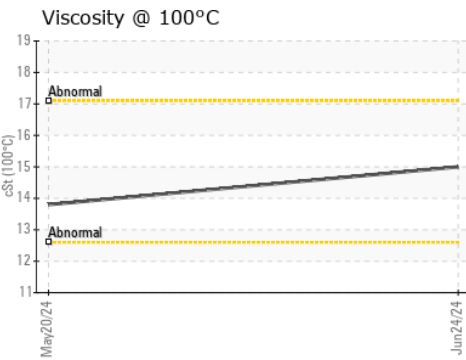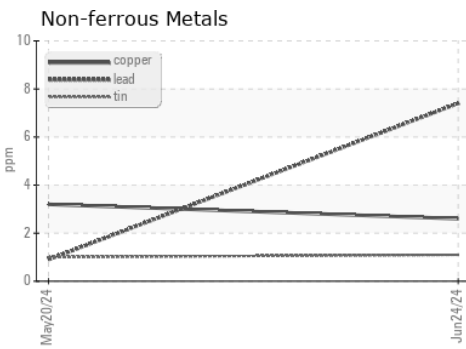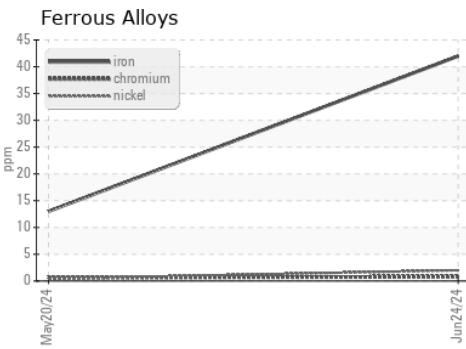

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119870      **Received** : 27 Jun 2024  
**Lab Number** : 06223043      **Tested** : 28 Jun 2024  
**Unique Number** : 11101240      **Diagnosed** : 28 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 958 - Tri County HC Morton**  
 1090 W. Jefferson St.  
 Morton, IL  
 US 61550  
 Contact: Bryan Link  
 blink@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)