




PROBLEM SUMMARY

Sample Rating Trend

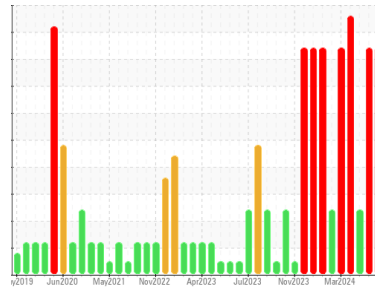


GLYCOL



Machine Id
10682
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (40 GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

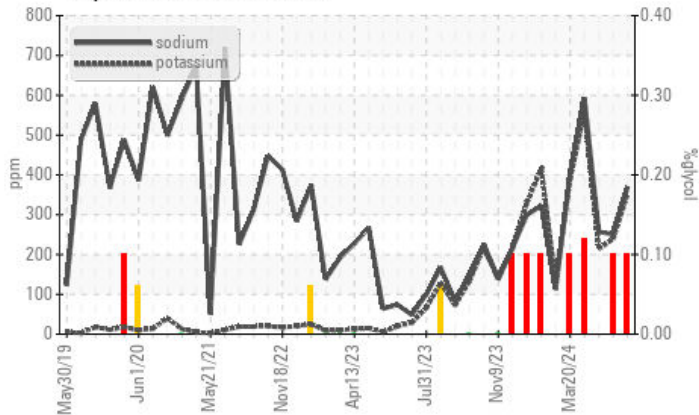

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Sodium	ppm	ASTM D5185m		▲ 370	▲ 251	▲ 257
Potassium	ppm	ASTM D5185m	>20	▲ 353	▲ 239	▲ 214
Glycol	%	*ASTM D2982		▲ 0.10	▲ 0.10	NEG

Customer Id: GFL084
 Sample No.: GFL0098991
 Lab Number: 06223120
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

GLYCOL



13 May 2024 Diag: Jonathan Hester

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



GLYCOL



19 Apr 2024 Diag: Jonathan Hester

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels remain high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



GLYCOL



02 Apr 2024 Diag: Wes Davis

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

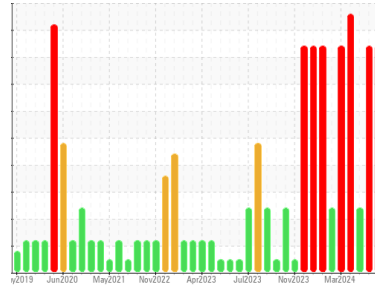

GLYCOL



Machine Id
10682
 Component
Diesel Engine
 Fluid

PETRO CANADA DURON SHP 15W40 (40 GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0098991	GFL0098933	GFL0098909
Sample Date	Client Info		10 Jun 2024	13 May 2024	19 Apr 2024
Machine Age	hrs	Client Info	34110	33959	19296
Oil Age	hrs	Client Info	34110	33959	18544
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	26	15	8
Chromium	ppm	ASTM D5185m >5	1	<1	0
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >15	3	4	2
Lead	ppm	ASTM D5185m >25	1	<1	0
Copper	ppm	ASTM D5185m >100	2	<1	0
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<1	2	<1
Barium	ppm	ASTM D5185m 0	1	0	0
Molybdenum	ppm	ASTM D5185m 60	87	69	70
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	936	866	889
Calcium	ppm	ASTM D5185m 1070	1058	951	1045
Phosphorus	ppm	ASTM D5185m 1150	1023	942	984
Zinc	ppm	ASTM D5185m 1270	1248	1134	1177
Sulfur	ppm	ASTM D5185m 2060	3009	3186	3287

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	8	4
Sodium	ppm	ASTM D5185m	▲ 370	▲ 251	▲ 257
Potassium	ppm	ASTM D5185m >20	▲ 353	▲ 239	▲ 214
Glycol	%	*ASTM D2982	▲ 0.10	▲ 0.10	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	11.0	8.8	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.0	19.0	18.4


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.8	15.1	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.2	9.9	9.6




OIL ANALYSIS REPORT


▲ Glycol Contamination

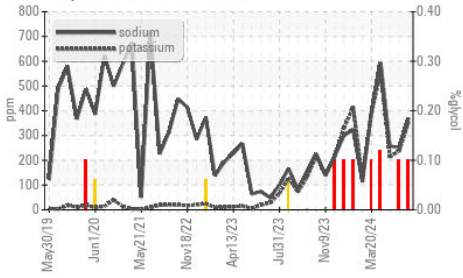


FT-IR (Direct Trend)

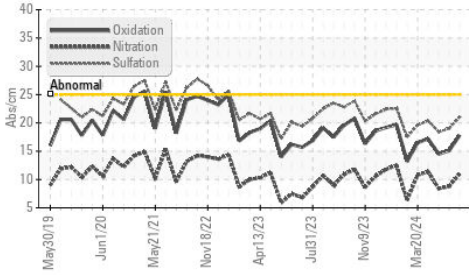

Base Number

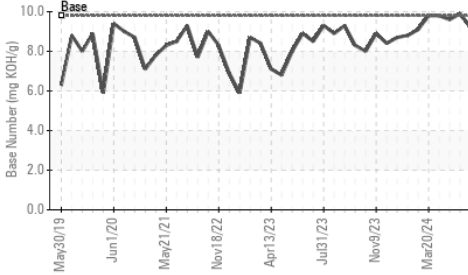

Viscosity @ 100°C

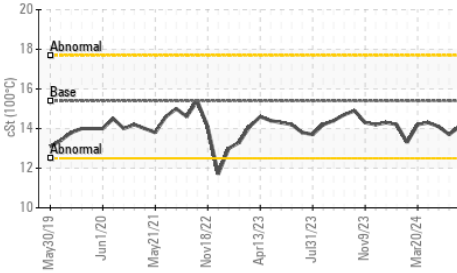

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	13.7

GRAPHS


Ferrous Alloys

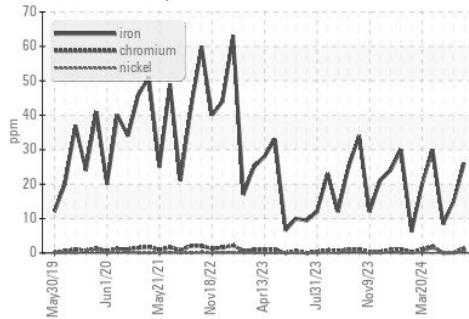


Non-ferrous Metals

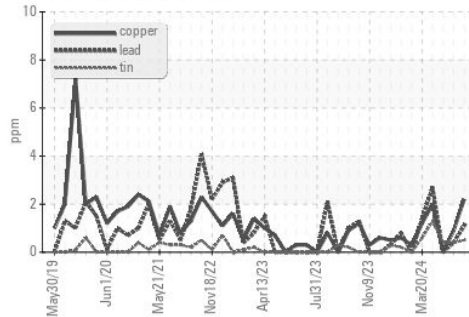

Viscosity @ 100°C

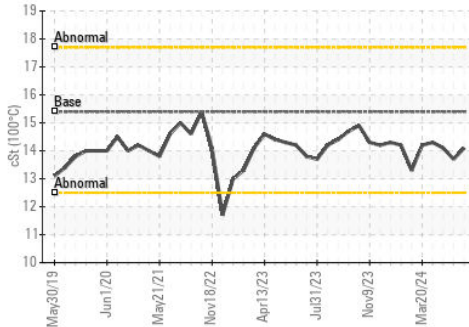

Base Number

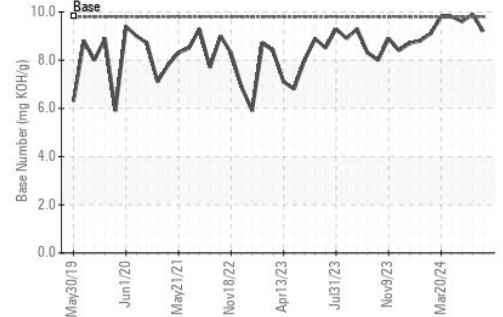

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0098991
 Lab Number : 06223120
 Unique Number : 11101317
 Test Package : FLEET

Received : 28 Jun 2024
 Tested : 01 Jul 2024
 Diagnosed : 01 Jul 2024 - Jonathan Hester

GFL Environmental - 084 - Clarksville

699 Jack Miller Boulevard
 Clarksville, TN
 US 37042

Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com

T: (931)552-7276

F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)