




# OIL ANALYSIS REPORT



Area  
**(61AATE6)**  
Machine Id  
**214010**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## Sample Rating Trend

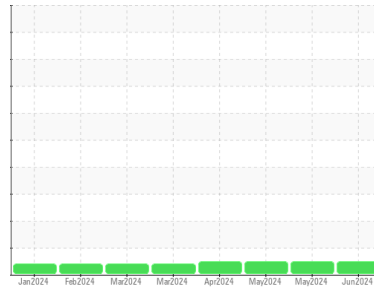

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0115806</b>  | GFL0115841  | GFL0115834  |
| Sample Date   | Client Info |             | <b>25 Jun 2024</b> | 13 May 2024 | 01 May 2024 |
| Machine Age   | hrs         | Client Info | <b>1105</b>        | 814         | 677         |
| Oil Age       | hrs         | Client Info | <b>574</b>         | 283         | 146         |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | Not Chngd   |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >120 | <b>29</b>    | 20       | 14       |
| Chromium | ppm    | ASTM D5185m >20  | <b>2</b>     | 3        | 0        |
| Nickel   | ppm    | ASTM D5185m >5   | <b>&lt;1</b> | 3        | 0        |
| Titanium | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | 2        | 0        |
| Silver   | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | 3        | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>8</b>     | 6        | 3        |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 3        | <1       |
| Copper   | ppm    | ASTM D5185m >330 | <b>10</b>    | 9        | 4        |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | 3        | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 2        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | 2        | 0        |

## ADDITIVES

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>6</b>    | 8        | 9        |
| Barium     | ppm    | ASTM D5185m 0    | <b>2</b>    | 2        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>66</b>   | 62       | 61       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>2</b>    | 3        | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>930</b>  | 828      | 879      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1158</b> | 1080     | 1107     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1049</b> | 924      | 1004     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1269</b> | 1106     | 1182     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3075</b> | 2996     | 3340     |

## CONTAMINANTS

|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>10</b> | 9        | 6        |
| Sodium    | ppm    | ASTM D5185m     | <b>1</b>  | 3        | 2        |
| Potassium | ppm    | ASTM D5185m >20 | <b>20</b> | 9        | 4        |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >4  | <b>0.1</b>  | 0.1      | 0.1      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>8.3</b>  | 6.3      | 6.0      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.8</b> | 17.7     | 17.9     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>16.0</b> | 14.0     | 13.9     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>7.5</b>  | 8.4      | 8.7      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

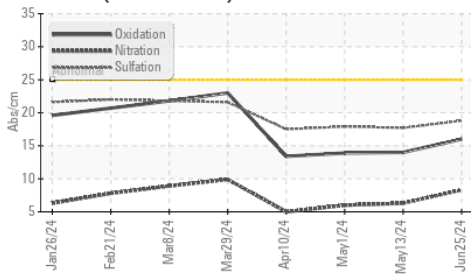

Base Number

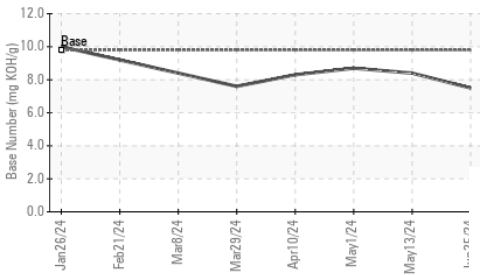

Viscosity @ 100°C

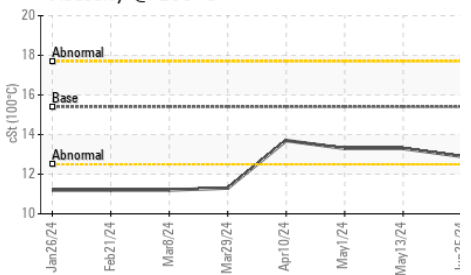


| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 12.9     | 13.3     |

## GRAPHS


Ferrous Alloys

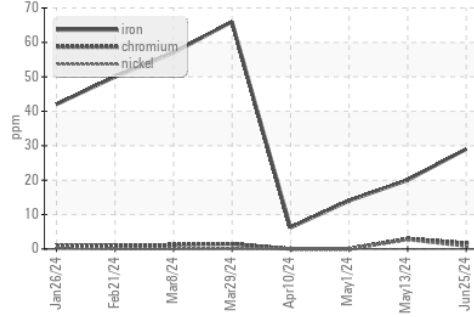


Non-ferrous Metals

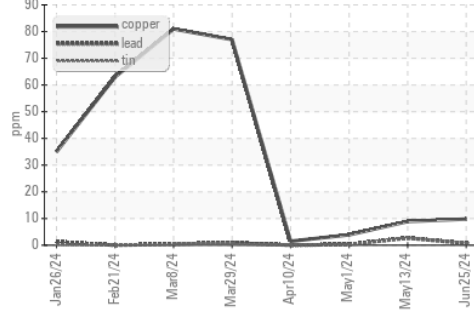

Viscosity @ 100°C

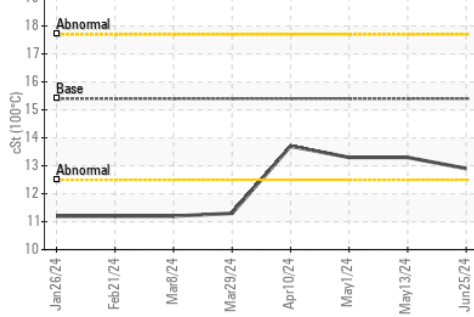

Base Number

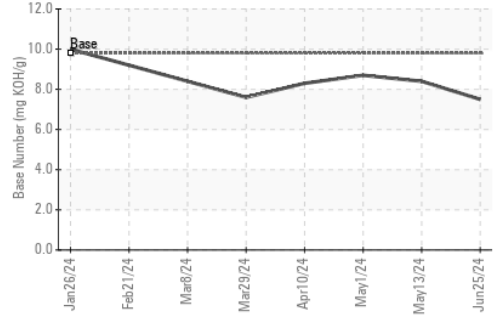

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115806 **Received** : 28 Jun 2024  
**Lab Number** : 06223124 **Tested** : 28 Jun 2024  
**Unique Number** : 11101321 **Diagnosed** : 28 Jun 2024 - Wes Davis  
**Test Package** : FLEET

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL  
 US 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)