




OIL ANALYSIS REPORT

Sample Rating Trend

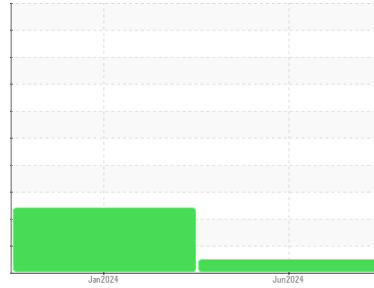

NORMAL



Machine Id

517006

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0114772	GFL0102753	---
Sample Date	Client Info		25 Jun 2024	13 Jan 2024	---
Machine Age	hrs	Client Info	8052	6991	---
Oil Age	hrs	Client Info	1061	6991	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			NORMAL	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	31	38	---
Chromium	ppm	ASTM D5185m >5	4	3	---
Nickel	ppm	ASTM D5185m >2	1	<1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m >3	<1	0	---
Aluminum	ppm	ASTM D5185m >30	31	28	---
Lead	ppm	ASTM D5185m >30	2	<1	---
Copper	ppm	ASTM D5185m >150	9	21	---
Tin	ppm	ASTM D5185m >5	1	<1	---
Vanadium	ppm	ASTM D5185m	<1	<1	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	7	41	---
Barium	ppm	ASTM D5185m 0	1	0	---
Molybdenum	ppm	ASTM D5185m 60	61	62	---
Manganese	ppm	ASTM D5185m 0	1	<1	---
Magnesium	ppm	ASTM D5185m 1010	731	382	---
Calcium	ppm	ASTM D5185m 1070	1390	1787	---
Phosphorus	ppm	ASTM D5185m 1150	868	1032	---
Zinc	ppm	ASTM D5185m 1270	1159	1261	---
Sulfur	ppm	ASTM D5185m 2060	2474	2893	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	6	5	---
Sodium	ppm	ASTM D5185m	4	2	---
Potassium	ppm	ASTM D5185m >20	53	57	---
Fuel	%	ASTM D3524 >5	0.0	▲ 7.3	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	10.2	8.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.9	21.4	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.7	17.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	5.1	6.2	---







OIL ANALYSIS REPORT

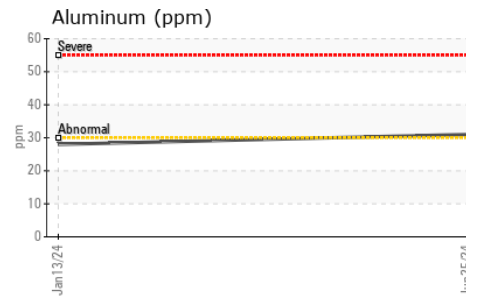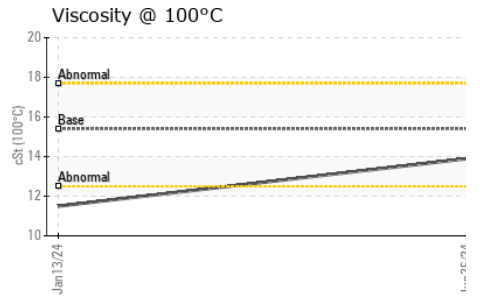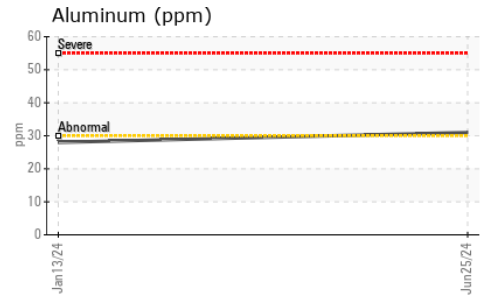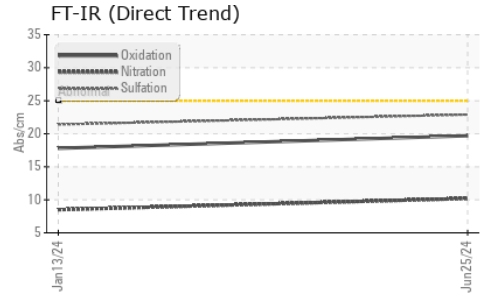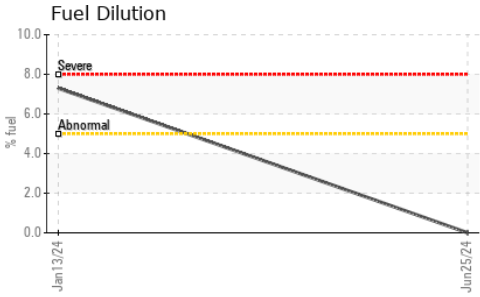

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	▲ 11.5

GRAPHS

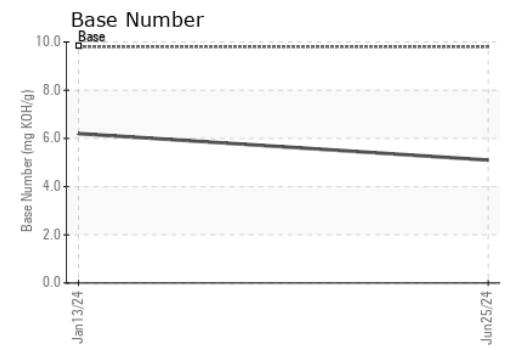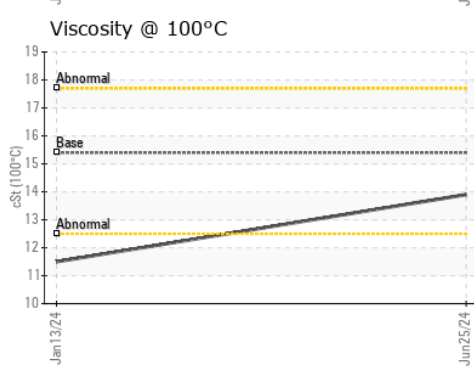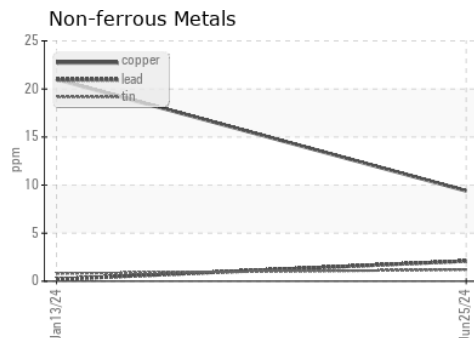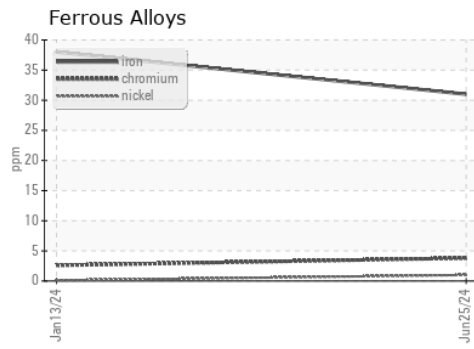

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114772 **Received** : 28 Jun 2024
Lab Number : **06223129** **Tested** : 02 Jul 2024
Unique Number : 11101326 **Diagnosed** : 02 Jul 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 963 - Peoria HC Disposal
 1113 N. Swords Ave.
 West Peoria, IL
 US 61604
 Contact: Corey Dozard
 cdozard@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)