



OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
813107
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

▲ Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.

● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0114773	---	---
Sample Date	Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info	634	---	---
Oil Age	hrs	Client Info	634	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	50	---	---
Chromium	ppm	ASTM D5185m >20	2	---	---
Nickel	ppm	ASTM D5185m >2	16	---	---
Titanium	ppm	ASTM D5185m >2	<1	---	---
Silver	ppm	ASTM D5185m >2	1	---	---
Aluminum	ppm	ASTM D5185m >20	8	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	189	---	---
Tin	ppm	ASTM D5185m >15	4	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	154	---	---
Barium	ppm	ASTM D5185m 0	2	---	---
Molybdenum	ppm	ASTM D5185m 60	113	---	---
Manganese	ppm	ASTM D5185m 0	5	---	---
Magnesium	ppm	ASTM D5185m 1010	732	---	---
Calcium	ppm	ASTM D5185m 1070	1304	---	---
Phosphorus	ppm	ASTM D5185m 1150	679	---	---
Zinc	ppm	ASTM D5185m 1270	859	---	---
Sulfur	ppm	ASTM D5185m 2060	2191	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	▲ 70	---	---
Sodium	ppm	ASTM D5185m	3	---	---
Potassium	ppm	ASTM D5185m >20	12	---	---
Fuel	%	ASTM D3524 >3.0	0.2	---	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.5	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.1	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.3	---	---







OIL ANALYSIS REPORT

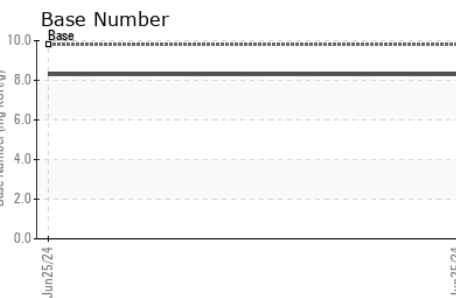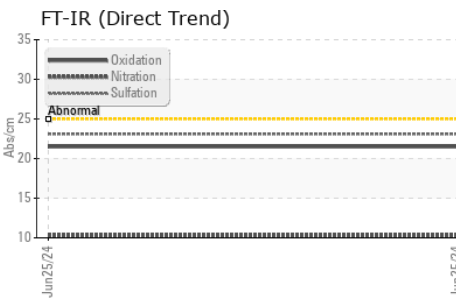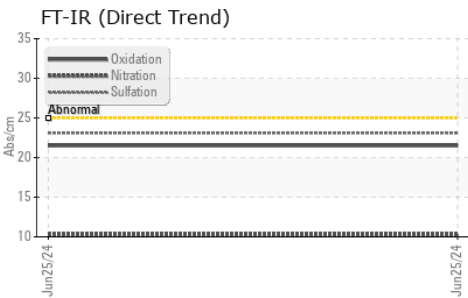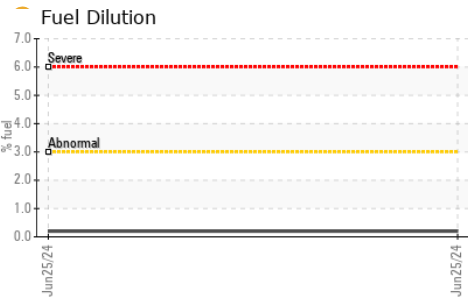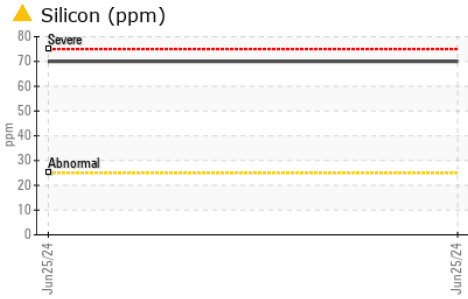

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	10.4	---

GRAPHS

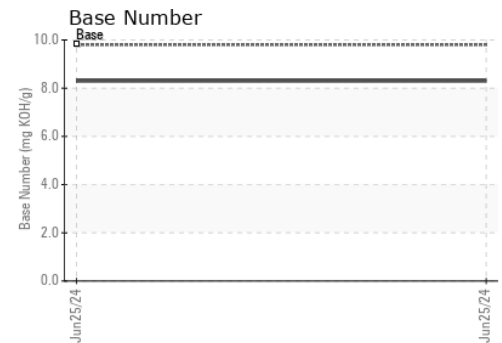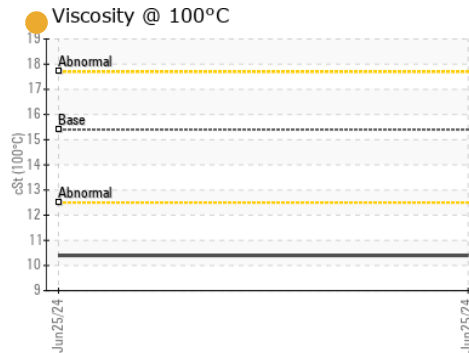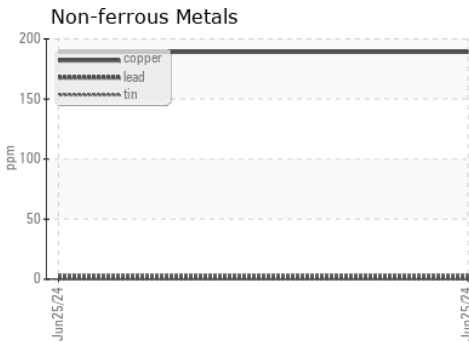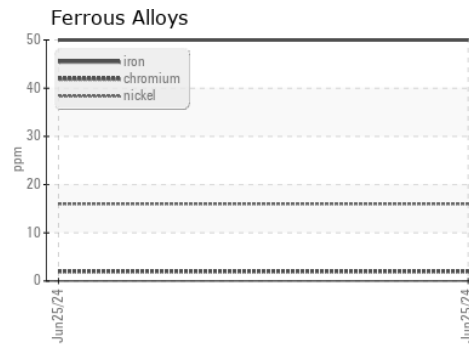

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114773
Lab Number : 06223130
Unique Number : 11101327
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 28 Jun 2024
Tested : 02 Jul 2024
Diagnosed : 02 Jul 2024 - Don Baldrige

GFL Environmental - 963 - Peoria HC Disposal
 1113 N. Swords Ave.
 West Peoria, IL
 US 61604
 Contact: Corey Dozard
 cdozard@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: