



PROBLEM SUMMARY


Area
(YA163155)

Machine Id
10416C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (30 GAL)

Sample Rating Trend

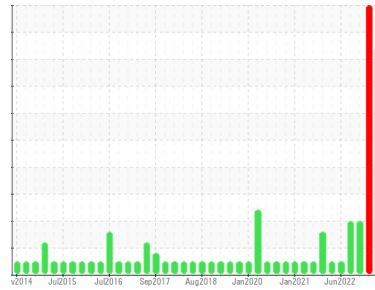


GLYCOL



COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

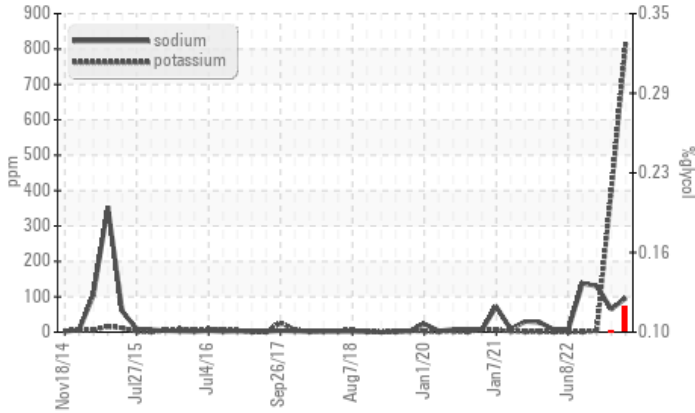

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Sodium	ppm	ASTM D5185m		▲ 96	▲ 65	▲ 130
Potassium	ppm	ASTM D5185m	>20	▲ 816	▲ 398	4
Glycol	%	*ASTM D2982		▲ 0.12	▲ 0.10	---

Customer Id: GFL007
Sample No.: GFL0123388
Lab Number: 06223344
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

14 Nov 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. The iron level is abnormal. The copper level is abnormal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



09 May 2023 Diag: Don Baldrige

COOL CHEMICALS



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. The copper level is abnormal. All other component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



25 Apr 2023 Diag: Jonathan Hester

COOL CHEMICALS



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. The copper level is abnormal. All other component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

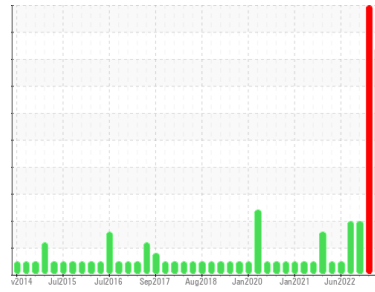

GLYCOL



Area
(YA163155)

Machine Id
10416C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (30 GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0123388	GFL0082490	GFL0050791
Sample Date	Client Info		20 Jun 2024	14 Nov 2023	09 May 2023
Machine Age	hrs	Client Info	98203	98203	0
Oil Age	hrs	Client Info	98203	98203	0
Oil Changed	Client Info		N/A	Changed	N/A
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	21	▲ 78	37
Chromium	ppm	ASTM D5185m >4	1	3	4
Nickel	ppm	ASTM D5185m >2	0	1	2
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	2	2	<1
Lead	ppm	ASTM D5185m >30	3	2	2
Copper	ppm	ASTM D5185m >35	9	▲ 53	▲ 57
Tin	ppm	ASTM D5185m >4	<1	0	2
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	8	15	10
Barium	ppm	ASTM D5185m 5	<1	<1	0
Molybdenum	ppm	ASTM D5185m 50	55	59	64
Manganese	ppm	ASTM D5185m 0	<1	1	1
Magnesium	ppm	ASTM D5185m 560	603	572	580
Calcium	ppm	ASTM D5185m 1510	1706	1736	1646
Phosphorus	ppm	ASTM D5185m 780	828	755	710
Zinc	ppm	ASTM D5185m 870	1087	1016	1014
Sulfur	ppm	ASTM D5185m 2040	3106	2527	2959

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	7	14	9
Sodium	ppm	ASTM D5185m	▲ 96	▲ 65	▲ 130
Potassium	ppm	ASTM D5185m >20	▲ 816	▲ 398	4
Glycol	%	*ASTM D2982	▲ 0.12	▲ 0.10	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624 >20	10.5	10.4	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.0	22.2	24.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.0	17.3	19.2
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	7.2	5.9	4.2




OIL ANALYSIS REPORT


▲ Glycol Contamination

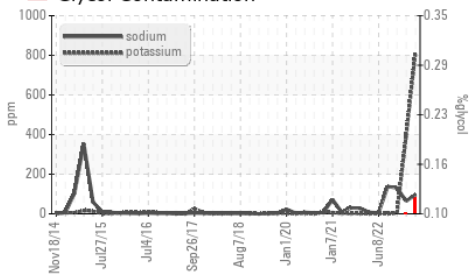


FT-IR (Direct Trend)

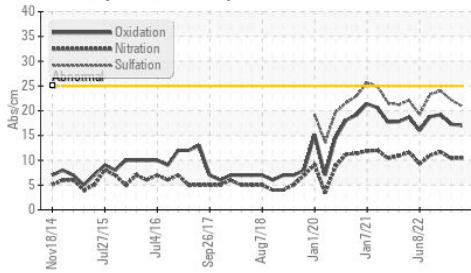

Base Number

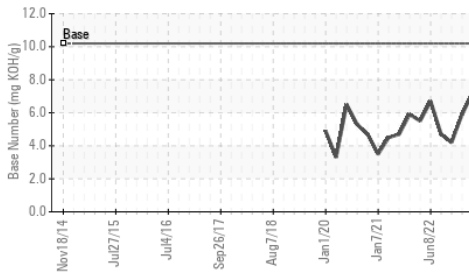

Viscosity @ 100°C

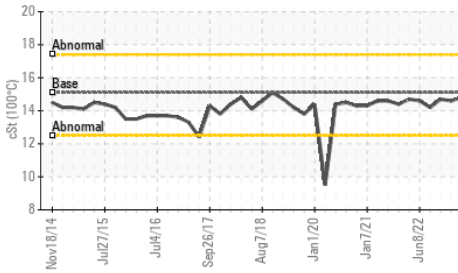

VISUAL


method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 100°C	cSt	ASTM D445	15.1	14.8	14.6	14.7

GRAPHS


Ferrous Alloys

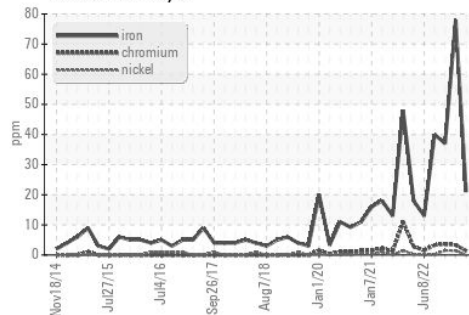


Non-ferrous Metals

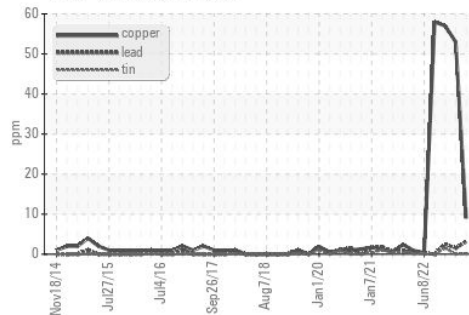

Viscosity @ 100°C

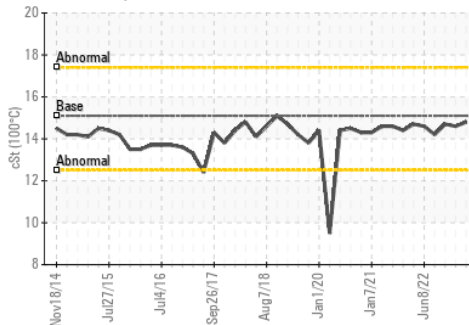

Base Number

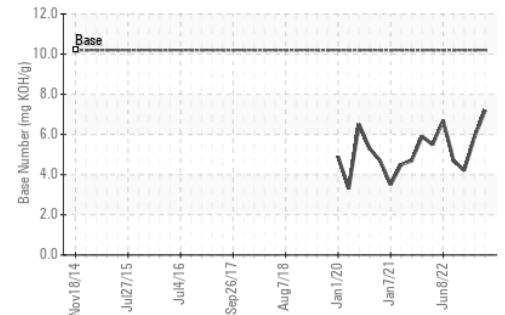

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0123388
 Lab Number : 06223344
 Unique Number : 11101541
 Test Package : FLEET

Received : 28 Jun 2024
 Tested : 01 Jul 2024
 Diagnosed : 01 Jul 2024 - Jonathan Hester

GFL Environmental - 007 - Brunswick
 2809 Galloway Road
 Bolivia, NC
 US 28422
 Contact: DONALD CRAVEN
 dcraven@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)253-4179