




# OIL ANALYSIS REPORT



Area  
**(GFD986)**  
Machine Id  
**934029**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (21 QTS)**

### Sample Rating Trend

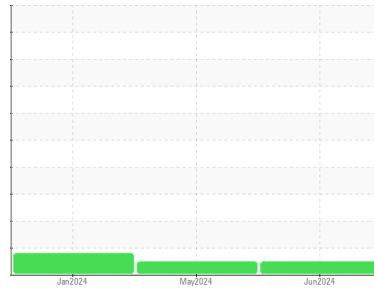

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122643</b>	GFL0114538	GFL0074644
Sample Date	Client Info		<b>25 Jun 2024</b>	08 May 2024	17 Jan 2024
Machine Age	hrs	Client Info	<b>1187</b>	1760	1187
Oil Age	hrs	Client Info	<b>938</b>	573	1187
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>41</b>	30	▲ 76
Chromium	ppm	ASTM D5185m >4	<b>2</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>1</b>	<1	2
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>11</b>	8	19
Lead	ppm	ASTM D5185m >30	<b>4</b>	2	2
Copper	ppm	ASTM D5185m >35	<b>8</b>	4	18
Tin	ppm	ASTM D5185m >4	<b>2</b>	1	3
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	2	4
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	4
Molybdenum	ppm	ASTM D5185m 60	<b>75</b>	70	62
Manganese	ppm	ASTM D5185m 0	<b>3</b>	3	13
Magnesium	ppm	ASTM D5185m 1010	<b>1030</b>	894	853
Calcium	ppm	ASTM D5185m 1070	<b>1321</b>	1140	1144
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	965	807
Zinc	ppm	ASTM D5185m 1270	<b>1398</b>	1195	1013
Sulfur	ppm	ASTM D5185m 2060	<b>2991</b>	2953	2207

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>10</b>	8	28
Sodium	ppm	ASTM D5185m	<b>10</b>	7	6
Potassium	ppm	ASTM D5185m >20	<b>18</b>	15	48

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	9.9	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.9</b>	20.4	25.1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.2</b>	15.6	22.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>2.8</b>	4.0	2.8







# OIL ANALYSIS REPORT

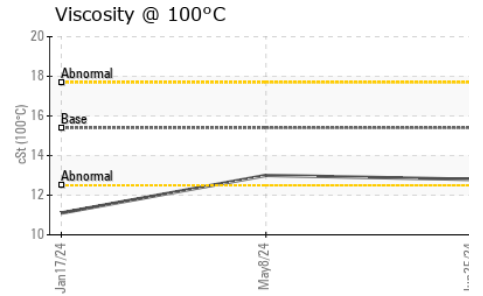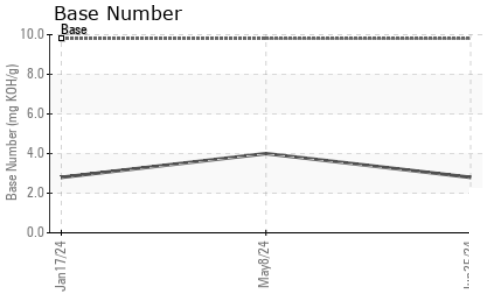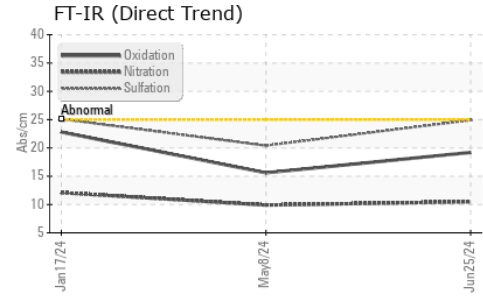

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	13.0	11.1

## GRAPHS

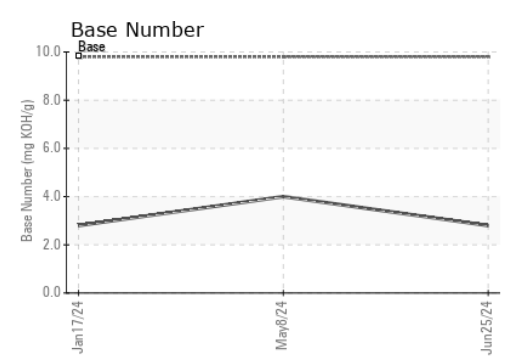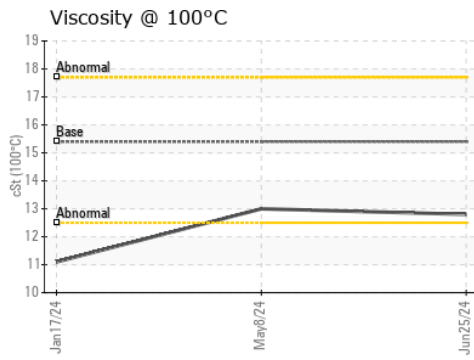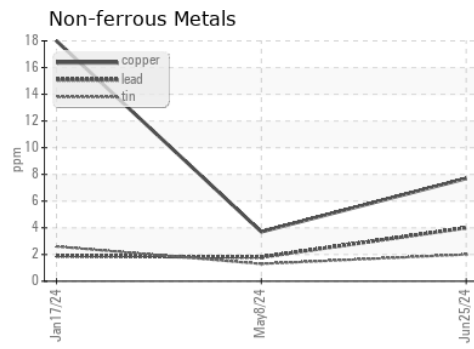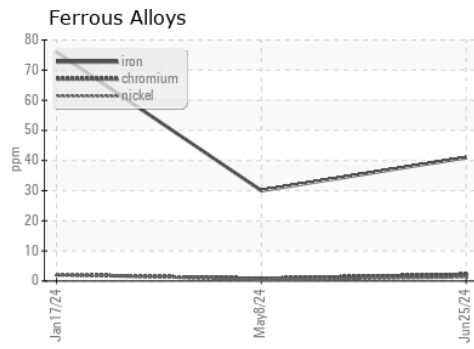

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122643      **Received** : 28 Jun 2024  
**Lab Number** : **06223354**      **Tested** : 01 Jul 2024  
**Unique Number** : 11101551      **Diagnosed** : 01 Jul 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 095 - Atlanta West**  
 2699 Cochran Industrial Blvd  
 Douglasville, GA  
 US 30127-1332  
 Contact: Darrell Welch  
 darrell.welch@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)