




# OIL ANALYSIS REPORT

## Sample Rating Trend

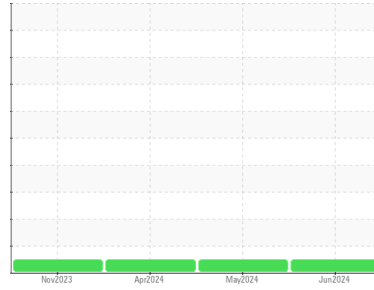

**NORMAL**



Machine Id

**720070**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0111200</b>  | GFL0111208  | GFL0111236  |
| Sample Date   | Client Info | <b>18 Jun 2024</b> | 22 May 2024 | 10 Apr 2024 |
| Machine Age   | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Age       | hrs         | Client Info        | <b>600</b>  | 600         |
| Oil Changed   | Client Info | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current        | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel   | WC Method >5   | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method >0.2 | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >110 | <b>3</b>     | 11       | 20       |
| Chromium | ppm ASTM D5185m >4   | <b>&lt;1</b> | <1       | 1        |
| Nickel   | ppm ASTM D5185m >2   | <b>0</b>     | <1       | 0        |
| Titanium | ppm ASTM D5185m      | <b>&lt;1</b> | <1       | 0        |
| Silver   | ppm ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm ASTM D5185m >25  | <b>&lt;1</b> | 2        | 3        |
| Lead     | ppm ASTM D5185m >45  | <b>0</b>     | <1       | <1       |
| Copper   | ppm ASTM D5185m >85  | <b>&lt;1</b> | 2        | 1        |
| Tin      | ppm ASTM D5185m >4   | <b>0</b>     | <1       | <1       |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>2</b>     | <1       | 0        |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>     | <1       | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>55</b>    | 61       | 58       |
| Manganese  | ppm ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm ASTM D5185m 1010 | <b>999</b>   | 953      | 960      |
| Calcium    | ppm ASTM D5185m 1070 | <b>1124</b>  | 1080     | 1095     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>1090</b>  | 1131     | 1003     |
| Zinc       | ppm ASTM D5185m 1270 | <b>1322</b>  | 1252     | 1204     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>3953</b>  | 3341     | 3448     |

## CONTAMINANTS

| method    | limit/base          | current  | history1 | history2 |
|-----------|---------------------|----------|----------|----------|
| Silicon   | ppm ASTM D5185m >30 | <b>3</b> | 4        | 5        |
| Sodium    | ppm ASTM D5185m     | <b>2</b> | 4        | 5        |
| Potassium | ppm ASTM D5185m >20 | <b>0</b> | 2        | <1       |

## INFRA-RED




| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>0.1</b>  | 0.5      | 0.6      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>5.4</b>  | 8.1      | 9.8      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>17.6</b> | 19.7     | 20.0     |

## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>13.3</b> | 15.6     | 17.3     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>9.2</b>  | 8.3      | 8.1      |







# OIL ANALYSIS REPORT

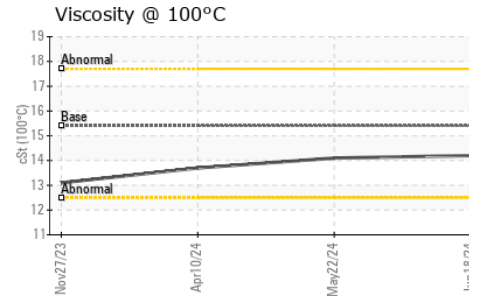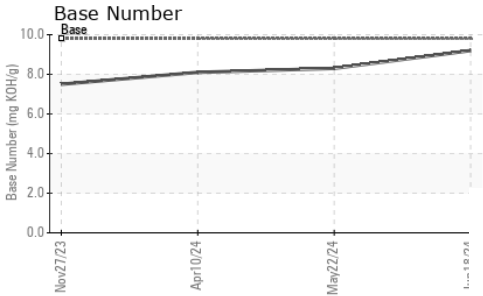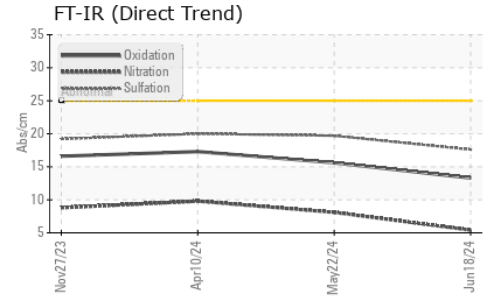

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 14.2     | 14.1     |

## GRAPHS

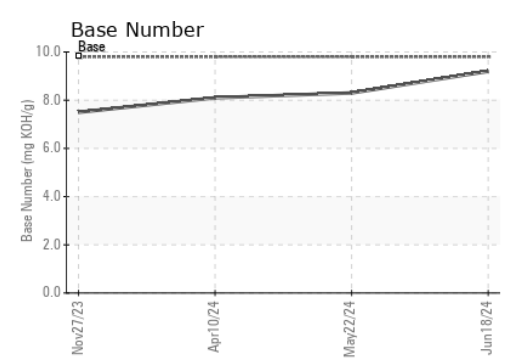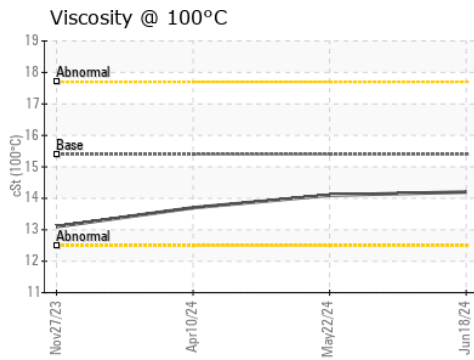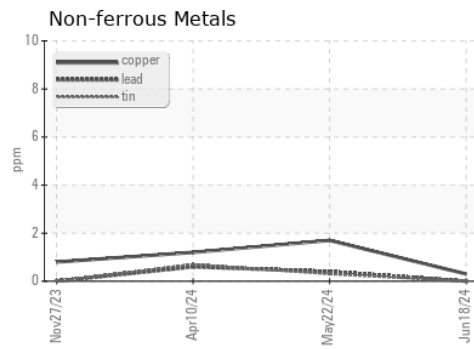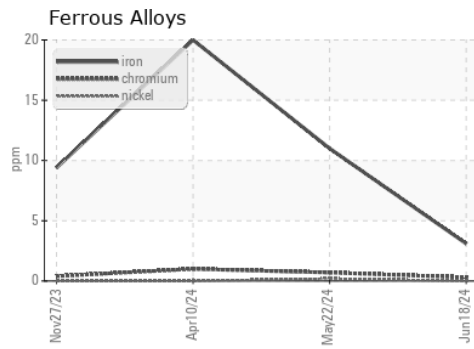

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111200  
**Lab Number** : 06224277  
**Unique Number** : 11102474  
**Test Package** : FLEET

**GFL Environmental - 960B - Pittsfield HC**  
 1335 W. Washington  
 Pittsfield, IL  
 US 62363  
 Contact: David Bradshaw  
 david.bradshaw@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)