




# OIL ANALYSIS REPORT

Sample Rating Trend

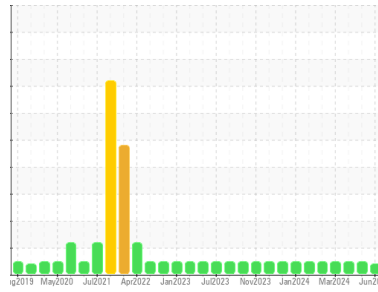

## VISCOSITY



Machine Id  
**928098-205263**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0118200</b>	GFL0118230	GFL0118172	
Sample Date	Client Info	<b>25 Jun 2024</b>	02 May 2024	10 Apr 2024	
Machine Age	hrs	Client Info	<b>18435</b>	18221	18080
Oil Age	hrs	Client Info	<b>150</b>	150	700
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed	
Sample Status		<b>ATTENTION</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>18</b>	6	20
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	3
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>5</b>	1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>44</b>	3	<1
Barium	ppm	ASTM D5185m 0	<b>6</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>16</b>	59	63
Manganese	ppm	ASTM D5185m 0	<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>818</b>	950	975
Calcium	ppm	ASTM D5185m 1070	<b>1365</b>	1108	1111
Phosphorus	ppm	ASTM D5185m 1150	<b>869</b>	1114	1064
Zinc	ppm	ASTM D5185m 1270	<b>1001</b>	1276	1293
Sulfur	ppm	ASTM D5185m 2060	<b>3852</b>	3576	3284

### CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>6</b>	2	3
Sodium	ppm	ASTM D5185m	<b>4</b>	6	8
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	6
Fuel	%	ASTM D3524 >5	<b>1.7</b>	<1.0	<1.0

### INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.3	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	6.6	10.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	18.2	20.8

### FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	13.9	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.2</b>	8.6	7.2







# OIL ANALYSIS REPORT

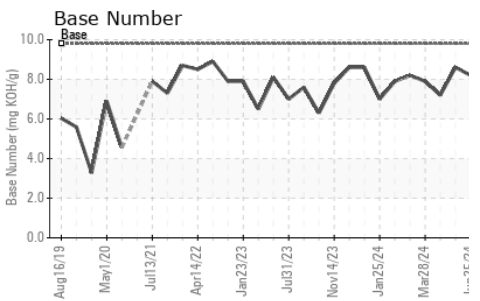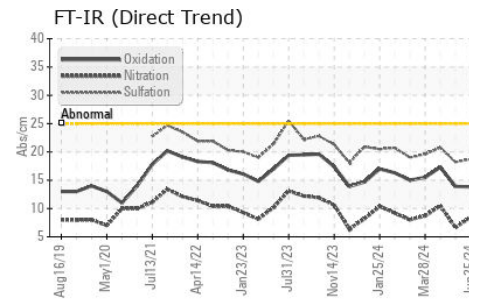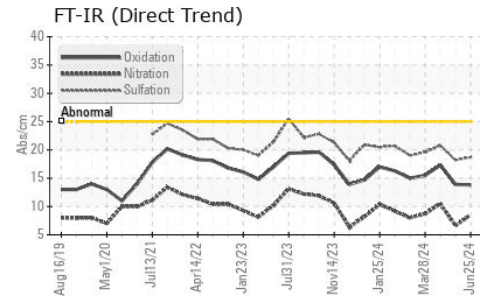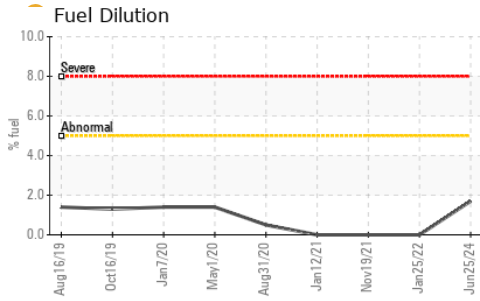

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	11.4	14.1

## GRAPHS

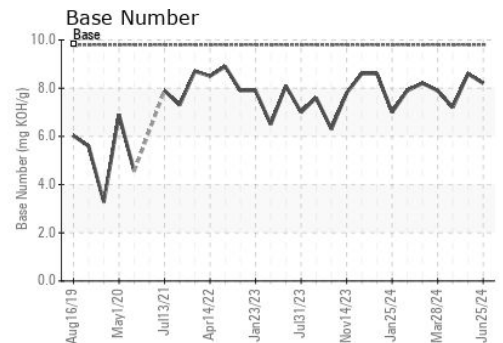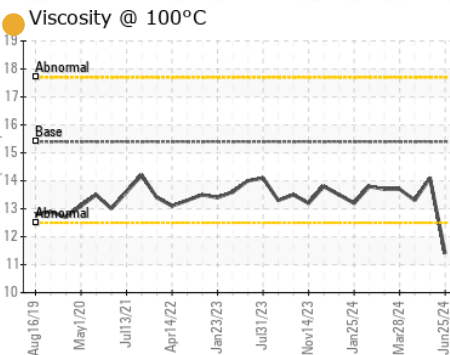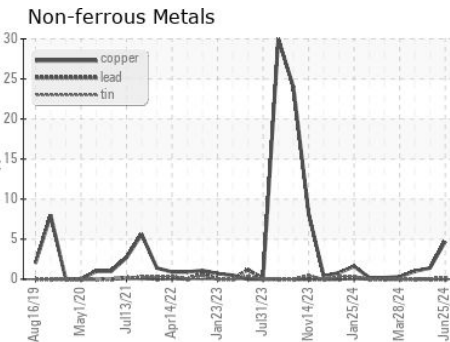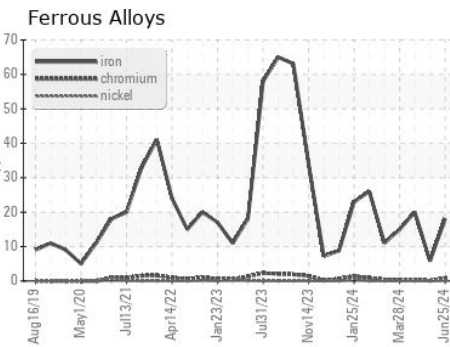

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0118200

Lab Number : 06224335

Unique Number : 11102532

Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 01 Jul 2024

Tested : 03 Jul 2024

Diagnosed : 03 Jul 2024 - Jonathan Hester

GFL Environmental - 822 - Springfield Hauling

2120 West Bennett Street

Springfield, MO

US 65807

Contact: Dennis Moore

dennis.moore@gflenv.com

T: (417)403-3641

F: