


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

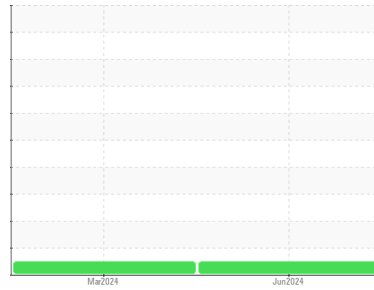

Area  
**(15589Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61251**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0129488</b>	PCA0093941	---
Sample Date	Client Info		<b>24 Jun 2024</b>	11 Mar 2024	---
Machine Age	mls	Client Info	<b>445532</b>	427529	---
Oil Age	mls	Client Info	<b>445532</b>	427529	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>8</b>	13	---
Chromium	ppm	ASTM D5185m >5	<b>1</b>	2	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>1</b>	1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>4</b>	9	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>2</b>	3	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>10</b>	5	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>59</b>	58	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 950	<b>903</b>	869	---
Calcium	ppm	ASTM D5185m 1050	<b>1052</b>	1116	---
Phosphorus	ppm	ASTM D5185m 995	<b>964</b>	988	---
Zinc	ppm	ASTM D5185m 1180	<b>1172</b>	1192	---
Sulfur	ppm	ASTM D5185m 2600	<b>3218</b>	3197	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	6	---
Sodium	ppm	ASTM D5185m	<b>0</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	14	---

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.6</b>	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.6</b>	19.5	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.9</b>	15.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.9</b>	7.2	---








# OIL ANALYSIS REPORT

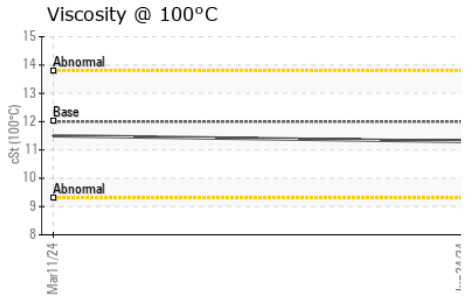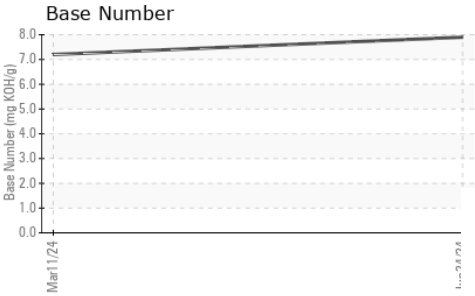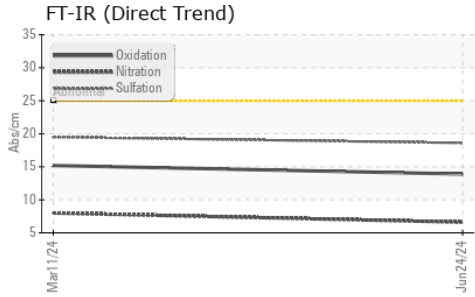

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.5

## GRAPHS

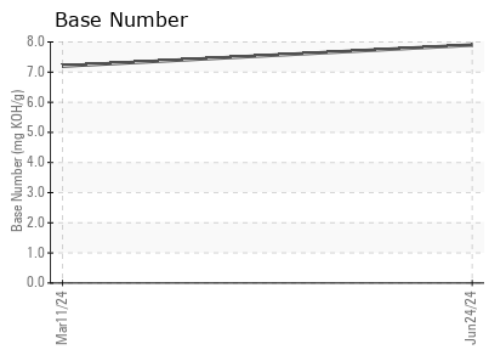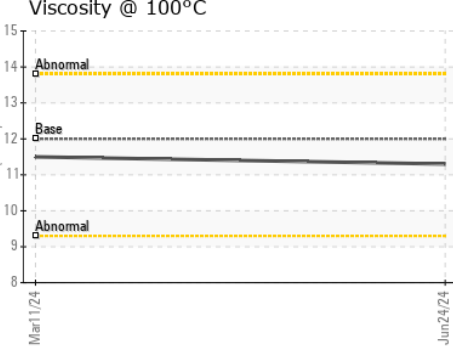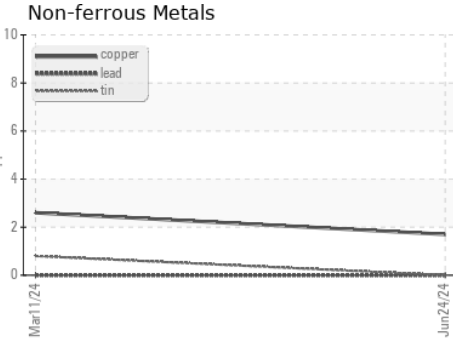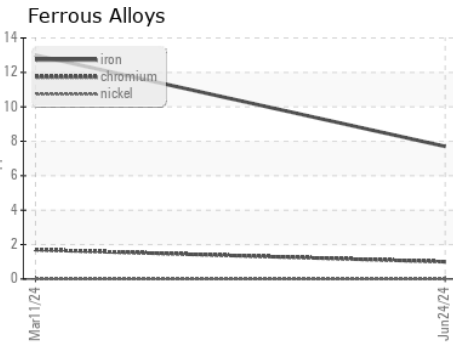

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0129488  
**Lab Number** : 06225467  
**Unique Number** : 11103664  
**Test Package** : FLEET

**Received** : 01 Jul 2024  
**Tested** : 03 Jul 2024  
**Diagnosed** : 03 Jul 2024 - Wes Davis

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551

Contact: Ryan Cruz  
 rcruz@transervice.com

T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)