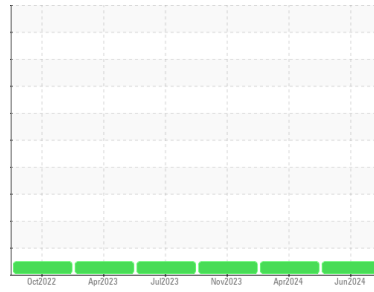


OIL ANALYSIS REPORT

Area
MIXERS
 Machine Id
[MIXERS] M223
 Component
Diesel Engine
 Fluid
KENDALL 15W40 (9 GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0098497	PCA0109794	LP0001112
Sample Date	Client Info			24 Jun 2024	08 Apr 2024	16 Nov 2023
Machine Age	hrs	Client Info		3624	3042	2392
Oil Age	hrs	Client Info		600	600	600
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	6	10	10
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		<1	1	1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	3	2
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	0	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

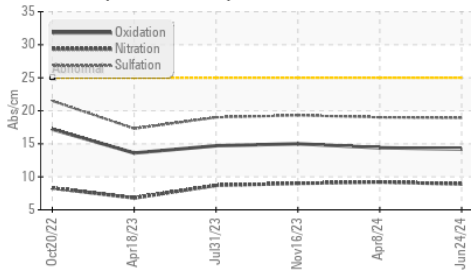
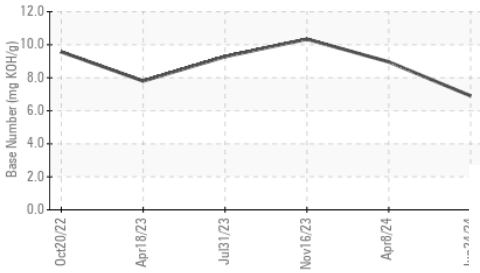
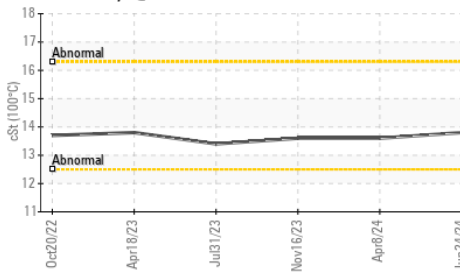
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6.3	45	50	37
Barium	ppm	ASTM D5185m	0.6	0	0	0
Molybdenum	ppm	ASTM D5185m	0.4	83	97	83
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	277	41	108	161
Calcium	ppm	ASTM D5185m	1514	2189	2383	1992
Phosphorus	ppm	ASTM D5185m	634	1007	1127	993
Zinc	ppm	ASTM D5185m	743	1202	1308	1291
Sulfur	ppm	ASTM D5185m	2592	4082	4202	3761

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	5	3
Sodium	ppm	ASTM D5185m		<1	1	4
Potassium	ppm	ASTM D5185m	>20	<1	2	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.9	9.2	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	19.0	19.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.2	14.4	15.0
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	8.96	10.34

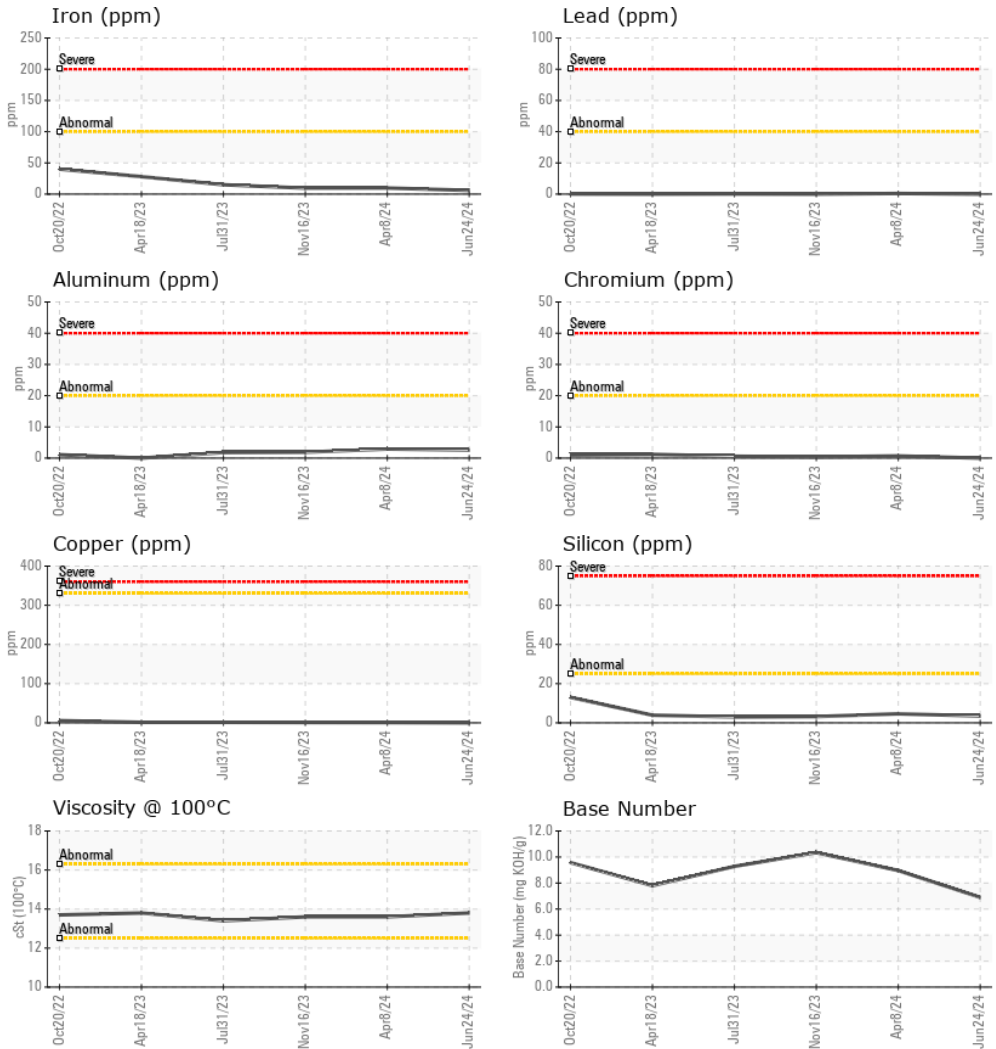
OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.8	13.6	13.6

GRAPHS



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098497 **Received** : 01 Jul 2024
Lab Number : **06225580** **Tested** : 03 Jul 2024
Unique Number : 11103777 **Diagnosed** : 03 Jul 2024 - Wes Davis
Test Package : MOB 2

CONSTRUCTION SERVICES
 2420 BOSTON RD
 WILBRAHAM, MA
 US 01095
 Contact: Michael Dupuis
 mdupuis@cs-ma.us
 T: (413)733-6331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)