




OIL ANALYSIS REPORT

Area
(27KM1B)
 Machine Id
413116
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 5W30 (--- QTS)

Sample Rating Trend

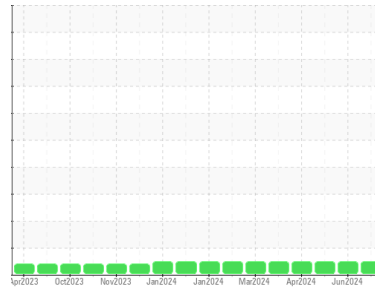

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0122909 | GFL0122872 | GFL0118770 |
| Sample Date | Client Info | | 25 Jun 2024 | 05 Jun 2024 | 08 May 2024 |
| Machine Age | hrs | Client Info | 3253 | 3144 | 2995 |
| Oil Age | hrs | Client Info | 2978 | 3018 | 126 |
| Oil Changed | Client Info | | Changed | Not Changd | Not Changd |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >120 | 9 | 8 | 3 |
| Chromium | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m >15 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 2 | 2 | 1 |
| Lead | ppm | ASTM D5185m >40 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m >330 | 5 | 5 | 1 |
| Tin | ppm | ASTM D5185m >15 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 19 | 26 | 42 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 64 | 54 | 58 | 54 |
| Manganese | ppm | ASTM D5185m 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m 1160 | 1082 | 1163 | 1073 |
| Calcium | ppm | ASTM D5185m 820 | 809 | 884 | 828 |
| Phosphorus | ppm | ASTM D5185m 1160 | 1024 | 1091 | 1068 |
| Zinc | ppm | ASTM D5185m 1260 | 1236 | 1306 | 1206 |
| Sulfur | ppm | ASTM D5185m 3000 | 3637 | 3907 | 3782 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 5 | 4 | 3 |
| Sodium | ppm | ASTM D5185m | 3 | 4 | 4 |
| Potassium | ppm | ASTM D5185m >20 | 4 | 4 | 2 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >4 | 0.3 | 0.2 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 9.6 | 8.7 | 7.4 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 20.1 | 19.6 | 19.2 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 18.5 | 17.9 | 16.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896 11.0 | 8.3 | 8.3 | 9.1 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

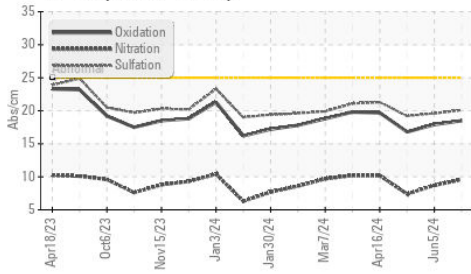

Base Number

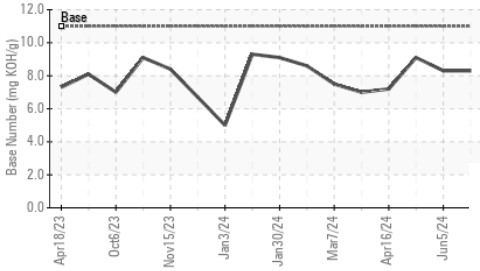

Viscosity @ 100°C

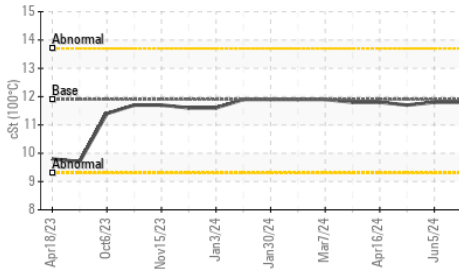


| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 11.9 | 11.8 | 11.7 |

GRAPHS


Ferrous Alloys

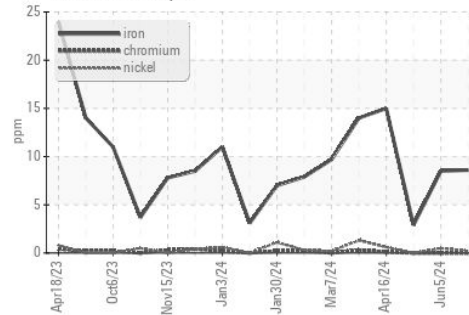


Non-ferrous Metals

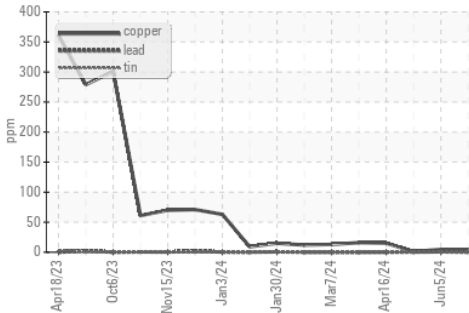

Viscosity @ 100°C

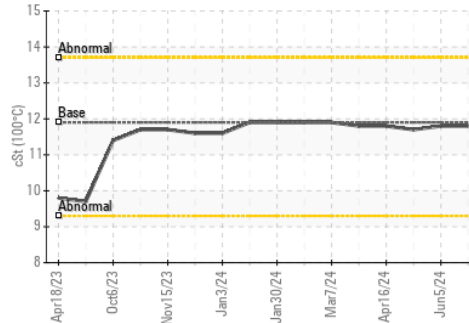

Base Number

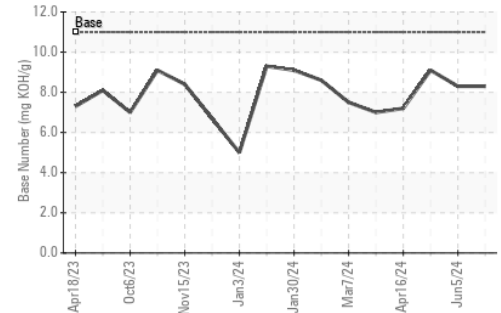

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0122909
 Lab Number : 06225625
 Unique Number : 11103822
 Test Package : FLEET

Received : 01 Jul 2024
 Tested : 03 Jul 2024
 Diagnosed : 03 Jul 2024 - Wes Davis

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)