




# PROBLEM SUMMARY

Sample Rating Trend


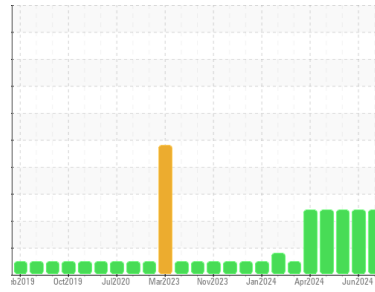


FUEL



Machine Id  
**723031-303001**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## COMPONENT CONDITION SUMMARY

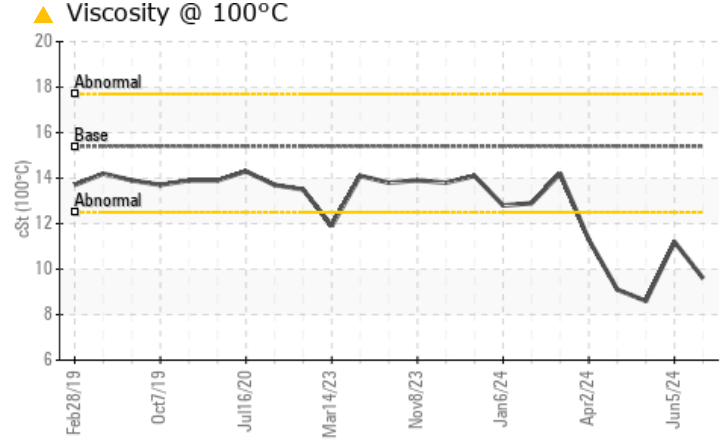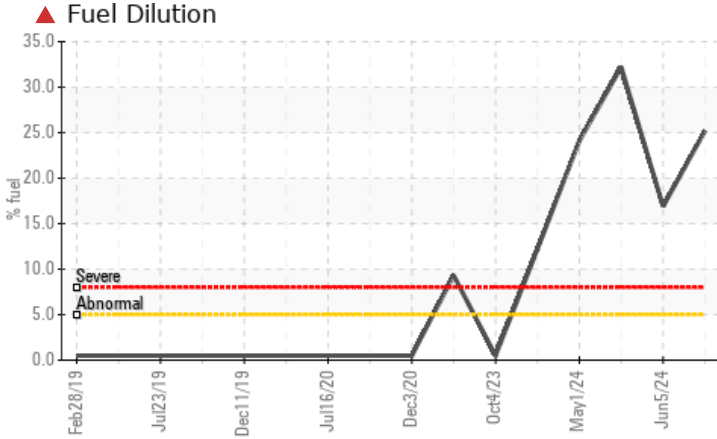

## RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>5	▲ 25.2	▲ 16.9	▲ 32.2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.6	▲ 11.2	▲ 8.6

Customer Id: GFL837  
 Sample No.: GFL0122856  
 Lab Number: 06225641  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

### 05 Jun 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

FUEL



view report



### 09 May 2024 Diag: Jonathan Hester

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

FUEL



view report



### 01 May 2024 Diag: Don Baldrige

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a very high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

FUEL




view report





# OIL ANALYSIS REPORT

Sample Rating Trend

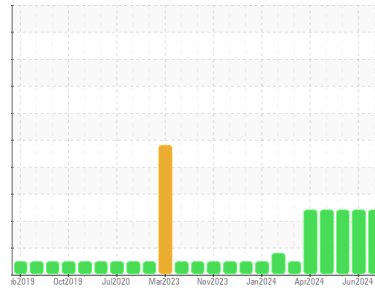

FUEL



Machine Id  
**723031-303001**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a very high amount of fuel present in the oil.

**Fluid Condition**  
 Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122856</b>	GFL0122877	GFL0118825
Sample Date	Client Info		<b>26 Jun 2024</b>	05 Jun 2024	09 May 2024
Machine Age	hrs	Client Info	<b>21074</b>	20939	20791
Oil Age	hrs	Client Info	<b>21074</b>	148	25859
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>SEVERE</b>	SEVERE	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>49</b>	33	68
Chromium	ppm	ASTM D5185m >5	<b>3</b>	2	3
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>9</b>	4	9
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >150	<b>2</b>	3	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	<1	1
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	61	49
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1014</b>	993	733
Calcium	ppm	ASTM D5185m 1070	<b>1203</b>	1174	880
Phosphorus	ppm	ASTM D5185m 1150	<b>1025</b>	1028	811
Zinc	ppm	ASTM D5185m 1270	<b>1321</b>	1294	1000
Sulfur	ppm	ASTM D5185m 2060	<b>2544</b>	2986	2074

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>16</b>	8	17
Sodium	ppm	ASTM D5185m	<b>5</b>	4	16
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	3
Fuel	%	ASTM D3524 >5	<b>▲ 25.2</b>	▲ 16.9	▲ 32.2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.4</b>	1.1	1.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>14.3</b>	12.8	16.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.8</b>	23.5	29.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>24.5</b>	23.3	35.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.6</b>	7.8	5.6




# OIL ANALYSIS REPORT


## Fuel Dilution

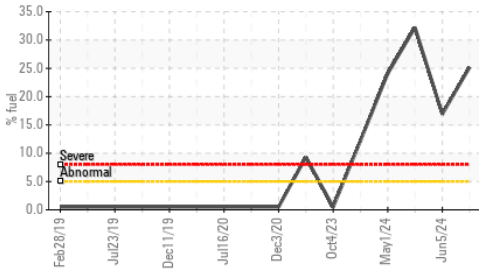


## FT-IR (Direct Trend)

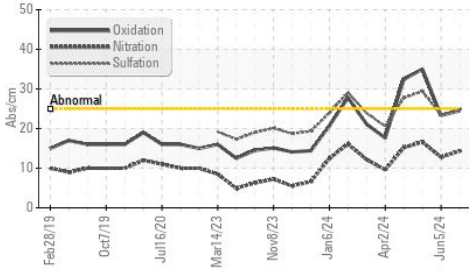

## FT-IR (Direct Trend)

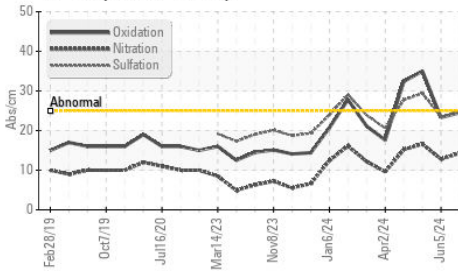

## Base Number

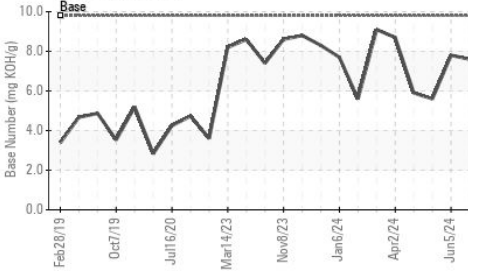


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.6	▲ 11.2

## GRAPHS


### Ferrous Alloys

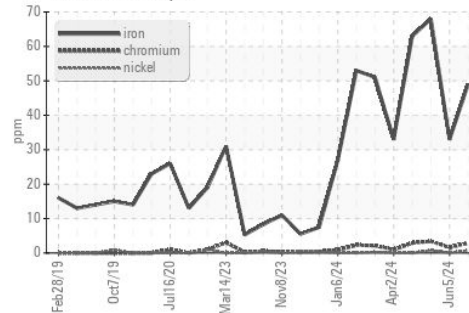


### Non-ferrous Metals

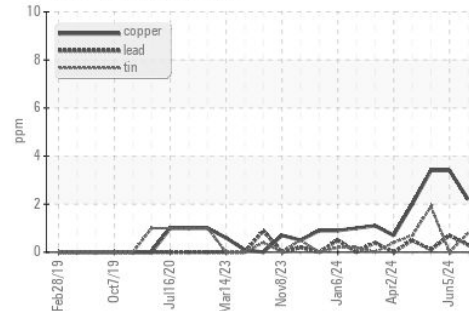

### Viscosity @ 100°C

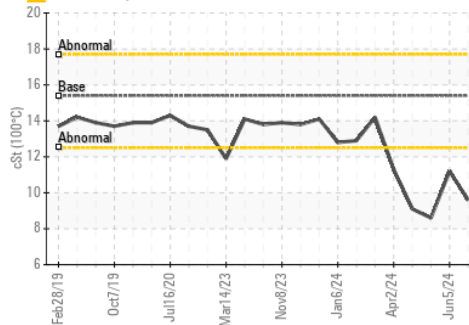

### Base Number

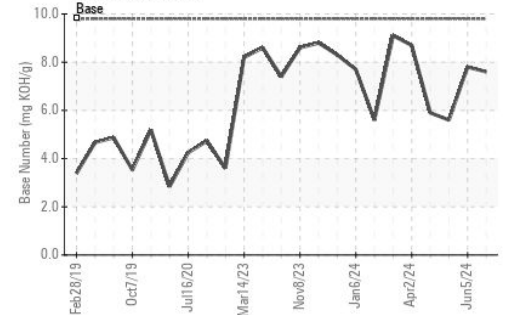

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0122856

Lab Number : 06225641

Unique Number : 11103838

Test Package : FLEET ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 01 Jul 2024

Tested : 03 Jul 2024

Diagnosed : 03 Jul 2024 - Angela Borella

GFL Environmental - 837 - Harrison TS

22820 S State Route 291

Harrisonville, MO

US 64701

Contact: SARA PATRICK

spatrack@gflenv.com

T:

F: