




# OIL ANALYSIS REPORT

Sample Rating Trend

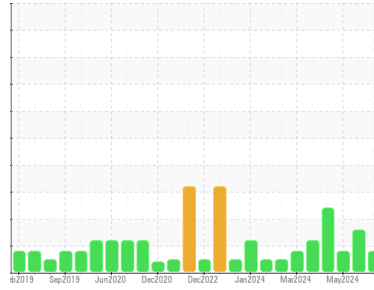

FUEL



Machine Id  
**723033-303003**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0122898</b>	GFL0122874	GFL0118840
Sample Date	Client Info	<b>25 Jun 2024</b>	05 Jun 2024	16 May 2024
Machine Age	hrs	<b>22011</b>	21891	21737
Oil Age	hrs	<b>22550</b>	22430	135
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>MARGINAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>80	<b>14</b>	38	18
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>30	<b>1</b>	6	2
Copper	ppm	ASTM D5185m	>150	<b>44</b>	▲ 180	25
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>3</b>	<1	<1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>58</b>	58	56
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	0
Magnesium	ppm	ASTM D5185m	1010	<b>891</b>	958	849
Calcium	ppm	ASTM D5185m	1070	<b>1079</b>	1107	1019
Phosphorus	ppm	ASTM D5185m	1150	<b>961</b>	1014	974
Zinc	ppm	ASTM D5185m	1270	<b>1192</b>	1269	1125
Sulfur	ppm	ASTM D5185m	2060	<b>2816</b>	3059	2874

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	7	5
Sodium	ppm	ASTM D5185m		<b>3</b>	7	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	4
Fuel	%	ASTM D3524	>5	▲ <b>2.2</b>	▲ 7.7	▲ 5.2

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.8	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.1</b>	10.1	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	20.8	19.4


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.8</b>	18.0	15.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.7</b>	7.2	8.3




# OIL ANALYSIS REPORT


## Fuel Dilution

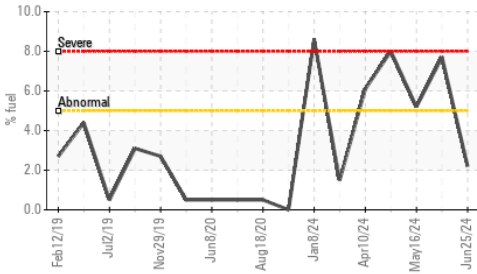


## FT-IR (Direct Trend)

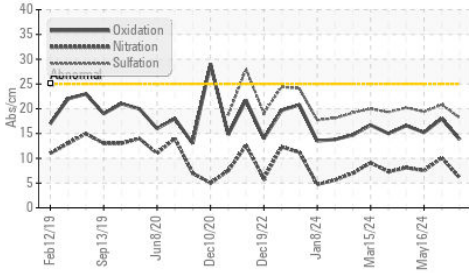

## Base Number

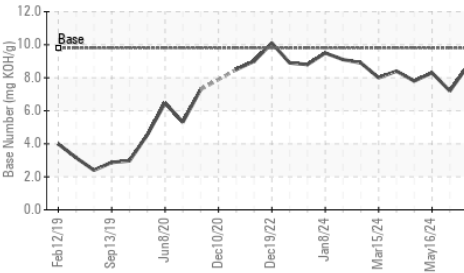

## Viscosity @ 100°C

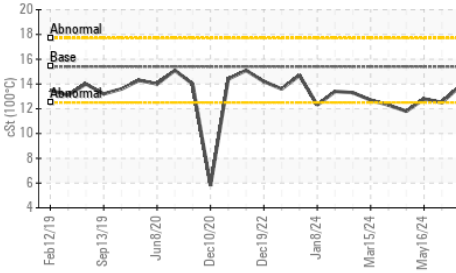

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	12.5

## GRAPHS


### Ferrous Alloys

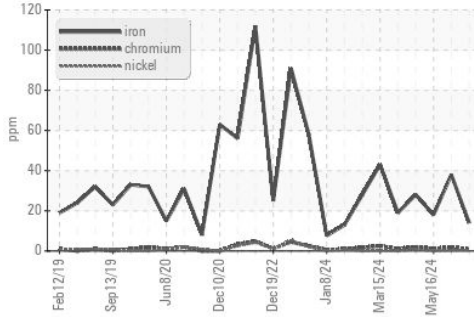


### Non-ferrous Metals

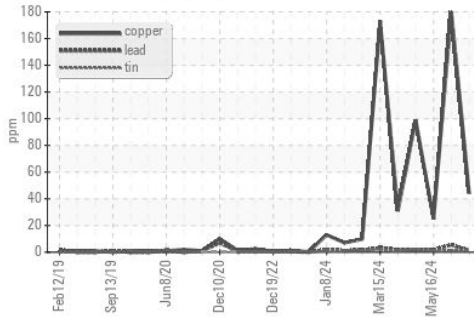

### Viscosity @ 100°C

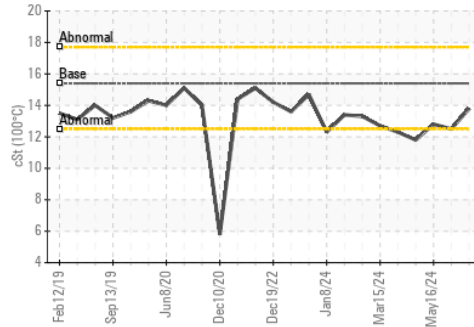

### Base Number

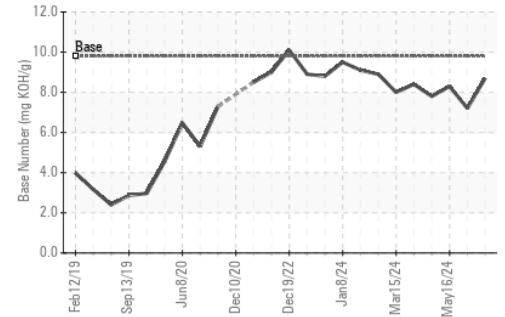

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0122898

Lab Number : 06225642

Unique Number : 11103839

Test Package : FLEET ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 01 Jul 2024

Tested : 03 Jul 2024

Diagnosed : 03 Jul 2024 - Wes Davis

GFL Environmental - 837 - Harrison TS

22820 S State Route 291

Harrisonville, MO

US 64701

Contact: SARA PATRICK

spatrack@gflenv.com

T:

F: