




OIL ANALYSIS REPORT

Sample Rating Trend

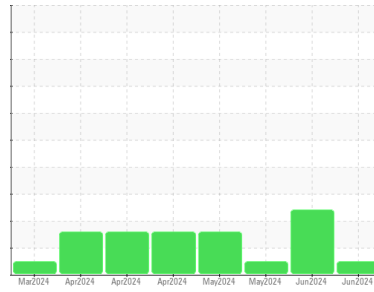

NORMAL



Machine Id
814034
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0122944	GFL0115396	GFL0115442
Sample Date	Client Info		30 Jun 2024	11 Jun 2024	21 May 2024
Machine Age	hrs	Client Info	954	820	674
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	14	10	6
Chromium	ppm	ASTM D5185m >20	<1	<1	0
Nickel	ppm	ASTM D5185m >5	3	2	0
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	2	1	<1
Aluminum	ppm	ASTM D5185m >20	3	3	2
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	141	42	28
Tin	ppm	ASTM D5185m >15	1	1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	25	35	59
Barium	ppm	ASTM D5185m 10	<1	0	0
Molybdenum	ppm	ASTM D5185m 100	90	87	85
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	914	902	937
Calcium	ppm	ASTM D5185m 3000	1164	1144	1118
Phosphorus	ppm	ASTM D5185m 1150	891	893	1031
Zinc	ppm	ASTM D5185m 1350	1152	1141	1161
Sulfur	ppm	ASTM D5185m 4250	2403	2984	3413

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	9	10
Sodium	ppm	ASTM D5185m >216	2	44	2
Potassium	ppm	ASTM D5185m >20	6	45	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.3	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.0	7.1	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.7	20.1	19.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.7	15.7	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.4	8.1	8.4




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

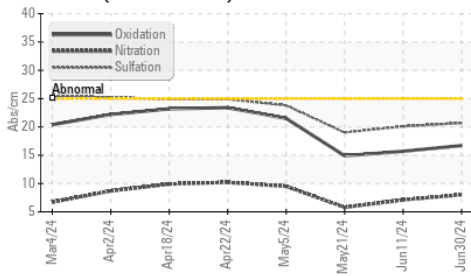


Viscosity @ 40°C

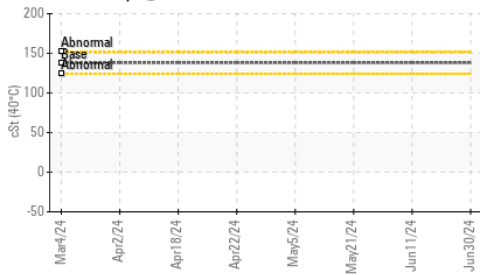

Viscosity @ 100°C

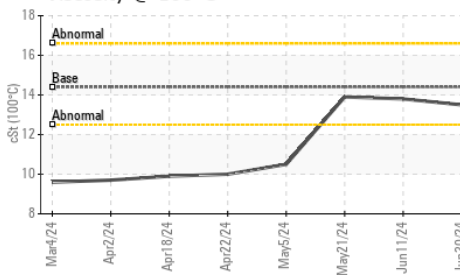

Viscosity @ 40°C

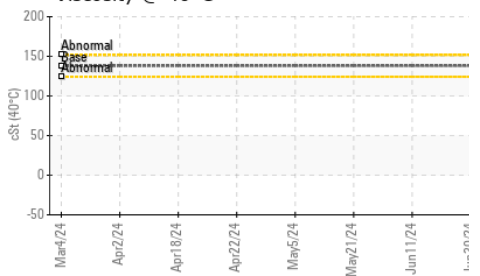


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.8

GRAPHS


Ferrous Alloys

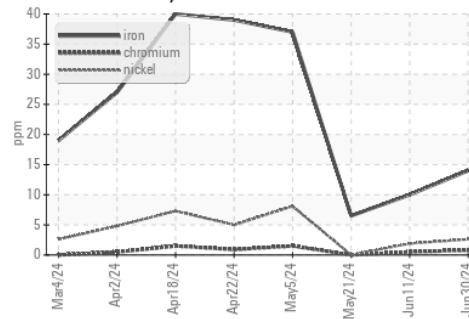


Non-ferrous Metals

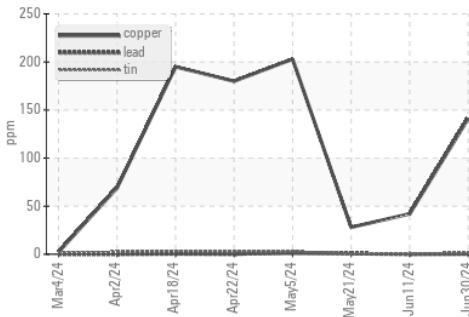

Viscosity @ 100°C

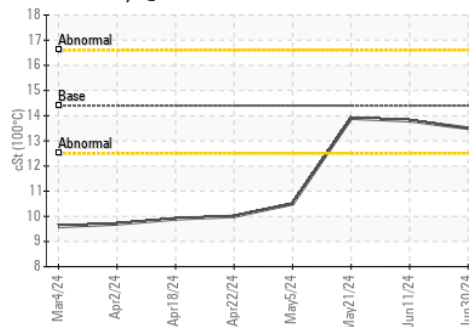

Base Number

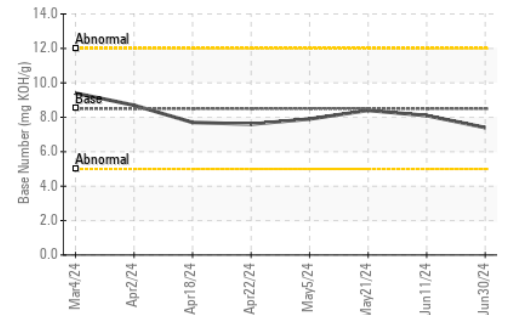

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0122944

Lab Number : 06225655

Unique Number : 11103852

Test Package : FLEET (Additional Tests: KV40)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 01 Jul 2024

Tested : 03 Jul 2024

Diagnosed : 03 Jul 2024 - Don Baldrige

GFL Environmental - 816 - WCA of South Arkansas

3083 Smackover Hwy

El Dorado, AR

US 71730

Contact: Mike Howell

mike.howell@gflenv.com

T:

F: