




# OIL ANALYSIS REPORT

Machine Id  
**414077**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- LTR)**

### Sample Rating Trend

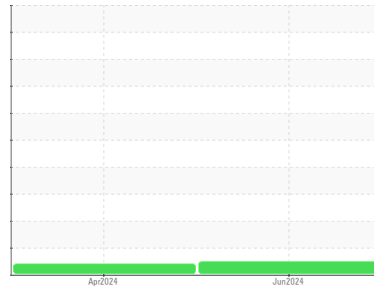

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122711</b>	GFL0110209	---
Sample Date	Client Info		<b>27 Jun 2024</b>	25 Apr 2024	---
Machine Age	hrs	Client Info	<b>1060</b>	647	---
Oil Age	hrs	Client Info	<b>600</b>	600	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ATTENTION	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	0.3	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>11</b>	35	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m >5	<b>1</b>	8	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>2</b>	1	---
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	16	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	---
Copper	ppm	ASTM D5185m >330	<b>29</b>	160	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	4	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>17</b>	146	---
Barium	ppm	ASTM D5185m 10	<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185m 100	<b>64</b>	116	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	5	---
Magnesium	ppm	ASTM D5185m 450	<b>813</b>	796	---
Calcium	ppm	ASTM D5185m 3000	<b>1131</b>	1598	---
Phosphorus	ppm	ASTM D5185m 1150	<b>894</b>	830	---
Zinc	ppm	ASTM D5185m 1350	<b>1136</b>	995	---
Sulfur	ppm	ASTM D5185m 4250	<b>2493</b>	3129	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	54	---
Sodium	ppm	ASTM D5185m >158	<b>0</b>	3	---
Potassium	ppm	ASTM D5185m >20	<b>16</b>	36	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	9.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	23.7	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	21.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>7.6</b>	7.2	---







# OIL ANALYSIS REPORT

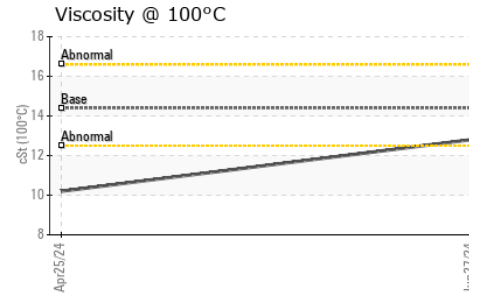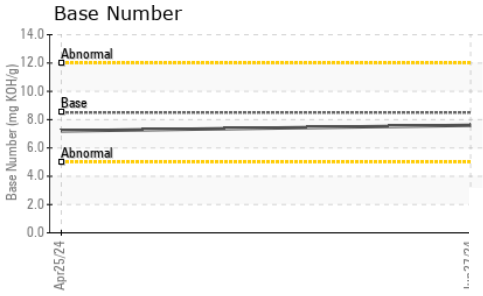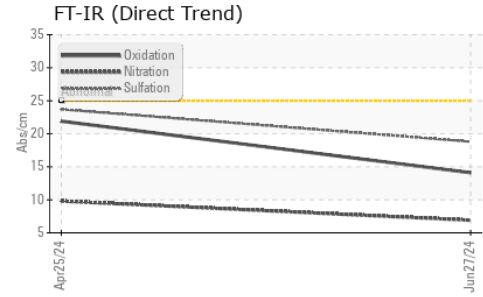

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	10.2

## GRAPHS

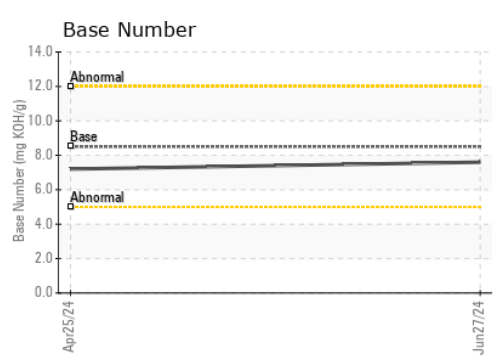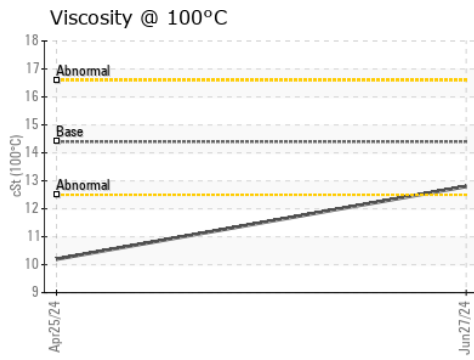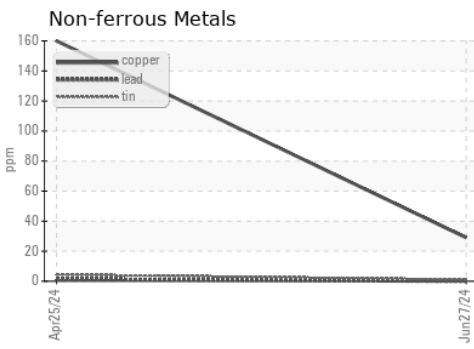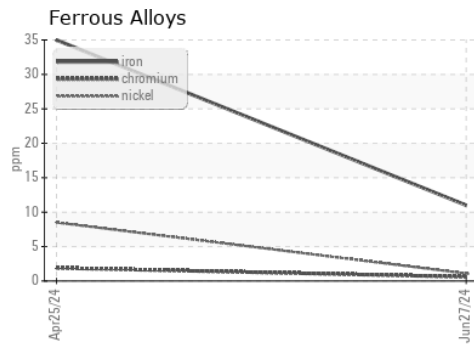

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122711      **Received** : 01 Jul 2024  
**Lab Number** : 06225661      **Tested** : 02 Jul 2024  
**Unique Number** : 11103858      **Diagnosed** : 02 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 660 - Lynchburg Hauling**  
 2410 Mayflower Drive  
 Lynchburg, VA  
 US 24501  
 Contact: Delbert Beasley  
 dbeasley@countyrecycling.net  
 T: (434)665-5998  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)