




# OIL ANALYSIS REPORT

Sample Rating Trend

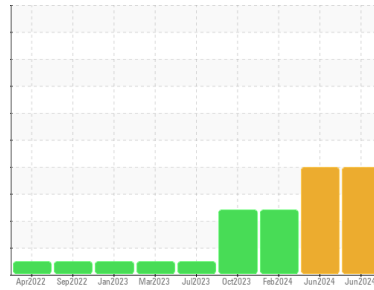

Machine Id

**828040**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122682</b>	GFL0122702	GFL0110188
Sample Date	Client Info		<b>27 Jun 2024</b>	07 Jun 2024	19 Feb 2024
Machine Age	hrs	Client Info	<b>12996</b>	12853	12613
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>110	<b>21</b>	13	27
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	<1	2
Lead	ppm	ASTM D5185m	>45	<b>1</b>	1	4
Copper	ppm	ASTM D5185m	>85	<b>18</b>	13	1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>6</b>	5	8
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>75</b>	66	76
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>857</b>	873	933
Calcium	ppm	ASTM D5185m	1070	<b>1127</b>	1116	1055
Phosphorus	ppm	ASTM D5185m	1150	<b>983</b>	1061	1095
Zinc	ppm	ASTM D5185m	1270	<b>1237</b>	1262	1315
Sulfur	ppm	ASTM D5185m	2060	<b>2835</b>	3630	3092

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	<b>▲ 43</b>	▲ 33	16
Sodium	ppm	ASTM D5185m		<b>▲ 447</b>	▲ 311	▲ 476
Potassium	ppm	ASTM D5185m	>20	<b>▲ 39</b>	▲ 28	▲ 35
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.1	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	5.8	10.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	17.5	21.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.1</b>	12.7	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.6</b>	9.3	7.9




# OIL ANALYSIS REPORT


### ▲ Silicon (ppm)

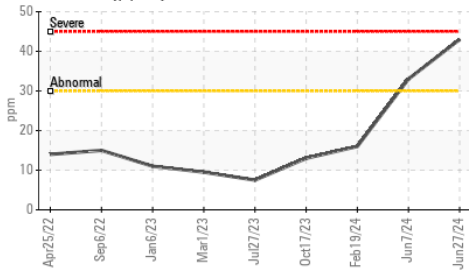


### FT-IR (Direct Trend)

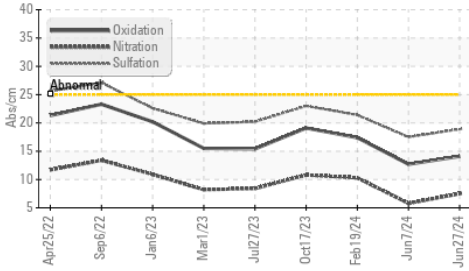


### Glycol Contamination

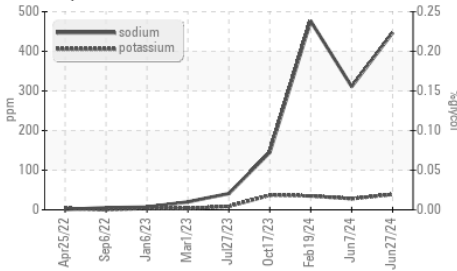

### Viscosity @ 100°C

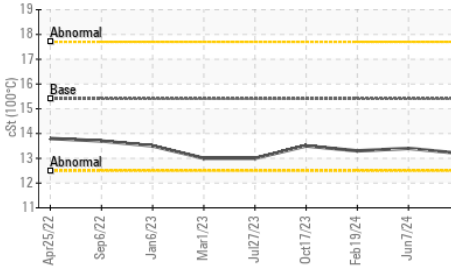

### Glycol Contamination

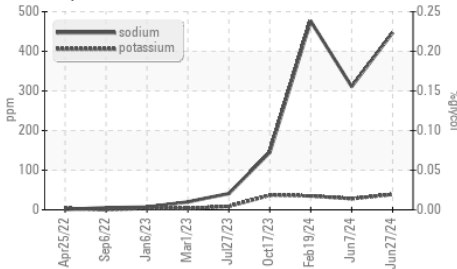


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.4	13.3

### GRAPHS


#### Ferrous Alloys

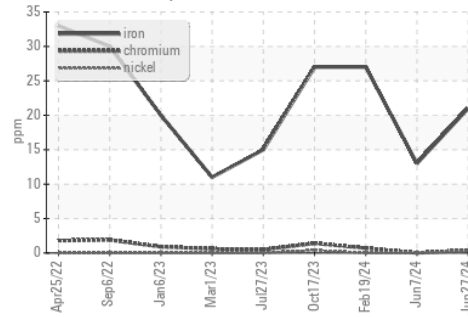


#### Non-ferrous Metals

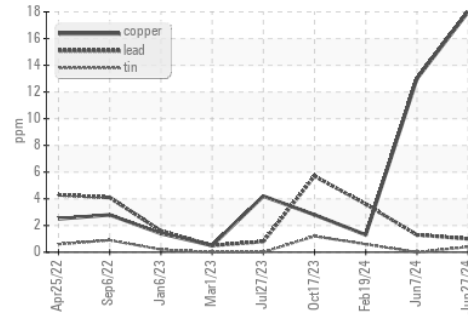

#### Viscosity @ 100°C

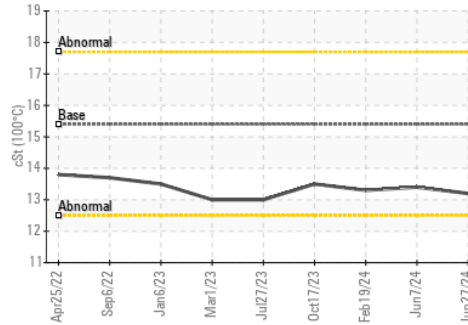

#### Base Number

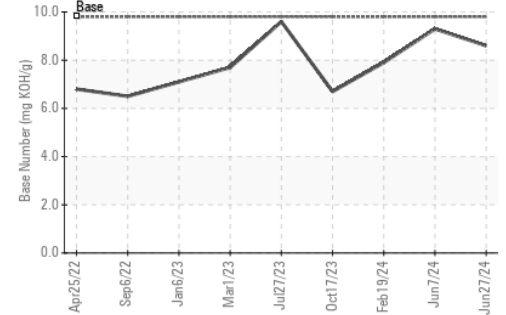

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0122682

Lab Number : 06225665

Unique Number : 11103862

Test Package : FLEET ( Additional Tests: Glycol )

Received : 01 Jul 2024

Tested : 03 Jul 2024

Diagnosed : 03 Jul 2024 - Jonathan Hester

GFL Environmental - 660 - Lynchburg Hauling

2410 Mayflower Drive

Lynchburg, VA

US 24501

Contact: Delbert Beasley

dbeasley@countyrecycling.net

T: (434)665-5998

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)