

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id DT691 Component Diesel Engine Fluid PETRO CANADA DURON SHP 10W30 (36 mls)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0124334	PCA0111622	PCA0101858
Sample Date		Client Info		18 Jun 2024	02 Jan 2024	21 Jul 2023
Machine Age	mls	Client Info		23956	23956	23956
Oil Age	mls	Client Info		23956	23956	23956
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ON	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method	20.2	NEG	NEG	NEG
WEAR METAL	\$	method	limit/base	current	history1	history2
Iron		ASTM D5185m	>110		15	14
-	ppm			25 <1		0
Chromium Nickel	ppm	ASTM D5185m	>4 >2	<1 <1	0	0
	ppm	ASTM D5185m	>2	<1	0	0 <1
Titanium Silver	ppm	ASTM D5185m ASTM D5185m	>2	<1 <1	0	<1
Aluminum	ppm	ASTM D5185m		<1	3	4
	ppm		>25	。 <1	0	4 <1
Lead	ppm			2	1	1
Copper Tin	ppm	ASTM D5185m ASTM D5185m	>85 >4	2 <1	0	0
Vanadium	ppm		>4	<1	0	<1
Cadmium	ppm	ASTM D5185m ASTM D5185m		<1 <1	0	<1
	ppm				-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	3	7	2
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	50	70	63	62
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	950	902	947	916
Calcium	ppm	ASTM D5185m	1050	1124	1157	1124
Phosphorus	ppm	ASTM D5185m	995	905	1056	952
Zinc	ppm	ASTM D5185m	1180	1194	1280	1226
Sulfur	ppm	ASTM D5185m	2600	2328	3080	3168
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	9	7	6
Sodium	ppm	ASTM D5185m		<1	2	2
Potassium	ppm	ASTM D5185m	>20	7	5	7
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.2	8.6	8.9
Nillalion	/ 100/0111					
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	19.9	19.8
	Abs/.1mm		>30 limit/base	20.7 current	19.9 history1	19.8 history2
Sulfation	Abs/.1mm				history1	history2
Sulfation	Abs/.1mm DATION	method	limit/base	current		




OIL ANALYSIS REPORT




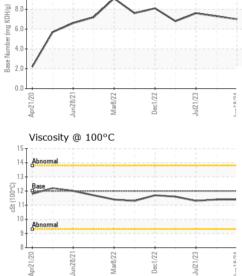

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.4	11.3
GRAPHS						

Ferrous Alloys

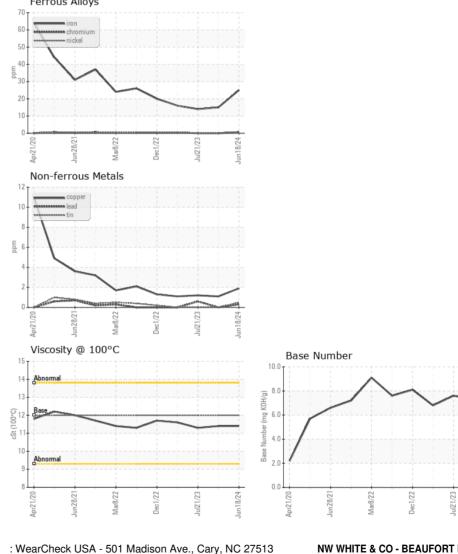

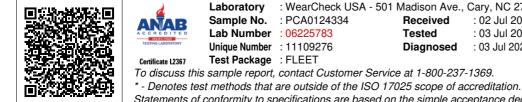

Received : 02 Jul 2024 Tested : 03 Jul 2024 Diagnosed : 03 Jul 2024 - Wes Davis

NW WHITE & CO - BEAUFORT DIVISION 1491 YENMASSEE HIGHWAY VARNVILLE, SC US 29944 Contact: VINCENT BULLOCK bullockvince514@gmail.com T: F:



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: NWWVAR [WUSCAR] 06225783 (Generated: 07/03/2024 05:17:02) Rev: 1

Submitted By: DAVID WEBB

Jun18/24