


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

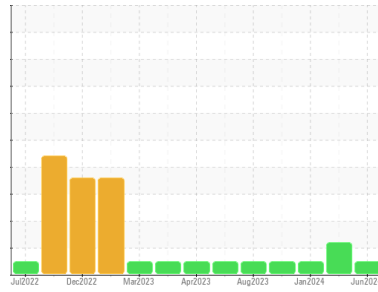

Machine Id  
**SJB712**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0130009</b>	PCA0121022	PCA0113621
Sample Date	Client Info			<b>26 Jun 2024</b>	22 Apr 2024	02 Jan 2024
Machine Age	mls Client Info			<b>196974</b>	188304	0
Oil Age	mls Client Info			<b>8670</b>	12557	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>17</b>	29	30
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	5	3
Lead	ppm	ASTM D5185m	>40	<b>3</b>	4	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>2</b>	1	3
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>69</b>	68	73
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	950	<b>963</b>	948	1058
Calcium	ppm	ASTM D5185m	1050	<b>1141</b>	1210	1360
Phosphorus	ppm	ASTM D5185m	995	<b>1039</b>	1062	1197
Zinc	ppm	ASTM D5185m	1180	<b>1264</b>	1248	1480
Sulfur	ppm	ASTM D5185m	2600	<b>2757</b>	3197	3955

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m		<b>35</b>	88	66
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	27	21

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	1.5	1.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	12.3	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.1</b>	21.9	21.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.2</b>	17.9	16.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.3</b>	8.1	9.8









# OIL ANALYSIS REPORT

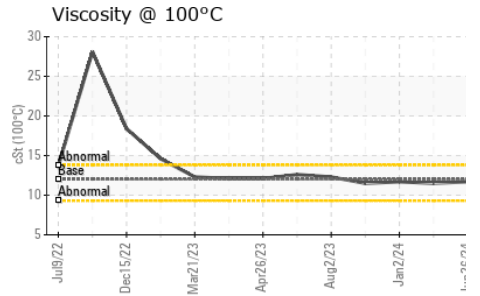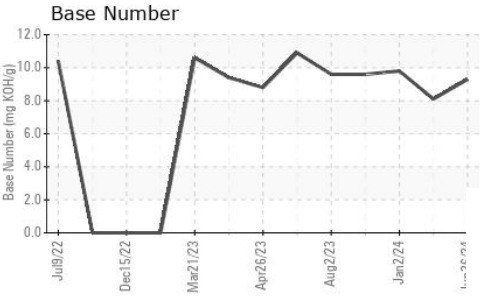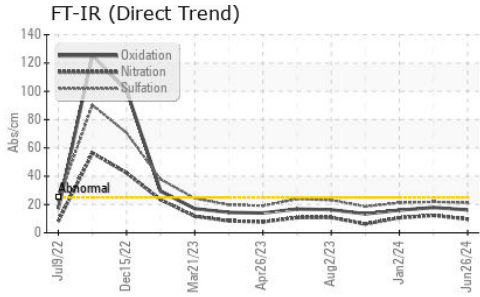

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	11.5

## GRAPHS

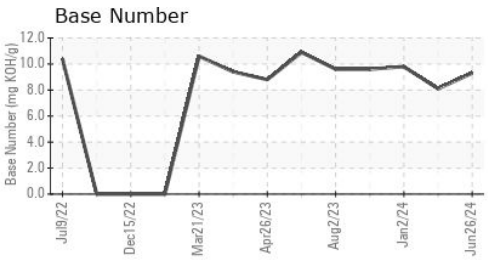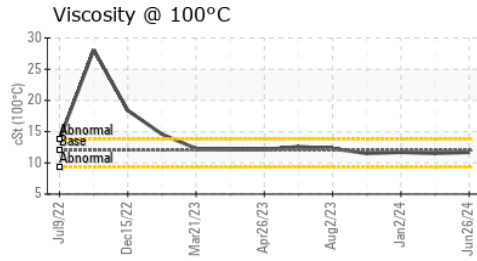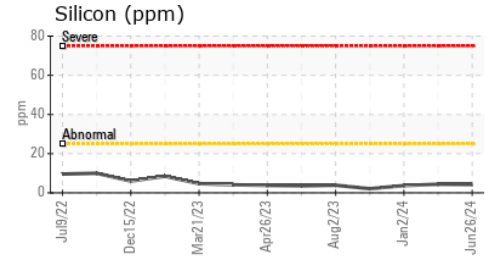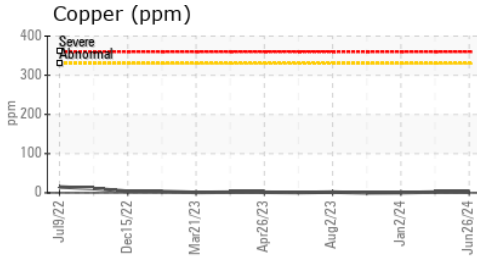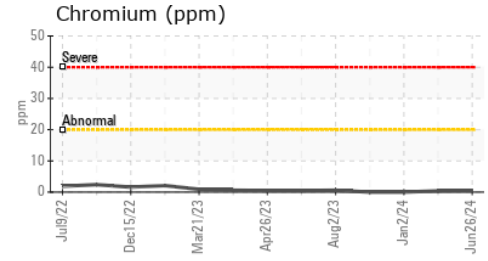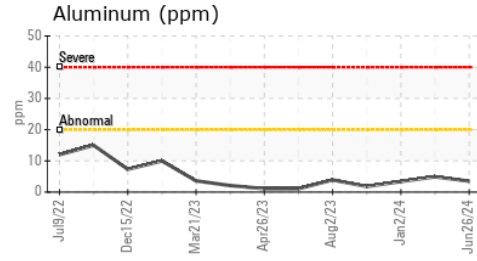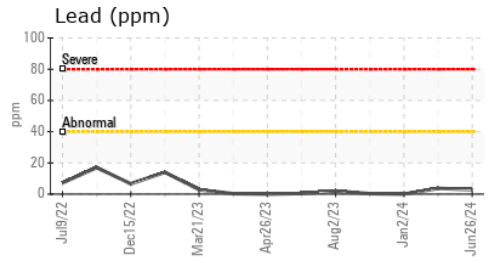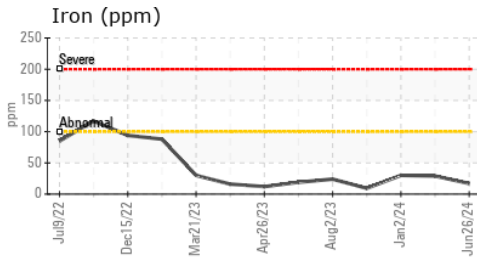

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0130009      **Received** : 02 Jul 2024  
**Lab Number** : 06225980      **Tested** : 03 Jul 2024  
**Unique Number** : 11109473      **Diagnosed** : 03 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)