




# OIL ANALYSIS REPORT

### Sample Rating Trend

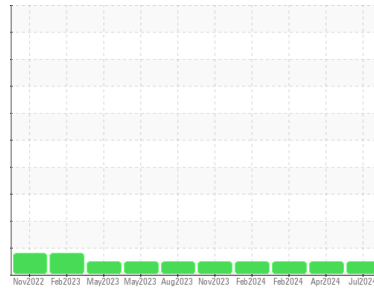

**NORMAL**



Machine Id

**913002**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0070953</b>	GFL0058108	GFL0058091
Sample Date	Client Info		<b>01 Jul 2024</b>	30 Apr 2024	20 Feb 2024
Machine Age	hrs	Client Info	<b>4339</b>	3927	3356
Oil Age	hrs	Client Info	<b>413</b>	571	31
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	13	4
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>1</b>	3	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185m 60	<b>74</b>	80	67
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>1112</b>	1265	1059
Calcium	ppm	ASTM D5185m 1070	<b>1270</b>	1421	1040
Phosphorus	ppm	ASTM D5185m 1150	<b>1146</b>	1440	972
Zinc	ppm	ASTM D5185m 1270	<b>1419</b>	1688	1330
Sulfur	ppm	ASTM D5185m 2060	<b>3041</b>	4232	3252

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	6	3
Sodium	ppm	ASTM D5185m	<b>5</b>	4	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	3

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.6	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	9.2	5.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.5</b>	21.5	18.1


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.3</b>	17.6	14.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.1</b>	7.6	8.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

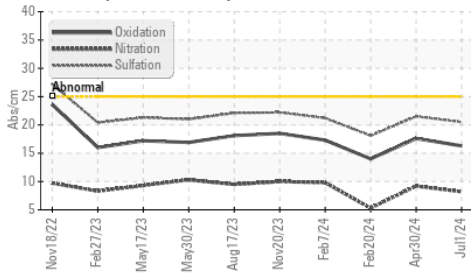

Base Number

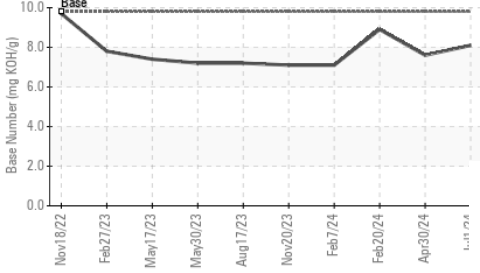

Viscosity @ 100°C

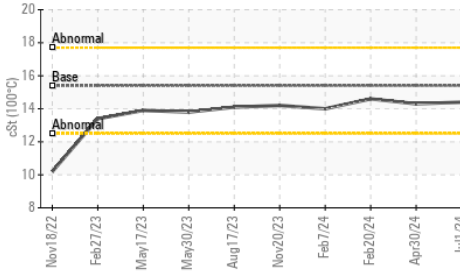


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.3

## GRAPHS


Ferrous Alloys

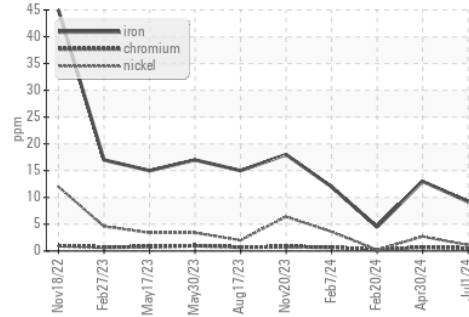


Non-ferrous Metals

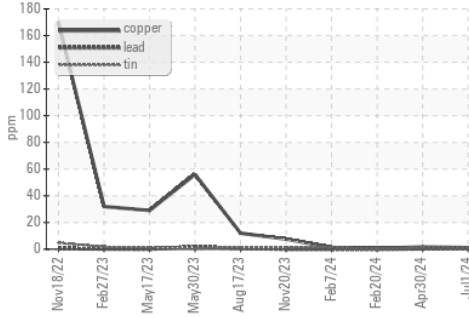

Viscosity @ 100°C

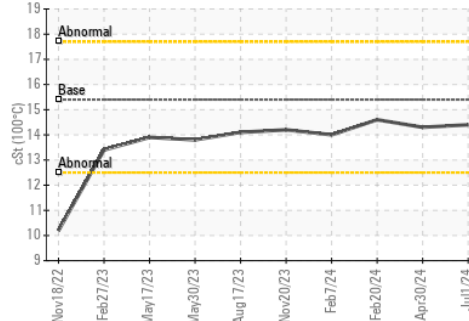

Base Number

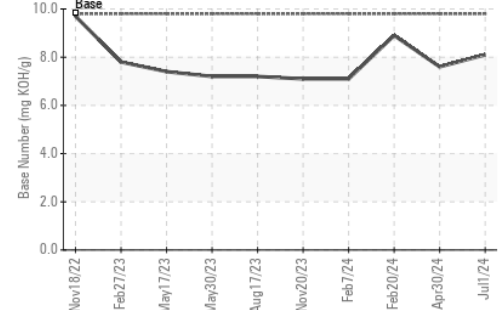

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0070953  
 Lab Number : 06226049  
 Unique Number : 11109542  
 Test Package : FLEET

Received : 02 Jul 2024  
 Tested : 03 Jul 2024  
 Diagnosed : 03 Jul 2024 - Wes Davis

GFL Environmental - 657 - Charlottesville Hauling  
 5498 Richmond Road  
 Troy, VA  
 US 22974

Contact: Brian Ulickas  
 bulickas@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: