OIL ANALYSIS REPORT

OIL DIAGNOSTICS

Area
[66779]
Machine Id
OHT045
Component
Transmission (Manual)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

Sample Rating Trend

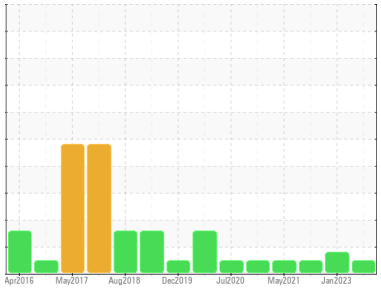

NORMAL

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. (Customer Sample Comment: PM-3 sampled fluid)

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PCA0126273**	PCA0062056	PCA0037523
Sample Date		Client Info		**25 Jun 2024**	18 Jan 2023	14 Apr 2022
Machine Age	hrs	Client Info		**3951**	3426	2905
Oil Age	hrs	Client Info		**3951**	3426	2905
Oil Changed		Client Info		**N/A**	Changed	N/A
Sample Status				**NORMAL**	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**10**	29	7
Chromium	ppm	ASTM D5185m	>5	**2**	2	<1
Nickel	ppm	ASTM D5185m	>5	**0**	<1	<1
Titanium	ppm	ASTM D5185m		**0**	0	<1
Silver	ppm	ASTM D5185m	>7	**<1**	2	<1
Aluminum	ppm	ASTM D5185m	>25	**3**	1	2
Lead	ppm	ASTM D5185m	>45	**3**	11	7
Copper	ppm	ASTM D5185m	>225	**101**	▲ 233	6
Tin	ppm	ASTM D5185m	>10	**1**	4	<1
Antimony	ppm	ASTM D5185m		**---**	---	---
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	**18**	15	2
Barium	ppm	ASTM D5185m	0	**0**	0	0
Molybdenum	ppm	ASTM D5185m	0	**2**	3	3
Manganese	ppm	ASTM D5185m	9	**0**	<1	<1
Magnesium	ppm	ASTM D5185m	1	**19**	25	57
Calcium	ppm	ASTM D5185m	3131	**3006**	2392	3060
Phosphorus	ppm	ASTM D5185m	1194	**981**	783	1058
Zinc	ppm	ASTM D5185m	1281	**1208**	1070	1251
Sulfur	ppm	ASTM D5185m	3811	**3569**	4480	4398

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	**7**	14	12
Sodium	ppm	ASTM D5185m		**5**	29	<1
Potassium	ppm	ASTM D5185m	>20	**2**	<1	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

OIL ANALYSIS REPORT

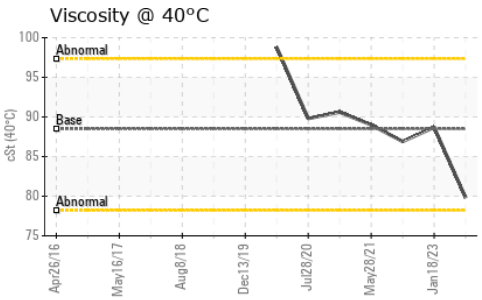

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	88.5	**79.8**	88.7	86.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			*no image*	*no image*	*no image*
Bottom			*no image*	*no image*	*no image*

GRAPHS

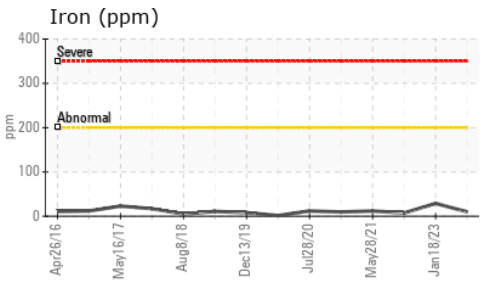

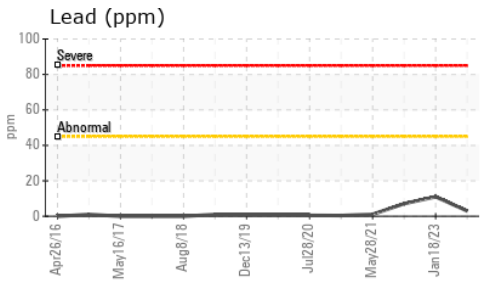

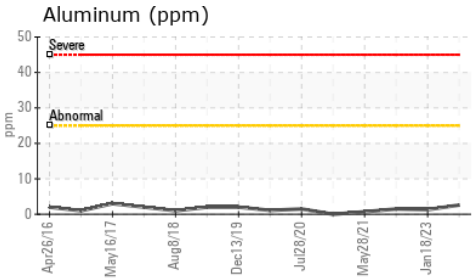

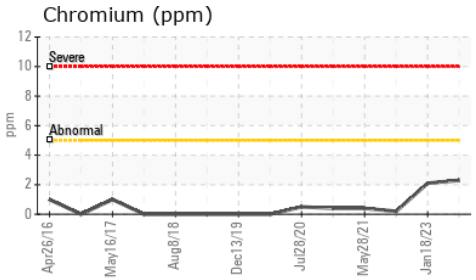

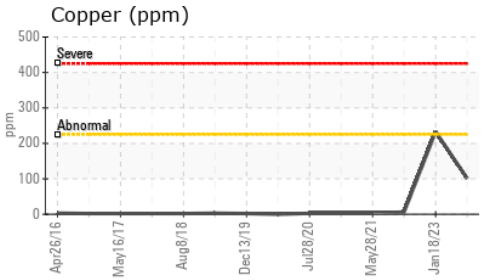

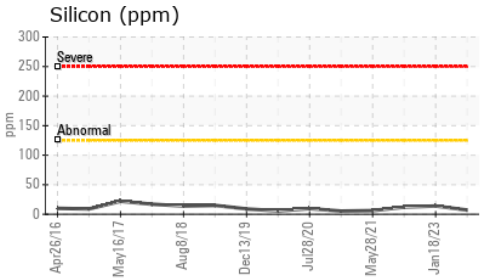

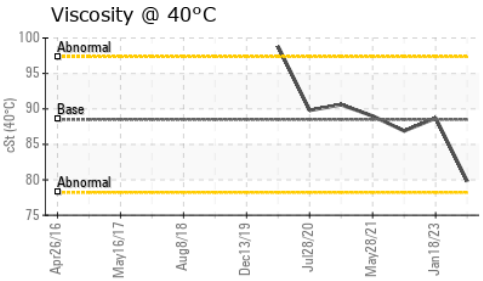

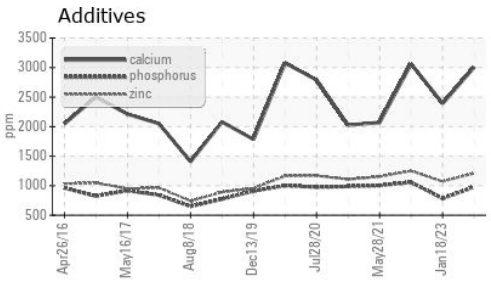

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0126273
Lab Number : 06226680
Unique Number : 11110173
Test Package : MOB 1

Received : 02 Jul 2024
Tested : 05 Jul 2024
Diagnosed : 05 Jul 2024 - Don Baldridge

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Kemp Quarries - Kemp Stone - Neosho
19148 Ingersol Lane
Neosho, MO
US 64850
Contact: NEOSHO NOTIFICATIONS
neosho@kempstone.com
T:
F:

Report Id: KEMNEO [WUSCAR] 06226680 (Generated: 07/05/2024 13:08:54) Rev: 1

Submitted By: