




PROBLEM SUMMARY



Area
 (YA127465)
 Machine Id
2840
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

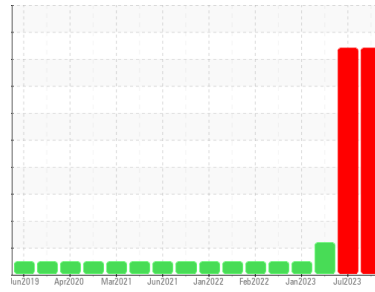


GLYCOL



COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

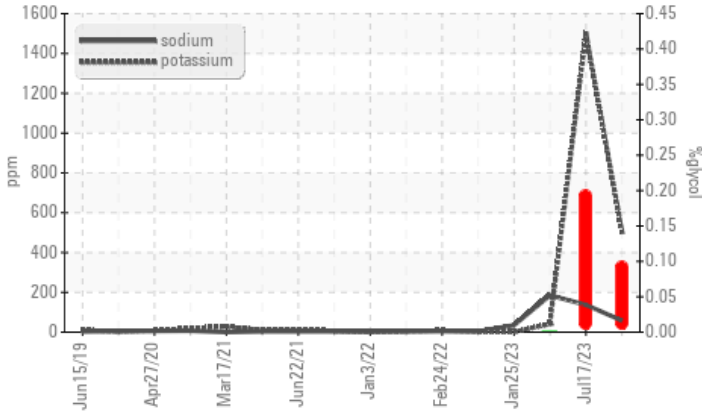

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	ATTENTION
Sodium	ppm	ASTM D5185m	▲ 58	● 137	● 185
Potassium	ppm	ASTM D5185m >20	▲ 508	▲ 1501	41
Glycol	%	*ASTM D2982	▲ 0.10	▲ 0.20	0.0

Customer Id: GFL007
 Sample No.: GFL0123376
 Lab Number: 06227090
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

17 Jul 2023 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



28 Mar 2023 Diag: Doug Bogart

GLYCOL



Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



25 Jan 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT



Area
(YA127465)
 Machine Id
2840
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

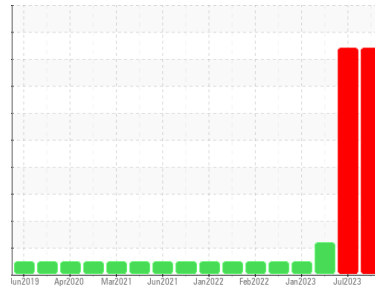

GLYCOL



DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0123376	GFL0082467	GFL0050765
Sample Date	Client Info		27 Jun 2024	17 Jul 2023	28 Mar 2023
Machine Age	hrs	Client Info	248736	18886	18267
Oil Age	hrs	Client Info	248736	584	568
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			SEVERE	SEVERE	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	38	24	18
Chromium	ppm	ASTM D5185m >5	1	1	1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	8	5	6
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >150	6	2	3
Tin	ppm	ASTM D5185m >5	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	7	0	3
Barium	ppm	ASTM D5185m 0	0	0	<1
Molybdenum	ppm	ASTM D5185m 60	55	57	66
Manganese	ppm	ASTM D5185m 0	0	1	<1
Magnesium	ppm	ASTM D5185m 1010	847	750	887
Calcium	ppm	ASTM D5185m 1070	1129	1351	1103
Phosphorus	ppm	ASTM D5185m 1150	991	892	1002
Zinc	ppm	ASTM D5185m 1270	1217	1095	1223
Sulfur	ppm	ASTM D5185m 2060	2839	3377	3050

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	12	6
Sodium	ppm	ASTM D5185m	58	137	185
Potassium	ppm	ASTM D5185m >20	508	1501	41
Glycol	%	*ASTM D2982	0.10	0.20	0.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.3	0.8
Nitration	Abs/cm	*ASTM D7624 >20	7.1	8.2	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.5	20.3	19.7


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.3	15.3	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.2	10.5	9.0




OIL ANALYSIS REPORT


▲ Glycol Contamination

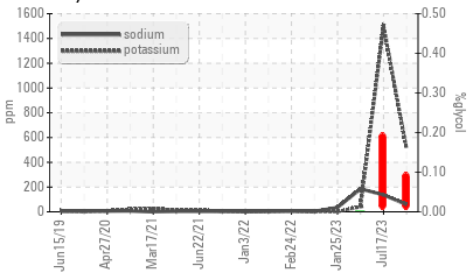


FT-IR (Direct Trend)

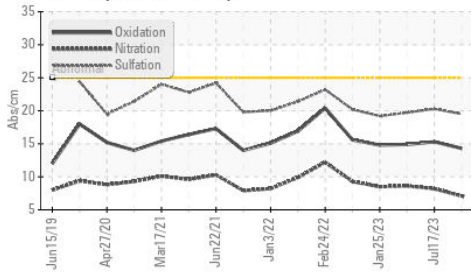


Base Number

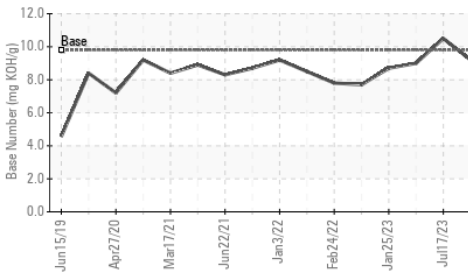

Viscosity @ 100°C

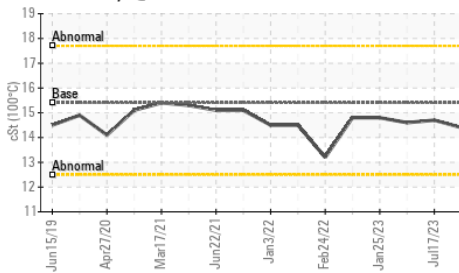

Viscosity @ 100°C

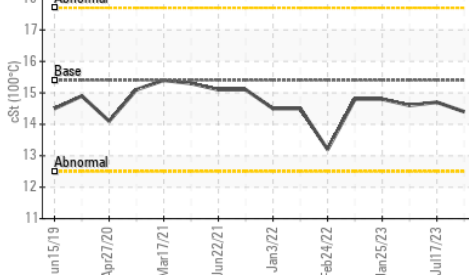


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.7

GRAPHS


Ferrous Alloys

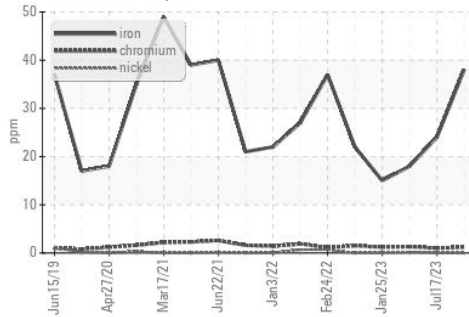

Non-ferrous Metals

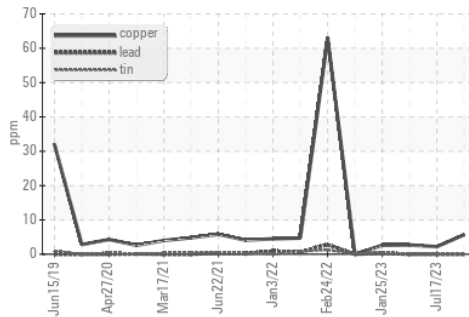

Base Number

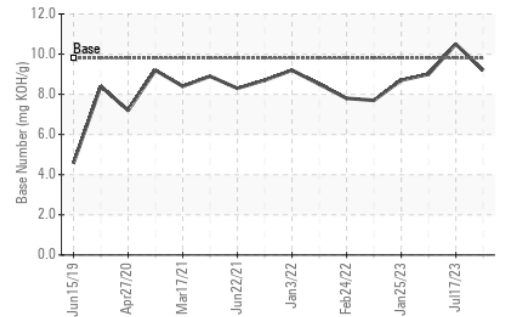

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0123376
 Lab Number : 06227090
 Unique Number : 11110583
 Test Package : FLEET

Received : 03 Jul 2024
 Tested : 05 Jul 2024
 Diagnosed : 05 Jul 2024 - Jonathan Hester

GFL Environmental - 007 - Brunswick
 2809 Galloway Road
 Bolivia, NC
 US 28422
 Contact: DONALD CRAVEN
 dcraven@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)253-4179