




# OIL ANALYSIS REPORT

Sample Rating Trend

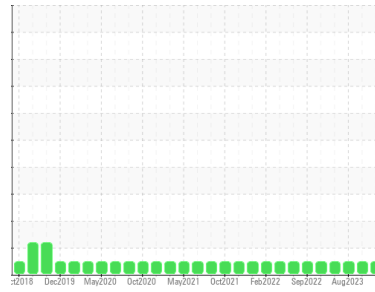

**NORMAL**



Area  
**(67953P)**  
 Machine Id  
**10885**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0125397</b>	GFL0093771	GFL0079024
Sample Date	Client Info		<b>28 Jun 2024</b>	08 Feb 2024	23 Aug 2023
Machine Age	hrs	Client Info	<b>73890</b>	10387	9582
Oil Age	hrs	Client Info	<b>73890</b>	73890	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>50</b>	22	23
Chromium	ppm	ASTM D5185m >5	<b>2</b>	4	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >15	<b>5</b>	2	2
Lead	ppm	ASTM D5185m >25	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	5	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	3
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	54	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>898</b>	842	967
Calcium	ppm	ASTM D5185m 1070	<b>1073</b>	943	1088
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	911	1077
Zinc	ppm	ASTM D5185m 1270	<b>1253</b>	1105	1280
Sulfur	ppm	ASTM D5185m 2060	<b>3279</b>	3163	3273

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	14	9
Sodium	ppm	ASTM D5185m	<b>13</b>	13	10
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>1.1</b>	0.2	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	5.9	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.2</b>	18.2	20.2


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	13.6	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	8.3	8.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

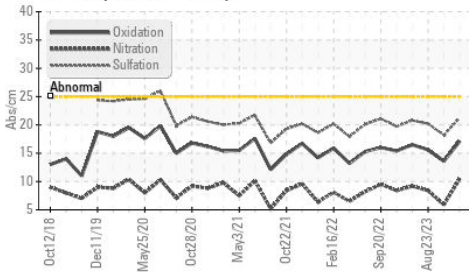

Base Number

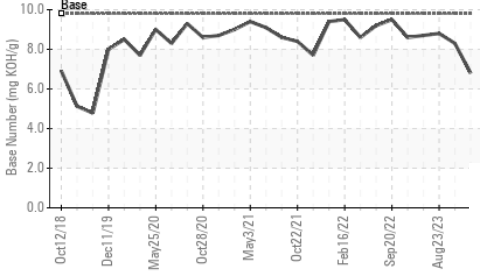

Viscosity @ 100°C

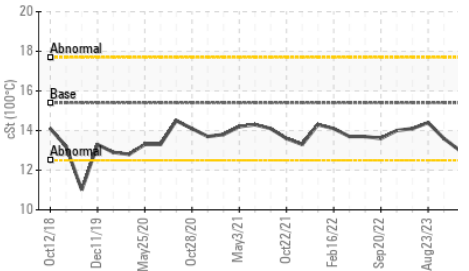


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.0	13.6

## GRAPHS


Ferrous Alloys

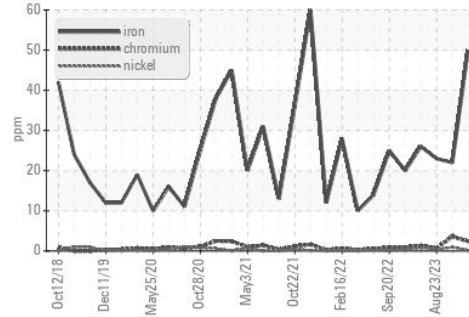


Non-ferrous Metals

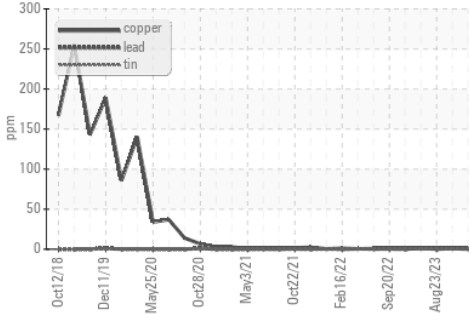

Viscosity @ 100°C

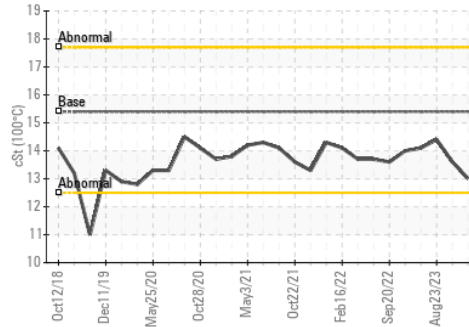

Base Number

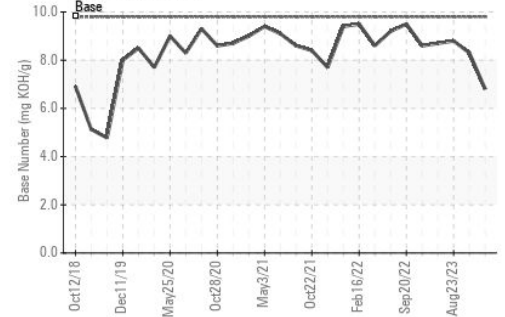

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0125397  
**Lab Number** : 06227256  
**Unique Number** : 11110749  
**Test Package** : FLEET

**Received** : 03 Jul 2024  
**Tested** : 05 Jul 2024  
**Diagnosed** : 05 Jul 2024 - Wes Davis

**GFL Environmental - 029 - Wytheville**  
 2390 North 4th Street  
 Wytheville, VA  
 US 24382

Contact: CHARLES CORVIN  
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (276)223-4476

F: (276)223-1283