

OIL ANALYSIS REPORT

Area **PROCESS CHEESE [99142378]** Machine Id **SODIUM HYDROXIDE BAY (S/N UP900137)** Component

Pump Fluid ISO 68 (1 LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.




| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|-----------------|-------|--------------|------------|-------------------|-------------------|----------|
| Sample Number | | Client Info | | PCA0130494 | PCA0114282 | |
| Sample Date | | Client Info | | 25 Jun 2024 | 21 Jan 2024 | |
| | mths | Client Info | | 24 | 0 | |
| Ũ | mths | Client Info | | 1 | 0 | |
| Oil Changed | | Client Info | | N/A | Changed | |
| Sample Status | | | | ABNORMAL | ABNORMAL | |
| CONTAMINATIO |)NI | method | limit/base | current | history1 | history2 |
| Water | | WC Method | | NEG | NEG | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| | | | >90 | 0 | 0 | |
| | opm | | | - | | |
| | opm | ASTM D5185m | >5 | 0 | <1 | |
| | opm | ASTM D5185m | >5 | 0 | 0 | |
| | opm | ASTM D5185m | >3 | 0 | <1 | |
| | opm | ASTM D5185m | >3 | 0 | 0 | |
| | opm | ASTM D5185m | >7 | 0 | 2 | |
| | opm | ASTM D5185m | >12 | 0 | 0 | |
| Copper p | opm | ASTM D5185m | >30 | 0 | <1 | |
| ۳ Fin | opm | ASTM D5185m | >9 | 0 | <1 | |
| Vanadium p | opm | ASTM D5185m | | 0 | 0 | |
| Cadmium p | opm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron p | opm | ASTM D5185m | | 0 | 0 | |
| Barium p | opm | ASTM D5185m | | 0 | 0 | |
| Molybdenum | opm | ASTM D5185m | | 0 | <1 | |
| | opm | ASTM D5185m | | 0 | 0 | |
| | opm | ASTM D5185m | | <1 | 0 | |
| • | opm | ASTM D5185m | | 0 | 1 | |
| | opm | ASTM D5185m | | 158 | 496 | |
| | opm | ASTM D5185m | | 0 | 0 | |
| | | ASTM D5185m | | 151 | 1386 | |
| , | opm | | | - | | |
| CONTAMINANT | S | method | limit/base | current | history1 | history2 |
| | opm | ASTM D5185m | >60 | 2 | 2 | |
| | opm | ASTM D5185m | | <1 | 0 | |
| Potassium p | opm | ASTM D5185m | >20 | 0 | 2 | |
| FLUID CLEANLI | NESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >1300 | 6 5728 | 2 9838 | |
| Particles >6µm | | ASTM D7647 | >320 | <u> </u> | ▲ 5690 | |
| Particles >14µm | | ASTM D7647 | >80 | 24 | 41 | |
| Particles >21µm | | ASTM D7647 | >20 | 4 | 5 | |
| Particles >38µm | | ASTM D7647 | >4 | 1 | 0 | |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | |
| Oil Cleanliness | | ISO 4406 (c) | >17/15/13 | A 20/18/12 | A 22/20/13 | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| | | ASTM D8045 | | 0.44 | 0.28 | |
| ·32·05) Boy: 1 | 3 | 2 | Co | | Service Manager | |


Report Id: KRASPRMO [WUSCAR] 06227386 (Generated: 07/08/2024 09:32:05) Rev: 1

Contact/Location: Service Manager - KRASPRMO Page 1 of 2



OIL ANALYSIS REPORT

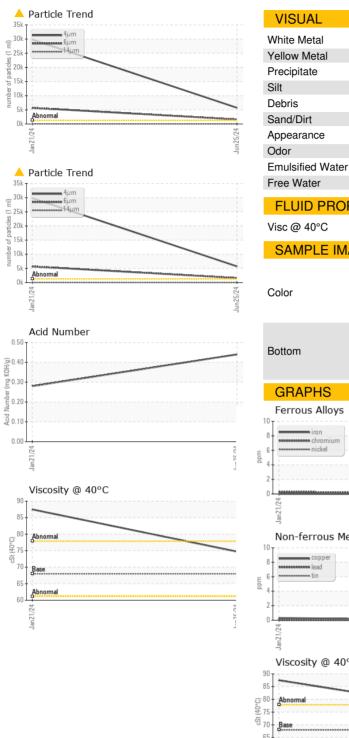

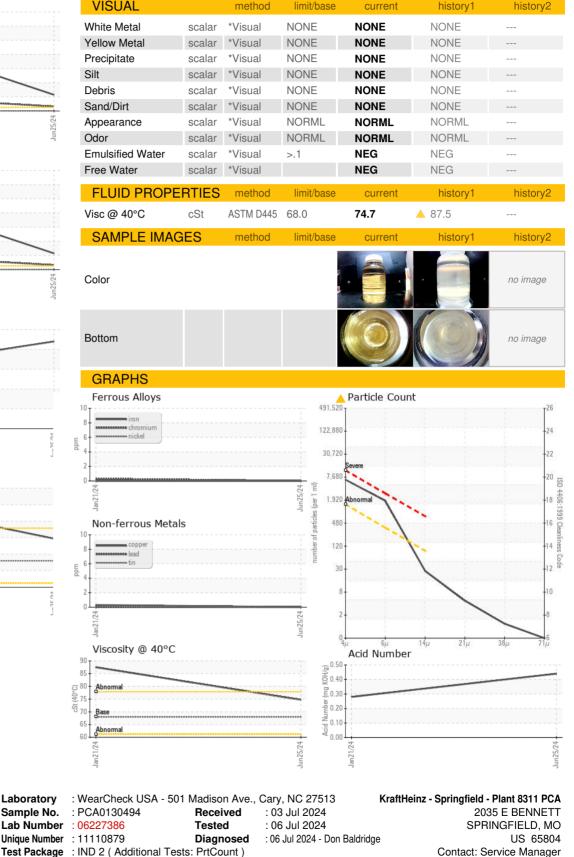

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

60

Laboratory

Sample No.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KRASPRMO [WUSCAR] 06227386 (Generated: 07/08/2024 09:32:05) Rev: 1

Certificate 12367

Contact/Location: Service Manager - KRASPRMO

T:

F: