




PROBLEM SUMMARY

Sample Rating Trend

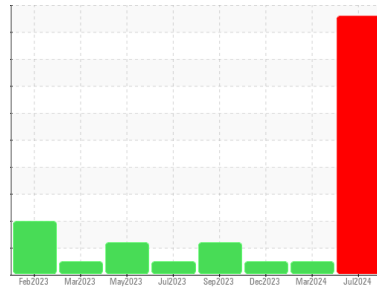


GLYCOL



Machine Id
413018
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

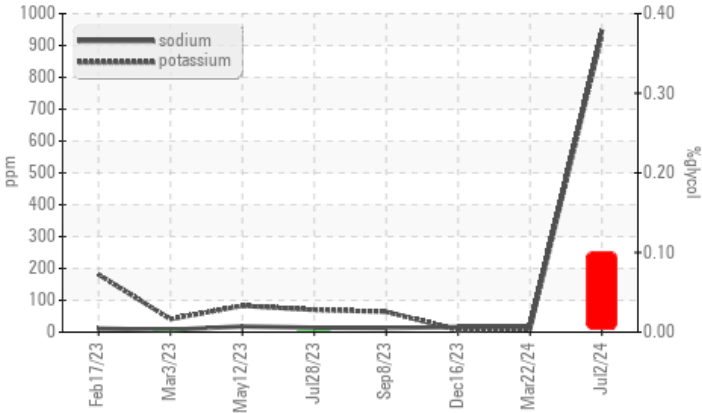

RECOMMENDATION

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We advise an early resample to confirm this situation. NOTE: High contamination in the sample has limited the accuracy of Infra-Red data including Total Base Number (TBN) value. NOTE: one of five samples received with nearly the same data, indicating sample came from same source or unit.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	NORMAL
Potassium	ppm	ASTM D5185m	>20	▲ 932	10
Glycol	%	*ASTM D2982		▲ 0.10	NEG

Customer Id: GFL882
 Sample No.: GFL0119150
 Lab Number: 06228319
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We advise an early resample to confirm this situation.
Alert	---	---	?	NOTE: one of two samples received with same ID and sampling date. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

NORMAL



22 Mar 2024 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



NORMAL



16 Dec 2023 Diag: Sean Felton

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



GLYCOL



08 Sep 2023 Diag: Don Baldrige

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

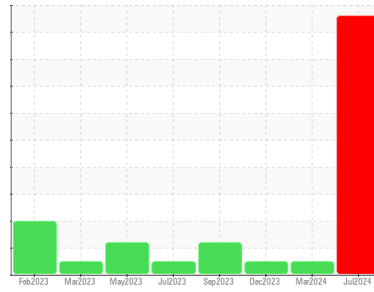

GLYCOL



Machine Id
413018
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We advise an early resample to confirm this situation. NOTE: High contamination in the sample has limited the accuracy of Infra-Red data including Total Base Number (TBN) value. NOTE: one of five samples received with nearly the same data, indicating sample came from same source or unit.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

● Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0119150	GFL0115490	GFL0106974
Sample Date	Client Info		02 Jul 2024	22 Mar 2024	16 Dec 2023
Machine Age	hrs	Client Info	4399	3489	2771
Oil Age	hrs	Client Info	910	718	731
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			SEVERE	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	12	21	20
Chromium	ppm	ASTM D5185m >20	<1	0	<1
Nickel	ppm	ASTM D5185m >5	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	2	<1
Lead	ppm	ASTM D5185m >40	0	1	2
Copper	ppm	ASTM D5185m >330	10	<1	<1
Tin	ppm	ASTM D5185m >15	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	4	1
Barium	ppm	ASTM D5185m 0	<1	0	0
Molybdenum	ppm	ASTM D5185m 60	123	59	56
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	952	888	821
Calcium	ppm	ASTM D5185m 1070	1120	1058	1004
Phosphorus	ppm	ASTM D5185m 1150	1063	1051	895
Zinc	ppm	ASTM D5185m 1270	1333	1247	1111
Sulfur	ppm	ASTM D5185m 2060	3863	3438	2746

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	3	3
Sodium	ppm	ASTM D5185m	948	17	16
Potassium	ppm	ASTM D5185m >20	932	10	7
Glycol	%	*ASTM D2982	0.10	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.3	1.5	1.4
Nitration	Abs/cm	*ASTM D7624 >20	12.8	10.3	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.6	20.5	20.8


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.1	16.5	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	17.1	8.7	8.7




OIL ANALYSIS REPORT


▲ Glycol Contamination

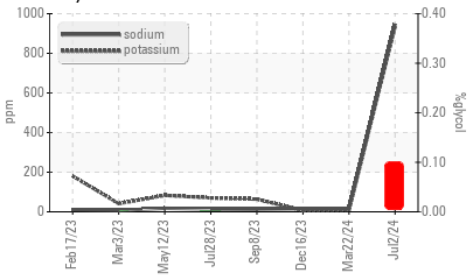


↗ FT-IR (Direct Trend)

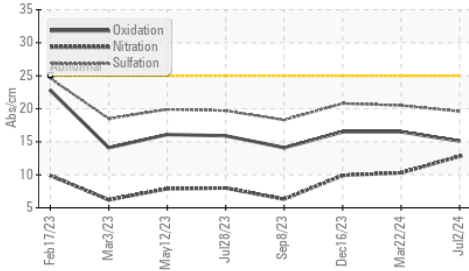

↗ FT-IR (Direct Trend)

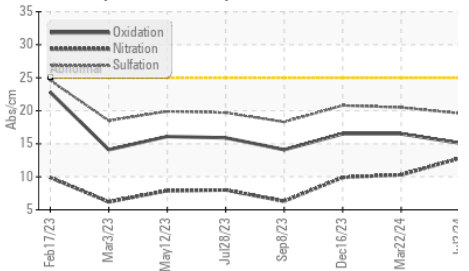

Viscosity @ 100°C

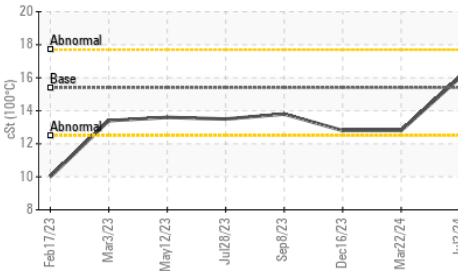

VISUAL


method	limit/base	current	history1	history2
White Metal	*Visual	NONE	NONE	NONE
Yellow Metal	*Visual	NONE	NONE	NONE
Precipitate	*Visual	NONE	NONE	NONE
Silt	*Visual	NONE	NONE	NONE
Debris	*Visual	NONE	NONE	NONE
Sand/Dirt	*Visual	NONE	NONE	NONE
Appearance	*Visual	NORML	NORML	NORML
Odor	*Visual	NORML	NORML	NORML
Emulsified Water	*Visual	>0.2	NEG	NEG
Free Water	*Visual	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	ASTM D445	15.4	16.0	12.8

GRAPHS


Ferrous Alloys

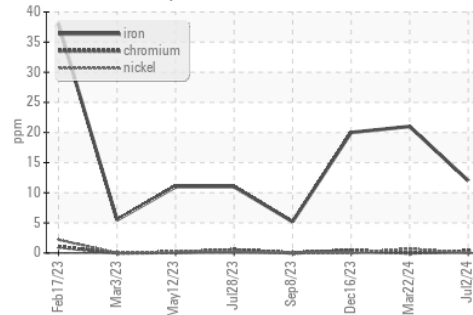


Non-ferrous Metals

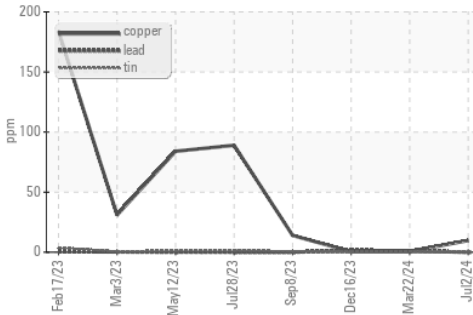

Viscosity @ 100°C

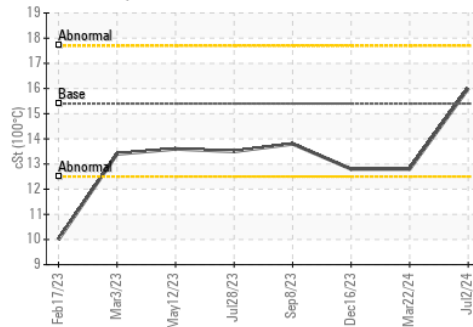

● Base Number

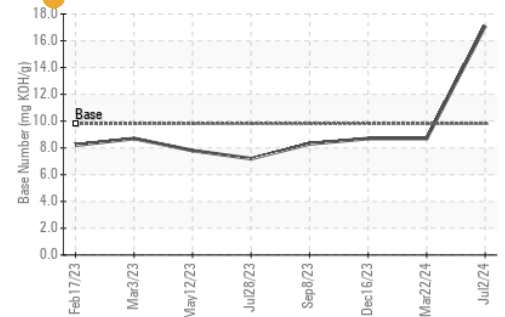

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0119150

Lab Number : 06228319

Unique Number : 11111812

Test Package : FLEET (Additional Tests: Glycol)

Received : 05 Jul 2024

Tested : 09 Jul 2024

Diagnosed : 09 Jul 2024 - Doug Bogart

GFL Environmental - 882 - Gainesville

5002 SW 41st Blvd

Gainesville, FL

US 32608

Contact: ROBERT CLARK

robert.clark@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)