




# PROBLEM SUMMARY

Machine Id  
**729036-361501**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

Sample Rating Trend

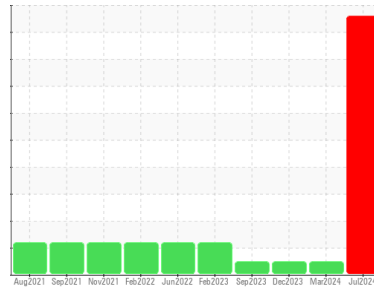


GLYCOL



## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

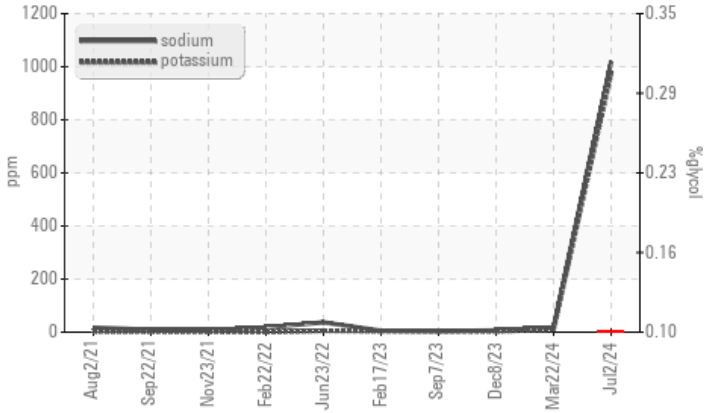

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We advise an early resample to confirm this situation. NOTE: High contamination in the sample has limited the accuracy of Infra-Red data including Total Base Number (TBN) value. NOTE: one of five samples received with nearly the same data, indicating sample came from same source or unit.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Potassium	ppm	ASTM D5185m	>20	▲ 974	10	3
Glycol	%	*ASTM D2982		▲ 0.10	NEG	NEG

Customer Id: GFL882  
Sample No.: GFL0119148  
Lab Number: 06228321  
Test Package: FLEET



To manage this report scan the QR code







To discuss the diagnosis or test data:  
Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We advise an early resample to confirm this situation.
Alert	---	---	?	NOTE: one of two samples received with same ID and sampling date. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.


## HISTORICAL DIAGNOSIS

<p><b>NORMAL</b></p> 	<p><b>22 Mar 2024 Diag: Wes Davis</b> Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.</p>	<p>view report</p> 
<p><b>NORMAL</b></p> 	<p><b>08 Dec 2023 Diag: Don Baldrige</b> Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.</p>	<p>view report</p> 
<p><b>NORMAL</b></p> 	<p><b>07 Sep 2023 Diag: Don Baldrige</b> Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.</p>	<p>view report</p> 



# OIL ANALYSIS REPORT

Sample Rating Trend

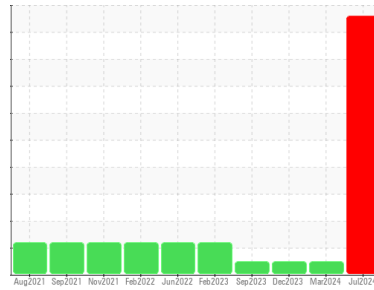

GLYCOL



Machine Id  
**729036-361501**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We advise an early resample to confirm this situation. NOTE: High contamination in the sample has limited the accuracy of Infra-Red data including Total Base Number (TBN) value. NOTE: one of five samples received with nearly the same data, indicating sample came from same source or unit.

### Wear

All component wear rates are normal.

### ▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

### ● Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0119148</b>	GFL0115488	GFL0094232
Sample Date	Client Info	<b>02 Jul 2024</b>	22 Mar 2024	08 Dec 2023
Machine Age	hrs	Client Info	27189	26680
Oil Age	hrs	Client Info	509	372
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>SEVERE</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>12</b>	21	6
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm ASTM D5185m >40	<b>0</b>	2	<1
Copper	ppm ASTM D5185m >330	<b>10</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>2</b>	4	32
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	11
Molybdenum	ppm ASTM D5185m 60	<b>122</b>	59	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>897</b>	885	696
Calcium	ppm ASTM D5185m 1070	<b>1092</b>	1069	1835
Phosphorus	ppm ASTM D5185m 1150	<b>1035</b>	1056	948
Zinc	ppm ASTM D5185m 1270	<b>1255</b>	1251	1161
Sulfur	ppm ASTM D5185m 2060	<b>3633</b>	3430	3356

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	3	4
Sodium	ppm ASTM D5185m	<b>1019</b>	18	7
Potassium	ppm ASTM D5185m >20	<b>974</b>	10	3
Glycol	% *ASTM D2982	<b>0.10</b>	NEG	NEG

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	1.5	0
Nitration	Abs/cm *ASTM D7624 >20	<b>12.8</b>	10.4	8.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.6</b>	20.6	18.4


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	16.6	15.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>17.2</b>	8.7	6.7




# OIL ANALYSIS REPORT


### ▲ Glycol Contamination

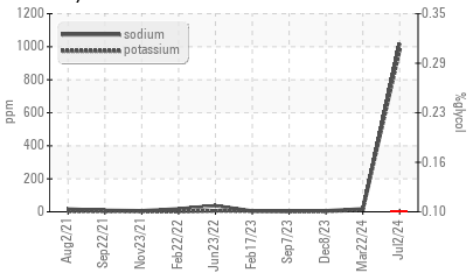


### ↗ FT-IR (Direct Trend)

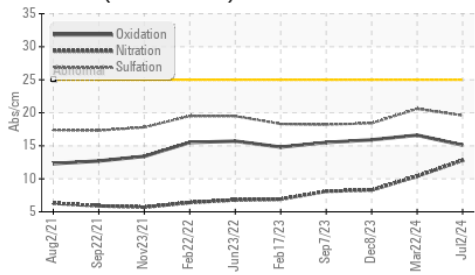

### ↗ FT-IR (Direct Trend)

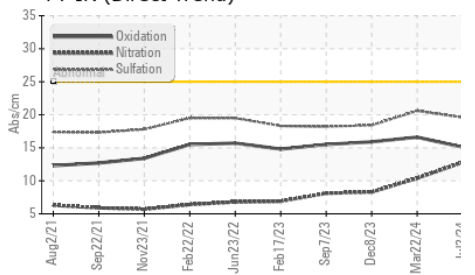

### Viscosity @ 100°C

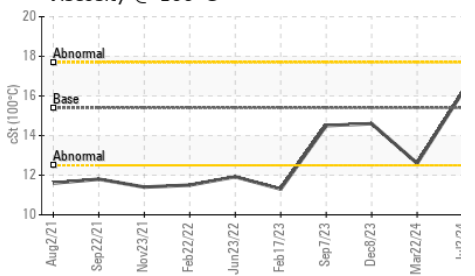


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	16.2	12.6	14.6

### GRAPHS


#### Ferrous Alloys

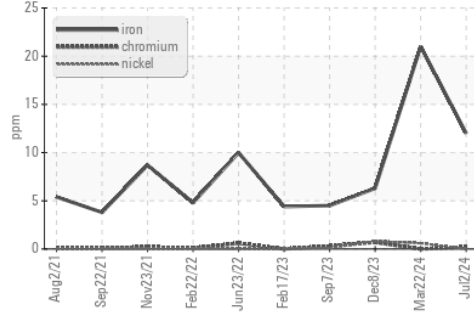


#### Non-ferrous Metals

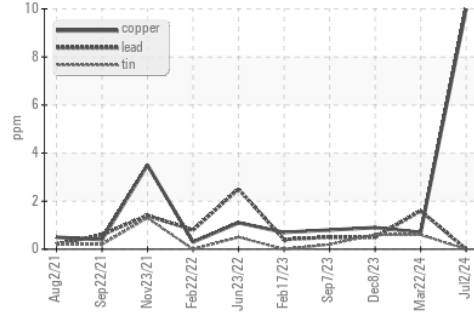

#### Viscosity @ 100°C

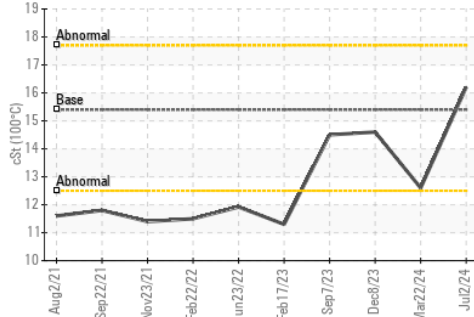

#### ● Base Number

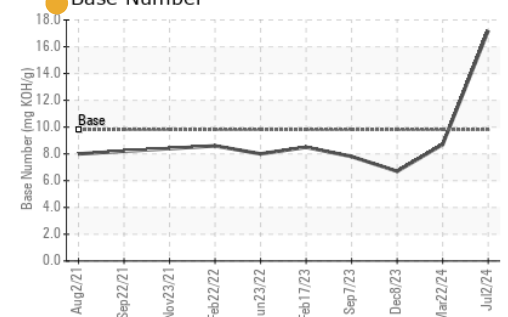

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119148      **Received** : 05 Jul 2024  
**Lab Number** : 06228321      **Tested** : 09 Jul 2024  
**Unique Number** : 11111814      **Diagnosed** : 09 Jul 2024 - Doug Bogart  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 882 - Gainesville**  
 5002 SW 41st Blvd  
 Gainesville, FL  
 US 32608  
 Contact: ROBERT CLARK  
 robert.clark@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)