


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

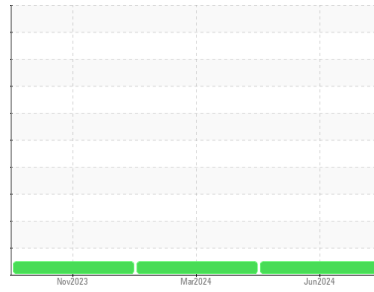

Area  
**(P922180) Preferred Service-Tractor**  
 Machine ID  
**[Preferred Service-Tractor] 192A01004**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (36 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0126895</b>	PCA0116681	PCA0109409
Sample Date	Client Info			<b>30 Jun 2024</b>	05 Mar 2024	01 Nov 2023
Machine Age	mls	Client Info		<b>535974</b>	520890	501261
Oil Age	mls	Client Info		<b>15084</b>	19629	18235
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>25</b>	34	39
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	2	2
Copper	ppm	ASTM D5185m	>330	<b>6</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	<1




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>6</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>62</b>	64	73
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>946</b>	1006	1127
Calcium	ppm	ASTM D5185m	1050	<b>1112</b>	1118	1252
Phosphorus	ppm	ASTM D5185m	995	<b>962</b>	1141	1196
Zinc	ppm	ASTM D5185m	1180	<b>1141</b>	1286	1450
Sulfur	ppm	ASTM D5185m	2600	<b>2888</b>	3126	3091

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	5	5
Sodium	ppm	ASTM D5185m		<b>10</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.4</b>	1	1.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	9.3	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	21.8	22.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	18.5	17.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.0</b>	6.2	7.0





# OIL ANALYSIS REPORT

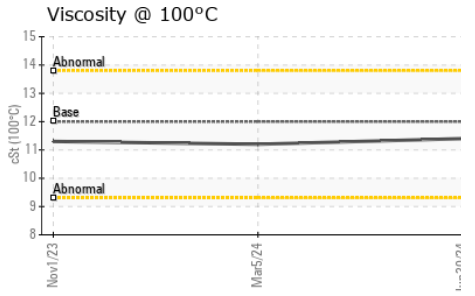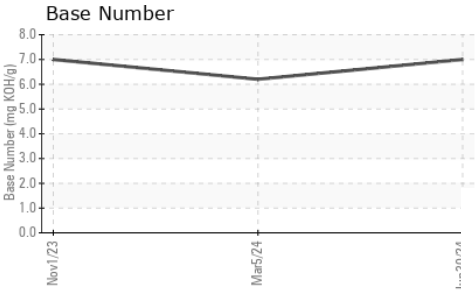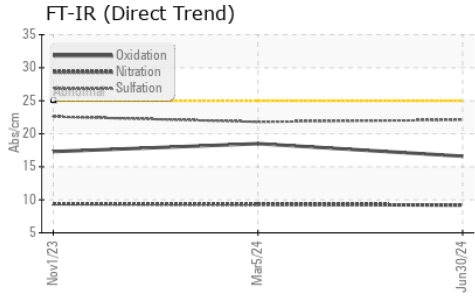

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.2

## GRAPHS

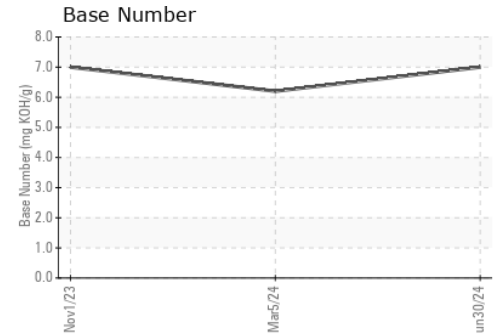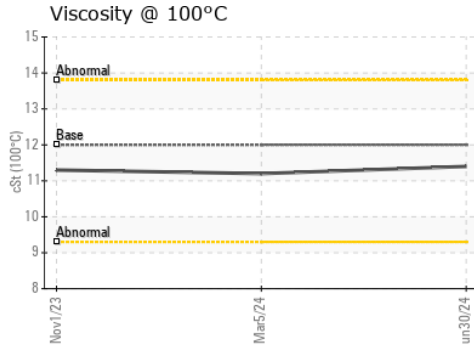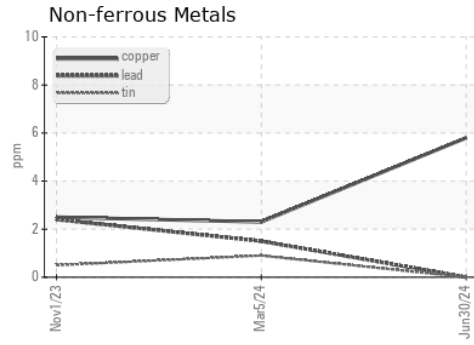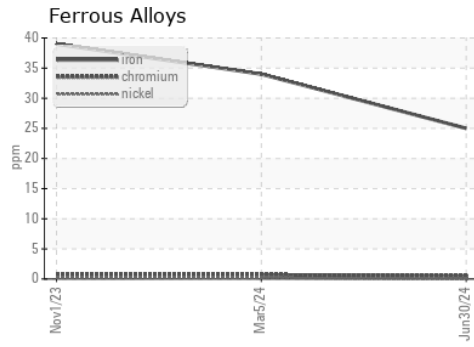

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0126895  
**Lab Number** : 06228347  
**Unique Number** : 11111840  
**Test Package** : FLEET

**Received** : 05 Jul 2024  
**Tested** : 08 Jul 2024  
**Diagnosed** : 08 Jul 2024 - Wes Davis

**Transervice - Shop 1920 - Preferred Service**  
 1955 W. North Avenue, Bldg K  
 Melrose Park, IL  
 US 60160

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Tom Lindeman  
 tlindemann@transervice.com  
 T: (630)376-8946  
 F: