




# OIL ANALYSIS REPORT

## Sample Rating Trend

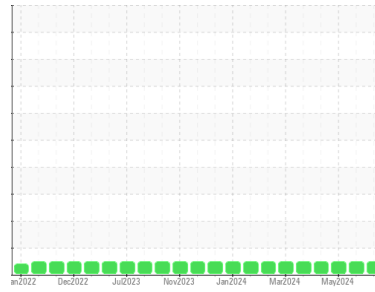

**NORMAL**



Machine Id

**812033**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- Shots)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>GFL0122562</b>  | GFL0117928  | GFL0117940  |
| Sample Date        | Client Info |             |            | <b>03 Jul 2024</b> | 13 Jun 2024 | 24 May 2024 |
| Machine Age        | hrs         | Client Info |            | <b>6260</b>        | 6128        | 5993        |
| Oil Age            | hrs         | Client Info |            | <b>520</b>         | 0           | 253         |
| Oil Changed        | Client Info |             |            | <b>Not Chngd</b>   | N/A         | Not Chngd   |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>3</b>     | 5        | 3        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | 0        |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Silver      | ppm | ASTM D5185m | >3         | <b>&lt;1</b> | 0        | <1       |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>3</b>     | 3        | 4        |
| Lead        | ppm | ASTM D5185m | >40        | <b>0</b>     | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>2</b>     | 1        | <1       |
| Tin         | ppm | ASTM D5185m | >15        | <b>0</b>     | <1       | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 250        | <b>2</b>     | <1       | 2        |
| Barium     | ppm | ASTM D5185m | 10         | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 100        | <b>62</b>    | 56       | 61       |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | <1       |
| Magnesium  | ppm | ASTM D5185m | 450        | <b>964</b>   | 957      | 994      |
| Calcium    | ppm | ASTM D5185m | 3000       | <b>1144</b>  | 1089     | 1099     |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>881</b>   | 817      | 1078     |
| Zinc       | ppm | ASTM D5185m | 1350       | <b>1083</b>  | 1115     | 1276     |
| Sulfur     | ppm | ASTM D5185m | 4250       | <b>2848</b>  | 2860     | 3549     |




| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>6</b> | 21       | 4        |
| Sodium       | ppm | ASTM D5185m | >158       | <b>4</b> | <1       | 1        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | 3        | 3        |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.3</b>  | 0.2      | 0.2      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>7.4</b>  | 7.0      | 6.3      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>19.6</b> | 19.8     | 18.3     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>15.3</b> | 15.9     | 13.8     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 8.5        | <b>7.9</b>  | 8.1      | 8.5      |







# OIL ANALYSIS REPORT

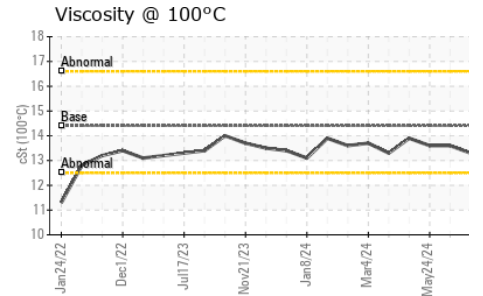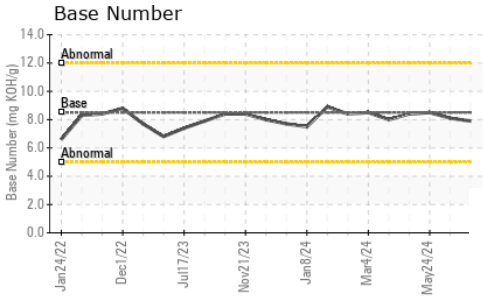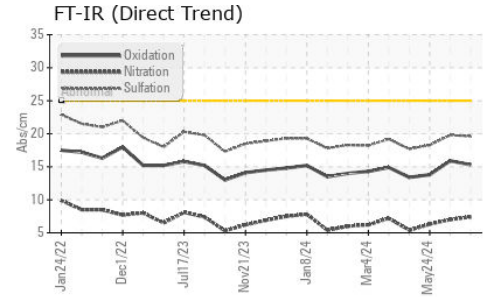

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | 13.3     | 13.6     |

## GRAPHS

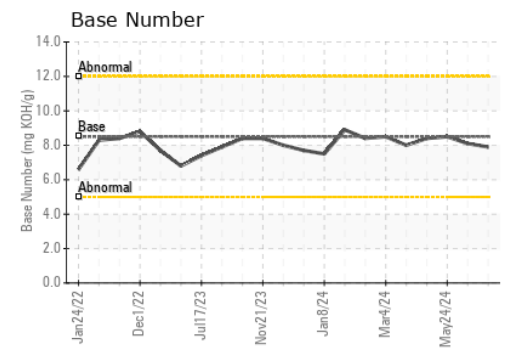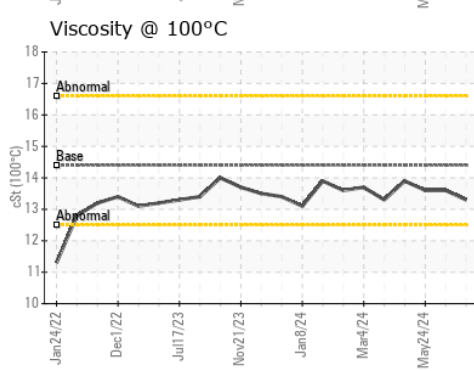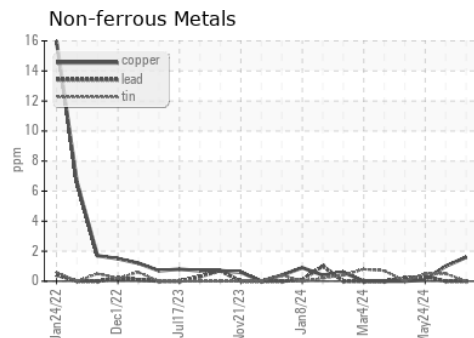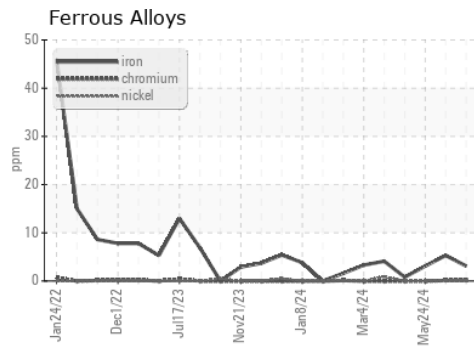

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122562  
**Lab Number** : 06228405  
**Unique Number** : 11111898  
**Test Package** : FLEET

**GFL Environmental - 892 - Pauls Valley Hauling**  
 1910 S CHICKASAW STREET  
 Pauls Valley, OK  
 US 73075

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Tony Graham  
tgraham2@wcamerica.com

T:  
F: