


PROBLEM SUMMARY

Area
STUFF ROOM E [99031153]
 Machine Id
KR-GR-003484 - AGITATOR (S/N STUFF E - 11513146)
 Component
Gearbox
 Fluid
SCHAEFFER 293A SUPREME GEAR LUBE NO TACK 220 (--- GAL)

Sample Rating Trend

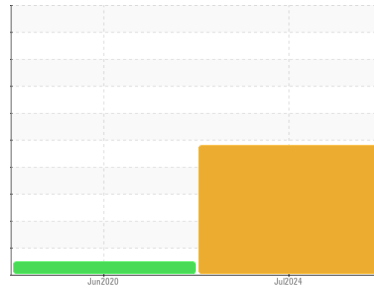

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

We advise that you check for the source of water entry. We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition. (Customer Sample Comment: 99031153)

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	---
Free Water	scalar	*Visual	▲ >10%	NEG	---

Customer Id: KRAKIR
 Sample No.: PCA0128829
 Lab Number: 06228497
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Water Drain-off	---	---	?	We advise that you follow the water drain-off procedure for this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Water Access	---	---	?	We advise that you check for the source of water entry.

HISTORICAL DIAGNOSIS

NORMAL



29 Jun 2020 Diag: Wes Davis


Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

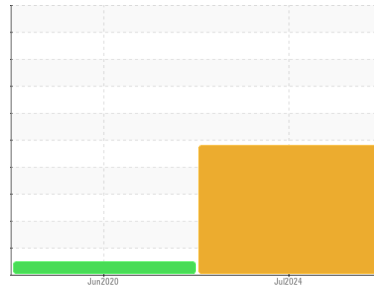

WATER



Area
STUFF ROOM E [99031153]
 Machine Id
KR-GR-003484 - AGITATOR (S/N STUFF E - 11513146)
 Component
Gearbox
 Fluid
SCHAEFFER 293A SUPREME GEAR LUBE NO TACK 220 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition. (Customer Sample Comment: 99031153)

Wear

All component wear rates are normal.

Contamination

Excessive free water present. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0128829	PCA0022168	---
Sample Date	Client Info		02 Jul 2024	29 Jun 2020	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Not Changed	N/A	---
Sample Status			SEVERE	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	25	0	---
Chromium	ppm	ASTM D5185m	>15	0	0	---
Nickel	ppm	ASTM D5185m	>15	0	1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	0	---
Lead	ppm	ASTM D5185m	>100	0	1	---
Copper	ppm	ASTM D5185m	>200	0	0	---
Tin	ppm	ASTM D5185m	>25	0	0	---
Antimony	ppm	ASTM D5185m	>5	---	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		8	<1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		147	3	---
Manganese	ppm	ASTM D5185m		1	0	---
Magnesium	ppm	ASTM D5185m		5	<1	---
Calcium	ppm	ASTM D5185m		24	11	---
Phosphorus	ppm	ASTM D5185m		700	406	---
Zinc	ppm	ASTM D5185m		27	3	---
Sulfur	ppm	ASTM D5185m		12858	713	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	3	4	---
Sodium	ppm	ASTM D5185m		3	0	---
Potassium	ppm	ASTM D5185m	>20	4	0	---
Water	%	ASTM D6304	>0.2	0.070	---	---
ppm Water	ppm	ASTM D6304	>2000	700	---	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	1897	---	---
Particles >6µm	ASTM D7647	>2500	1033	---	---
Particles >14µm	ASTM D7647	>640	176	---	---
Particles >21µm	ASTM D7647	>160	59	---	---
Particles >38µm	ASTM D7647	>40	9	---	---
Particles >71µm	ASTM D7647	>10	1	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/16	18/17/15	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.15	---	---


OIL ANALYSIS REPORT

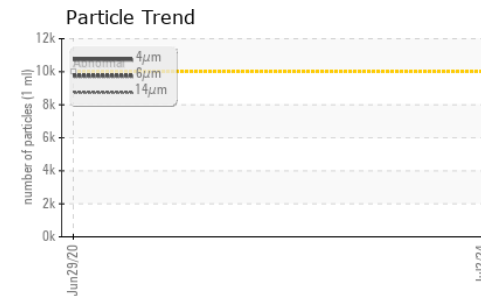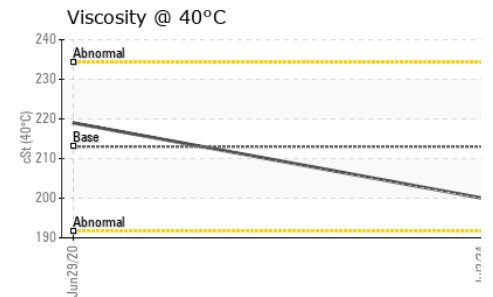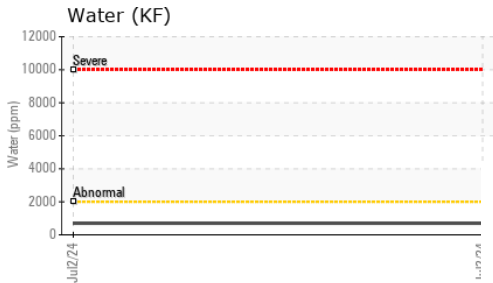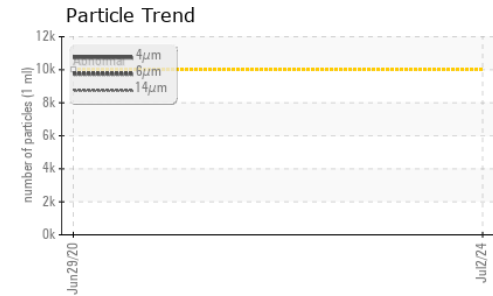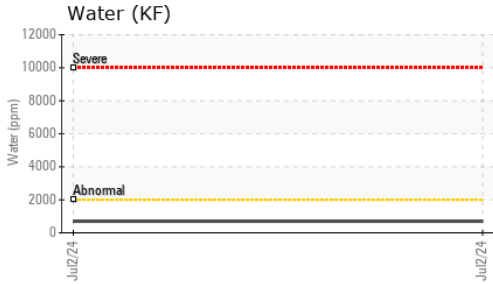




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	0.2%	NEG
Free Water	scalar	*Visual		▲ >10%	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 213	200	219	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

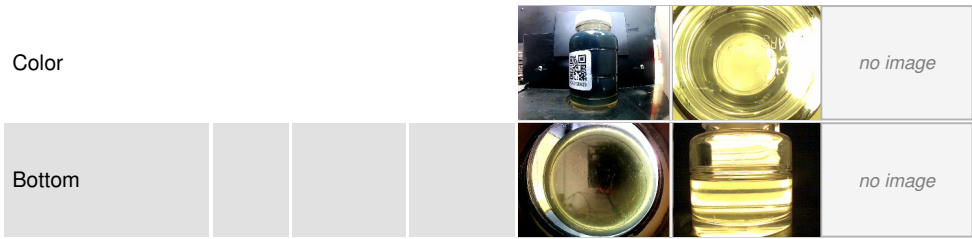

GRAPHS

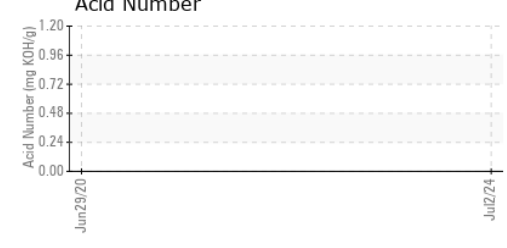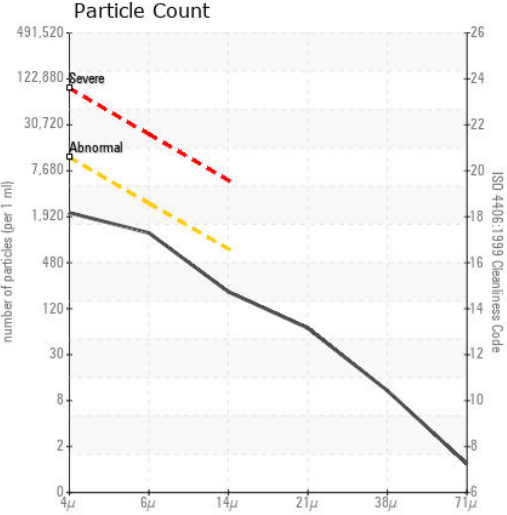

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0128829 **Received** : 05 Jul 2024
Lab Number : 06228497 **Tested** : 10 Jul 2024
Unique Number : 11111990 **Diagnosed** : 10 Jul 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

KraftHeinz - Kirksville - Plant 8333 PCA
 2504 INDUSTRIAL DR
 KIRKSVILLE, MO
 US 63501
 Contact: WALLACE WARD
 wallace.ward@kraftheinzcompany.com
 T: (660)627-1031
 F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)