




PROBLEM SUMMARY



Machine Id
927031
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)


Sample Rating Trend

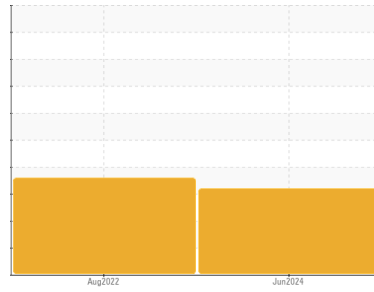

SOOT



COMPONENT CONDITION SUMMARY

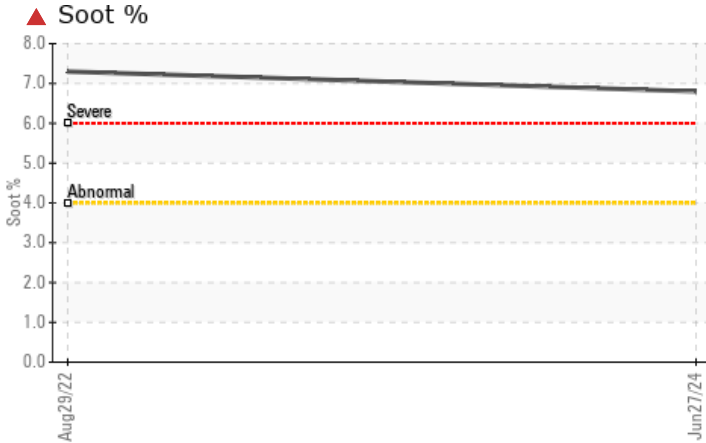

RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	---
Soot %	%	*ASTM D7844	>4	▲ 6.8	▲ 7.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 0.0	▲ 0.0	---

Customer Id: GFL912
 Sample No.: GFL0113064
 Lab Number: 06229438
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

HISTORICAL DIAGNOSIS

SOOT



29 Aug 2022 Diag: Don Baldrige

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value. All component wear rates are normal. There is an abnormal amount of solids and carbon present in the oil. The oil viscosity is higher than normal. The BN level is low.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

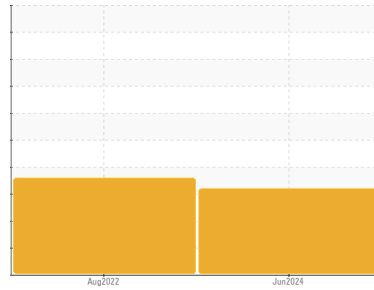

SOOT



Machine Id
927031
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

▲ Contamination

There is an abnormal amount of solids and carbon present in the oil.

▲ Fluid Condition

The BN level is low.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0113064	GFL0056002	---
Sample Date	Client Info		27 Jun 2024	29 Aug 2022	---
Machine Age	mls	Client Info	11878	0	---
Oil Age	mls	Client Info	599	0	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			SEVERE	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	34	32	---
Chromium	ppm	ASTM D5185m >20	1	1	---
Nickel	ppm	ASTM D5185m >5	0	<1	---
Titanium	ppm	ASTM D5185m >2	0	<1	---
Silver	ppm	ASTM D5185m >2	0	<1	---
Aluminum	ppm	ASTM D5185m >20	2	4	---
Lead	ppm	ASTM D5185m >40	2	4	---
Copper	ppm	ASTM D5185m >330	3	2	---
Tin	ppm	ASTM D5185m >15	0	2	---
Vanadium	ppm	ASTM D5185m	0	<1	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	17	220	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 60	57	105	---
Manganese	ppm	ASTM D5185m 0	<1	<1	---
Magnesium	ppm	ASTM D5185m 1010	809	580	---
Calcium	ppm	ASTM D5185m 1070	1189	1329	---
Phosphorus	ppm	ASTM D5185m 1150	941	582	---
Zinc	ppm	ASTM D5185m 1270	1103	734	---
Sulfur	ppm	ASTM D5185m 2060	3042	2057	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	5	---
Sodium	ppm	ASTM D5185m	3	1	---
Potassium	ppm	ASTM D5185m >20	<1	1	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	▲ 6.8	▲ 7.3	---
Nitration	Abs/cm	*ASTM D7624 >20	16.8	16.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	34.0	38.7	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.7	26.3	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	▲ 0.0	▲ 0.0	---




OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

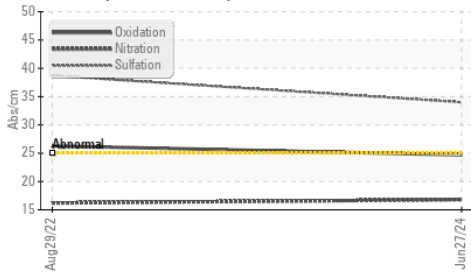


▲ Soot %

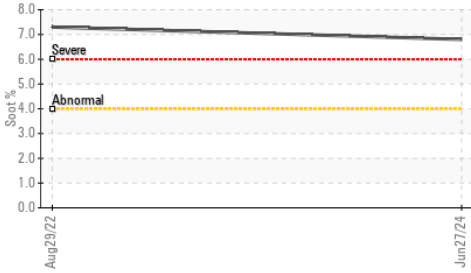

▲ Base Number

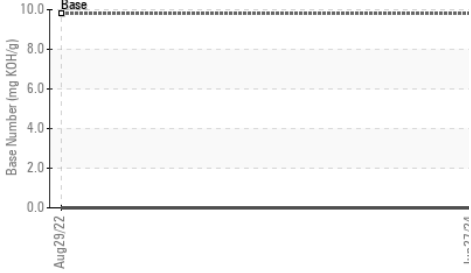

Viscosity @ 100°C

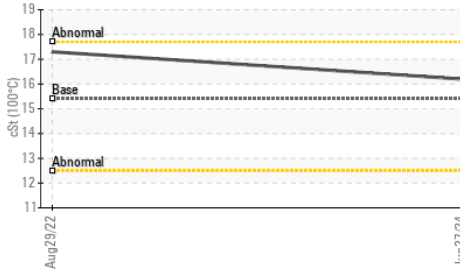


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15.4	16.2	▲ 17.3	---

GRAPHS


Ferrous Alloys

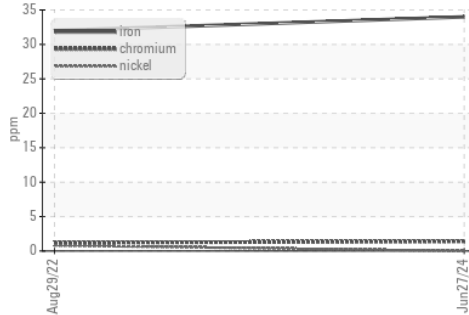


Non-ferrous Metals

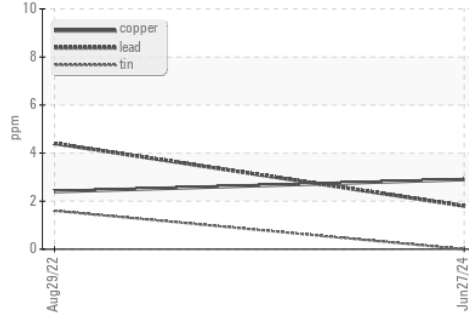

Viscosity @ 100°C

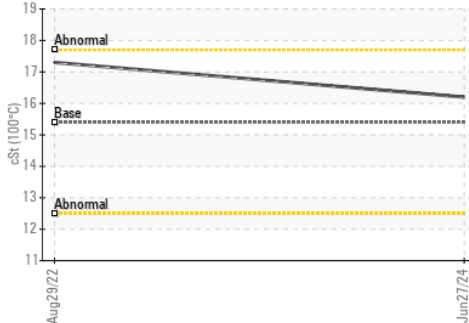

▲ Base Number

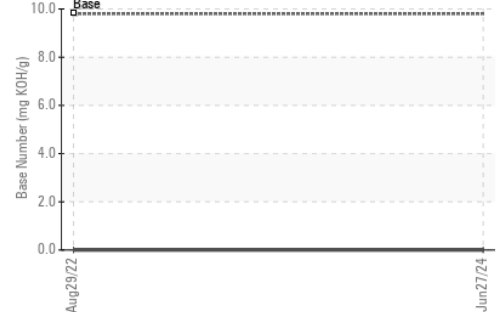

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113064
Lab Number : 06229438
Unique Number : 11112931
Test Package : FLEET

Received : 05 Jul 2024
Tested : 09 Jul 2024
Diagnosed : 09 Jul 2024 - Sean Felton

GFL Environmental - 912 - Fort Atkinson HC
 1215 Klement St.
 Fort Atkinson, WI
 US 53538

Contact: LEONARD KOZLEUCHAR
 leonard.kozleuchar@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (262)210-6528

F: